

Linear

20 Series

Linear luminaire




Linear luminaire. 40 W. Four beam angles, 20° to 80°.
3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power 40 W	Luminous flux 3800–4100 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 20°, 40°, 60°, 80°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Surface, Suspended	Control 0-10V, Triac, DALI, Casambi

Finishes
White, Black, Red, Yellow, Purple


Dimensions

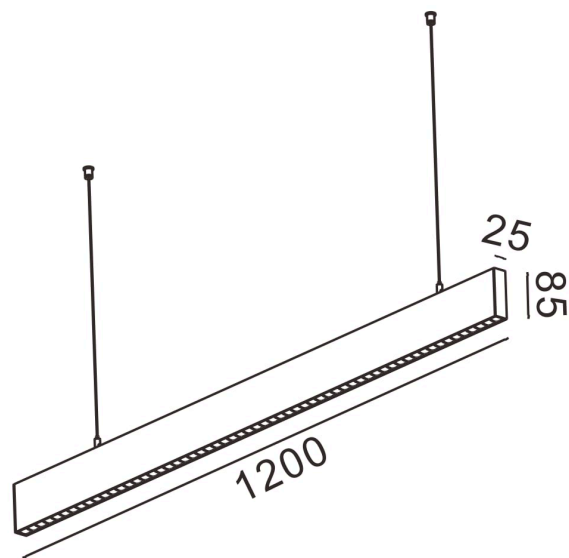

Models

Code	Version	Power	Flux	CRI	Size	Beam
P3-3220H	Pendant	40 W	3800–4100 lm	97 CRI	L1200 x W25 x H85 mm	20° 40° 60° 80°
C3-3220H	Surface mounted	40 W	3800–4100 lm	97 CRI		20° 40° 60° 80°


Finishes




Black




White



Red



Yellow




Purple

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-3220H, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-3220H, 40 W, 20° beam

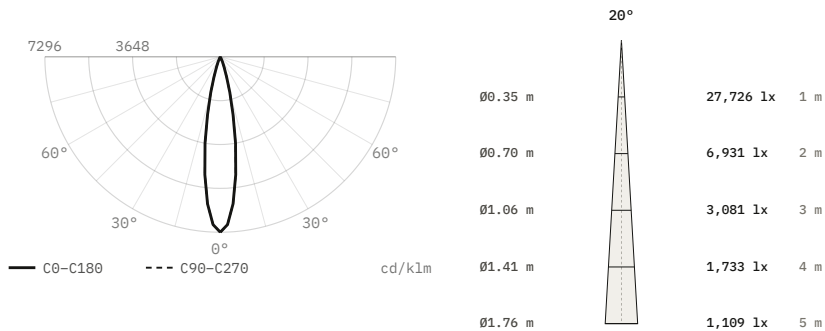


Luminous flux	3,800 lm
Efficacy	95 lm/W
Peak intensity	27,726 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	1200 × 25 × 85 mm
Data	Calculated from catalogue data

P3-3220H, 40 W, 40° beam

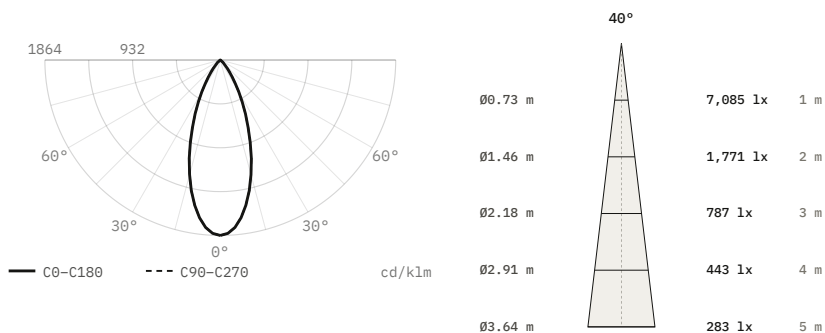


Luminous flux	3,800 lm
Efficacy	95 lm/W
Peak intensity	7,085 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	1200 × 25 × 85 mm
Data	Calculated from catalogue data

P3-3220H, 40 W, 60° beam

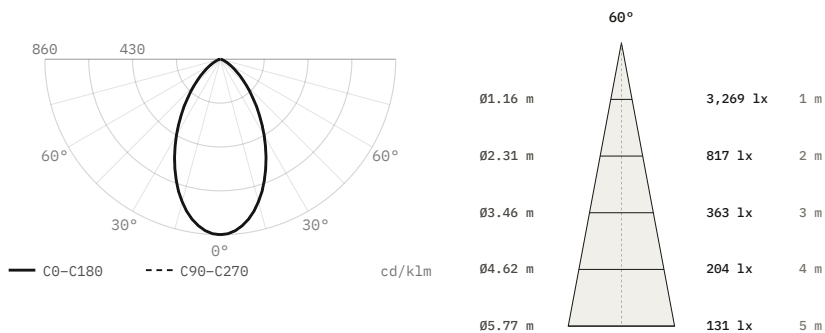

Luminous flux	3,800 lm
Efficacy	95 lm/W
Peak intensity	3,269 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	1200 × 25 × 85 mm
Data	Calculated from catalogue data

P3-3220H, 40 W, 80° beam

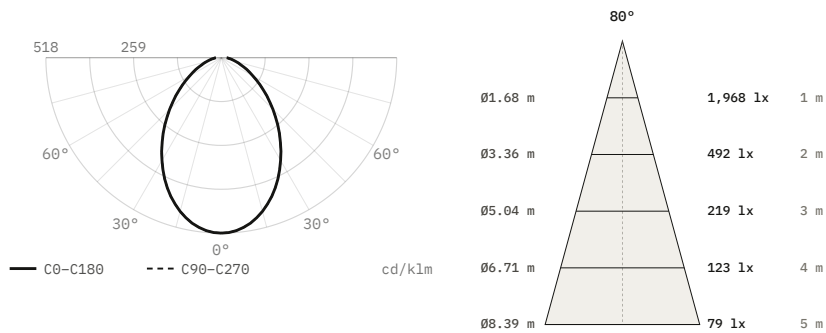

Luminous flux	3,800 lm
Efficacy	95 lm/W
Peak intensity	1,968 cd, 518 cd/klm
Beam angle (50%)	80°
Field angle (10%)	145.8°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	36.2 / 48.2 / 15.7 %
Size	1200 × 25 × 85 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.