

Linear

2835 Neon 6.5x11


Linear luminaire



Linear luminaire. 9.6 W. 113.7° beam. 4000 K. IP66. 97 CRI. — LED source: Citizen

Power 9.6 W	Voltage 24 V	Luminous flux 275 lm/m
Colour temperature 4000 K	CRI 97 CRI	Beam angles 113.7°
IP rating IP66	Certifications CE, RoHS, UL	Mounting Recessed, Surface
Finishes Black		

Dimensions

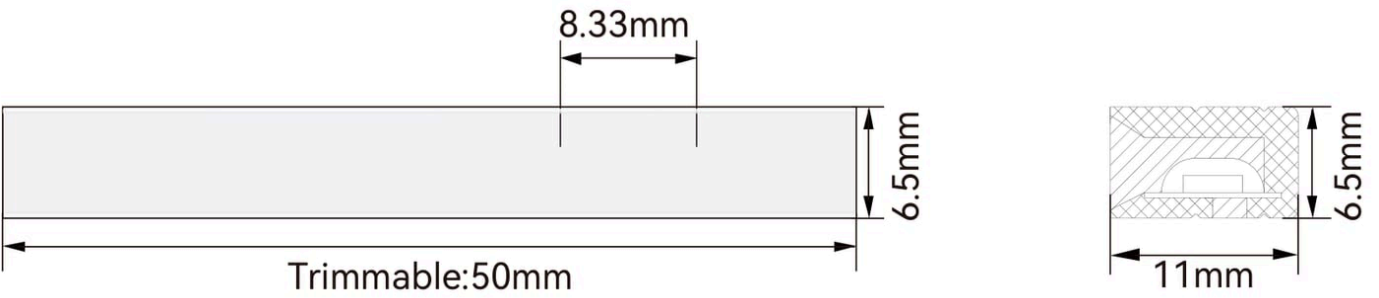


Models

Code	Power	Voltage	Flux	CRI	Size	Beam	Notes
OL-DNQF24120T09-8A28	9.6 W	24 V	275 lm/m	97 CRI	W11 x H6.5 mm (profile section 11 mm x 6.5 mm); PCB width 8 mm	113.7°	Power per metre

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


9.6 W

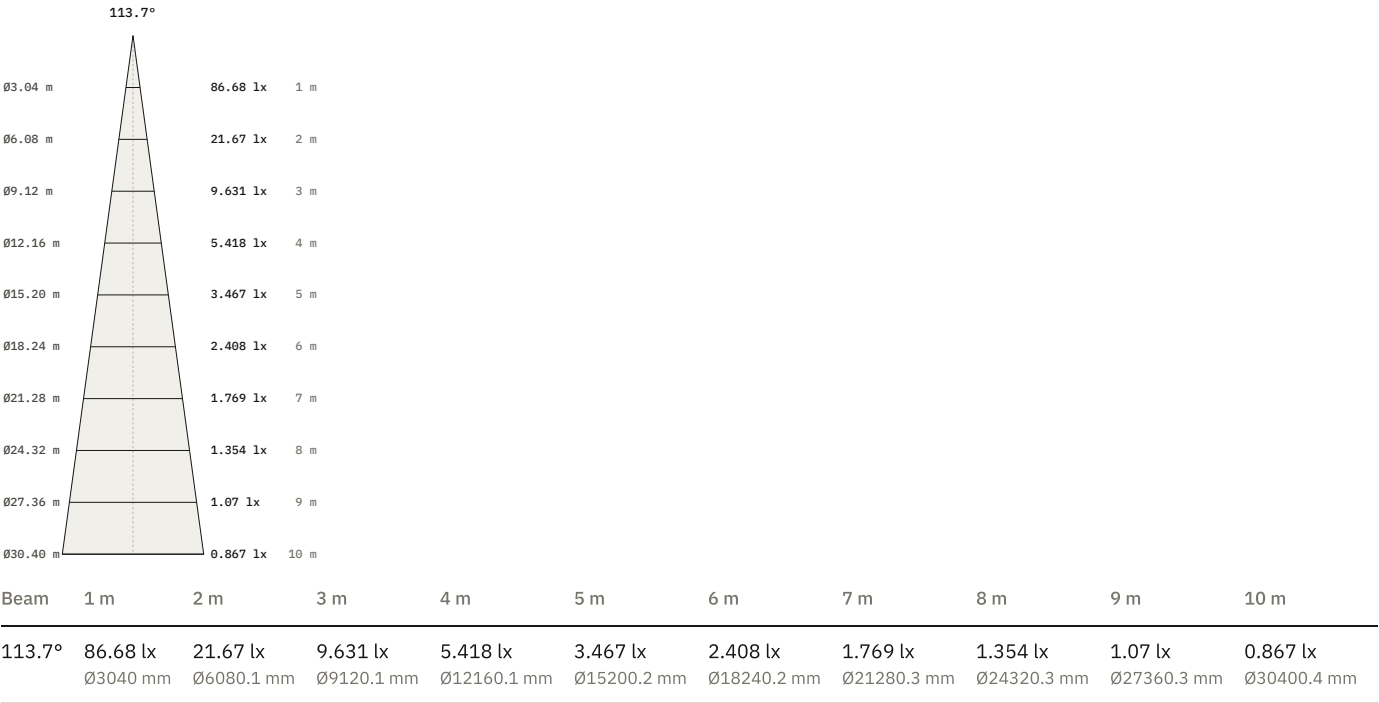

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-DNQF24120T09-8A28, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-DNQF24120T09-8A28, 9.6 W, 113.7° beam

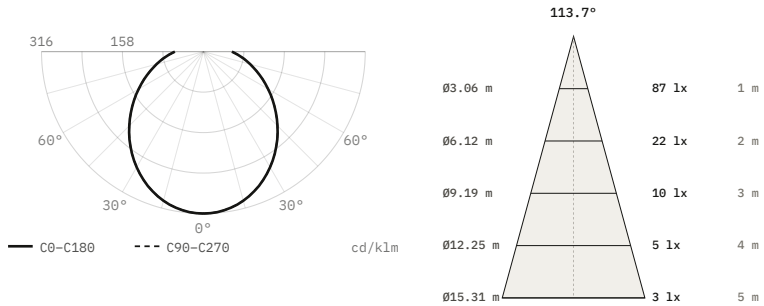

Luminous flux	274 lm
Efficacy	29 lm/W
Peak intensity	87 cd, 316 cd/klm
Beam angle (50%)	113.7°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	24.2 / 45.8 / 30 %
Size	11 × 0 × 6.5 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.