


Linear

30 Series P3-3230F

Linear luminaire

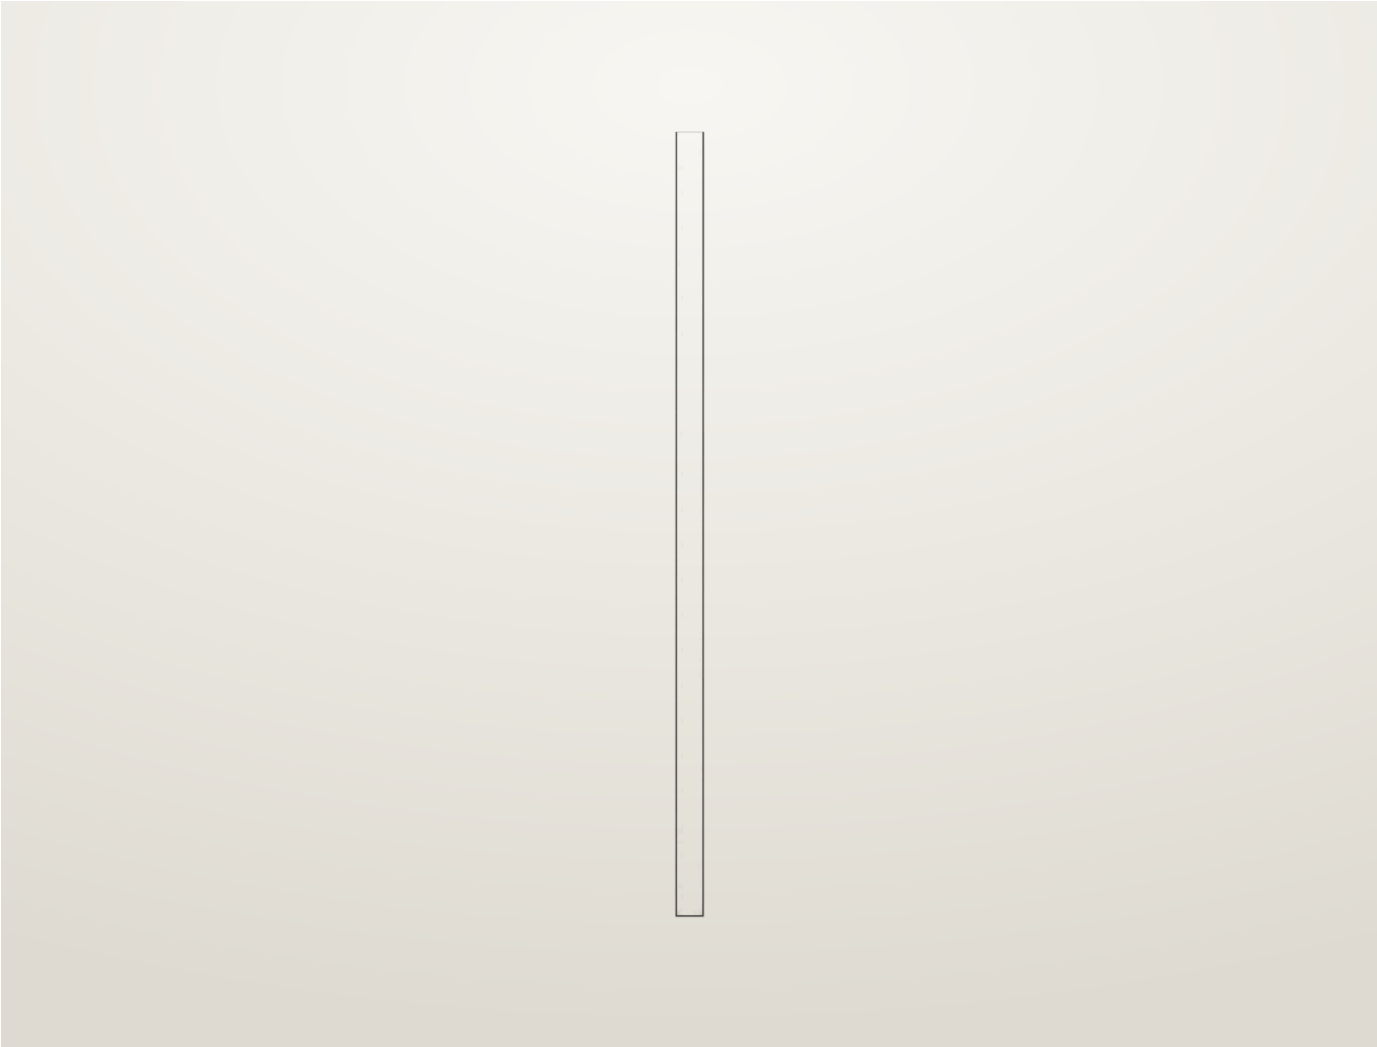


Linear luminaire. 40 W. Three beam angles, 24° to 45°.
3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power 40 W	Luminous flux 5000–5100 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 24°, 36°, 45°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Surface, Suspended	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

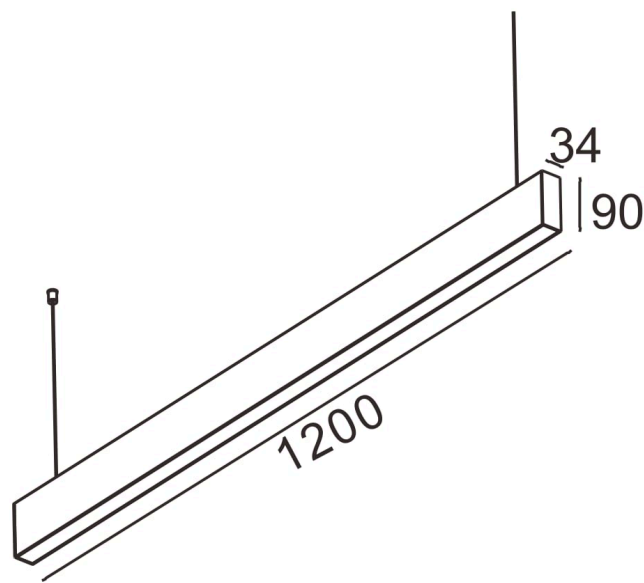


Models

Code	Version	Power	Flux	CRI	Size	Beam
P3-3230F	Pendant, flood	40 W	5000–5100 lm	97 CRI	L1200 x W34 x H90 mm	24° 36° 45°
C3-3230F	Surface mounted, flood	40 W	5000–5100 lm	97 CRI	L1200 x W34 x H90 mm	24° 36° 45°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-3230F, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-3230F, 40 W, 24° beam

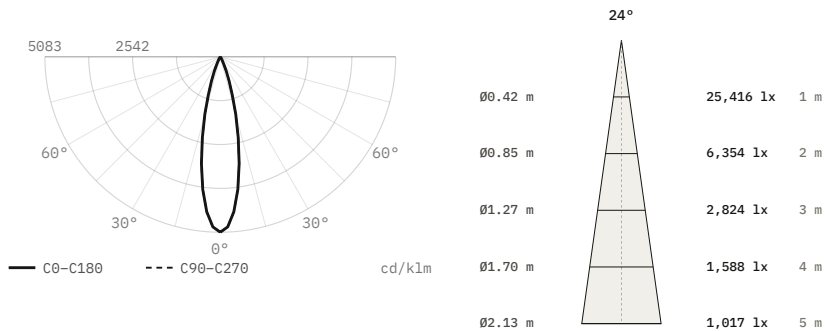


Luminous flux	5,000 lm
Efficacy	125 lm/W
Peak intensity	25,416 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	1200 × 34 × 90 mm
Data	Calculated from catalogue data

P3-3230F, 40 W, 36° beam

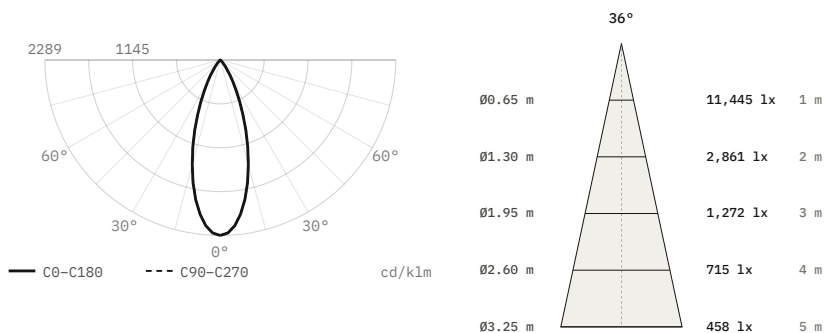

Luminous flux	5,000 lm
Efficacy	125 lm/W
Peak intensity	11,445 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	1200 × 34 × 90 mm
Data	Calculated from catalogue data

P3-3230F, 40 W, 45° beam

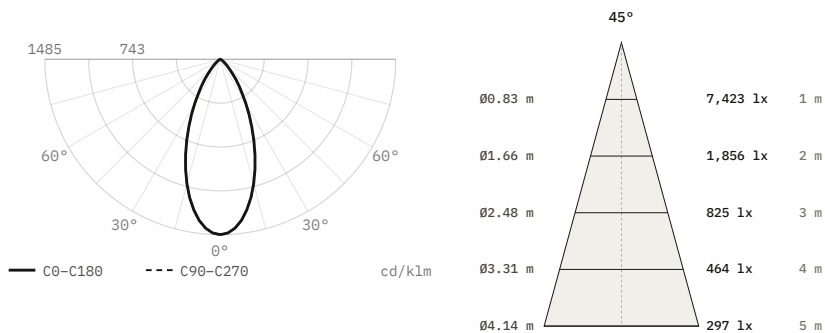

Luminous flux	5,000 lm
Efficacy	125 lm/W
Peak intensity	7,423 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	1200 × 34 × 90 mm
Data	Calculated from catalogue data

