Linear

30 Series P3-3232

Linear luminaire

Linear luminaire.

- LED source: Citizen
- UGR <19

Luminous flux **2700–2800 lm**	Colour temperature **3000 K, 4000 K**	CRI **97 CRI**
Beam angles **24°, 36°, 45°**	IP rating **IP20**	Certifications **CE, RoHS, EMC, LVD**
Mounting **Surface, Suspended**	Control **DALI, 0-10V, Triac, Casambi**	Finishes **White, Black, Grey**

Dimensions

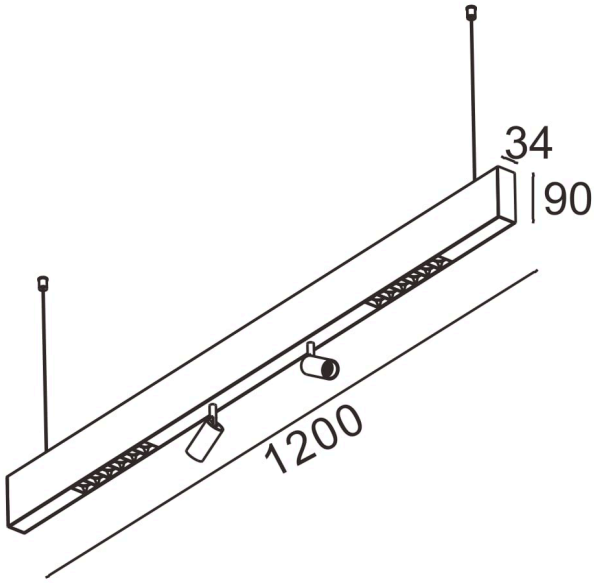

Models

Code	Version	Flux	CRI	Size	Beam
P3-3232	Pendant	2700–2800 lm	97 CRI	L1200 x W34 x H90 mm	24° 36° 45°
C3-3232	Surface mounted	2700–2800 lm	97 CRI	L1200 x W34 x H90 mm	24° 36° 45°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-3232, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-3232, 24° beam

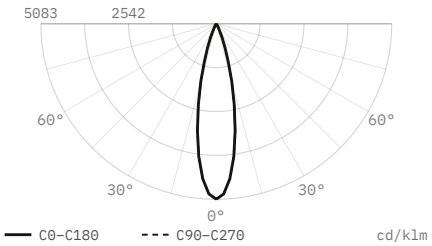

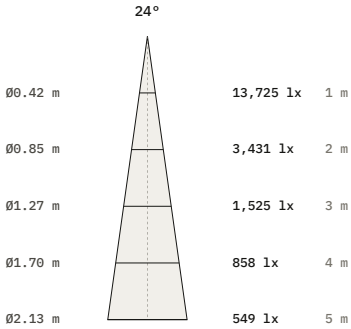

Luminous flux	2,700 lm
Peak intensity	13,725 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	1200 × 34 × 90 mm
Data	Calculated from catalogue data

P3-3232, 36° beam

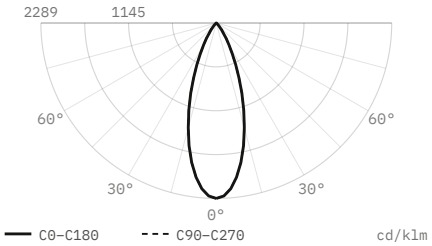

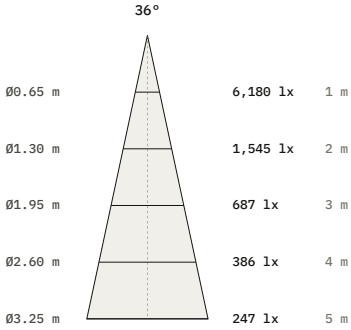

Luminous flux	2,700 lm
Peak intensity	6,180 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	1200 × 34 × 90 mm
Data	Calculated from catalogue data

P3-3232, 45° beam

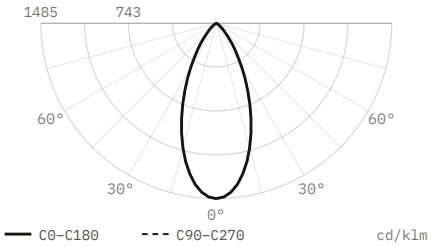

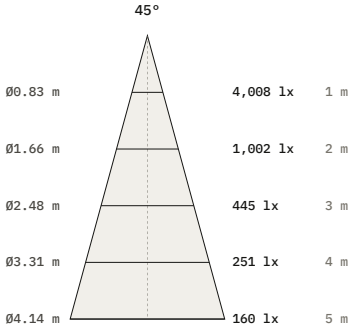

Luminous flux	2,700 lm
Peak intensity	4,008 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	1200 × 34 × 90 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.