

Linear

30 Series P3-3233

Linear luminaire




Linear luminaire.

- LED source: Citizen
- UGR <19

Luminous flux 2700–2800 lm	Colour temperature 3000 K, 4000 K	CRI 97 CRI
Beam angles 24°, 36°, 45°	IP rating IP20	Certifications CE, RoHS, EMC, LVD
Mounting Surface, Suspended	Control DALI, 0-10V, Triac, Casambi	Finishes White, Black, Grey

Dimensions

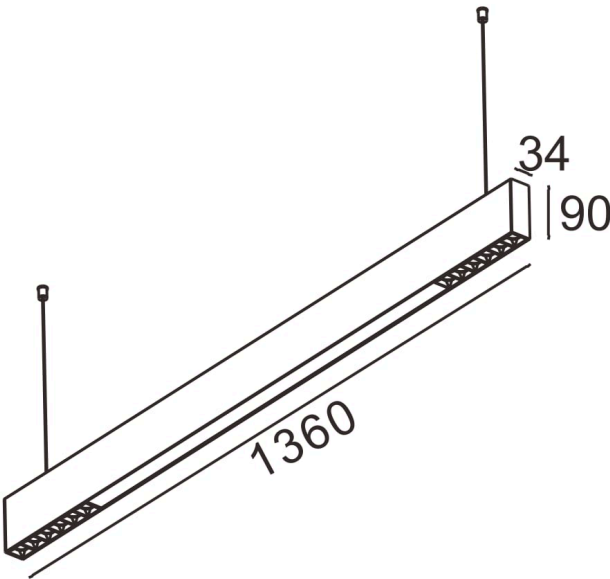


Models

Code	Version	Flux	CRI	Size	Beam
P3-3233	Pendant	2700–2800 lm	97 CRI	L1360 x W34 x H90 mm	24° 36° 45°
C3-3233	Surface mounted	2700–2800 lm	97 CRI	L1360 x W34 x H90 mm	24° 36° 45°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-3233, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-3233, 24° beam

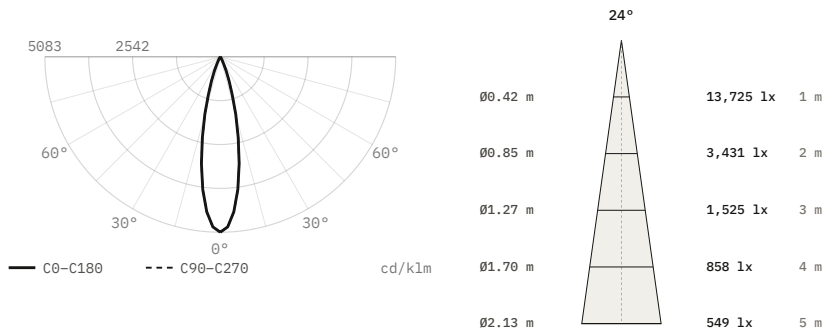


Luminous flux	2,700 lm
Peak intensity	13,725 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	1360 × 34 × 90 mm
Data	Calculated from catalogue data

P3-3233, 36° beam

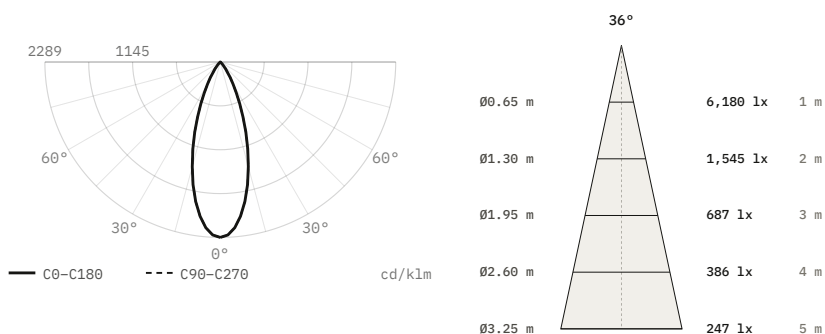

Luminous flux	2,700 lm
Peak intensity	6,180 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	1360 × 34 × 90 mm
Data	Calculated from catalogue data

P3-3233, 45° beam

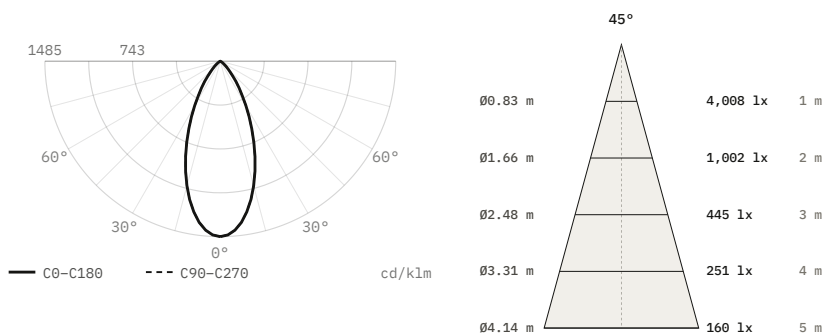

Luminous flux	2,700 lm
Peak intensity	4,008 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	1360 × 34 × 90 mm
Data	Calculated from catalogue data