

Linear

3245 Series

Linear luminaire




Linear luminaire. 40 W. Four beam angles, 30° to 110°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 40 W	Luminous flux 6000–6100 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 30°, 60°, 90°, 110°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Surface, Suspended	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

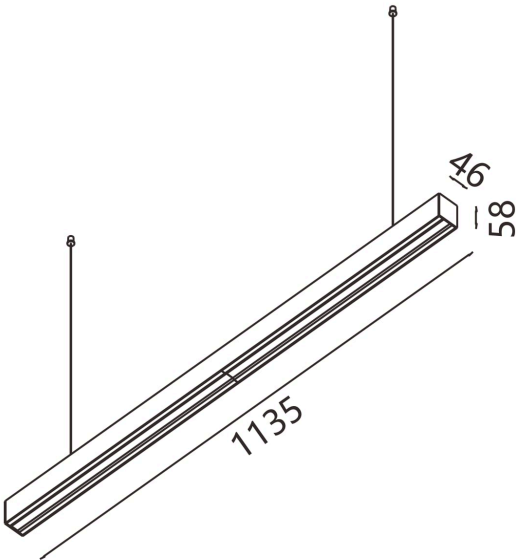


Models

Code	Version	Power	Flux	CRI	Size	Beam
P3-3245	Pendant	40 W	6000–6100 lm	97 CRI	L1135 x W46 x H58 mm	30° 60° 90° 110°
C3-3245	Surface mounted	40 W	6000–6100 lm	97 CRI	L1135 x W46 x H58 mm	30° 60° 90° 110°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-3245, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-3245, 40 W, 30° beam

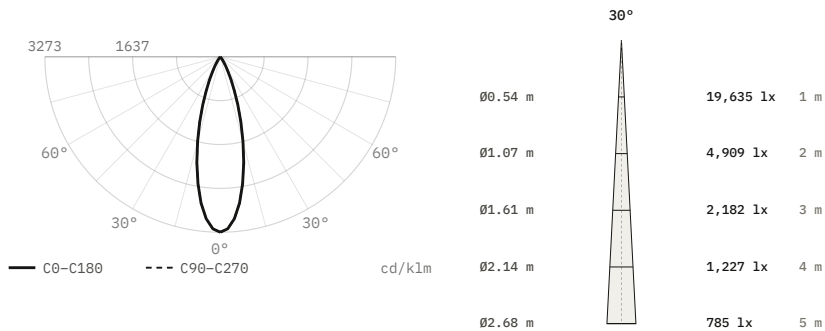


Luminous flux	6,000 lm
Efficacy	150 lm/W
Peak intensity	19,635 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	1135 × 46 × 58 mm
Data	Calculated from catalogue data

P3-3245, 40 W, 60° beam

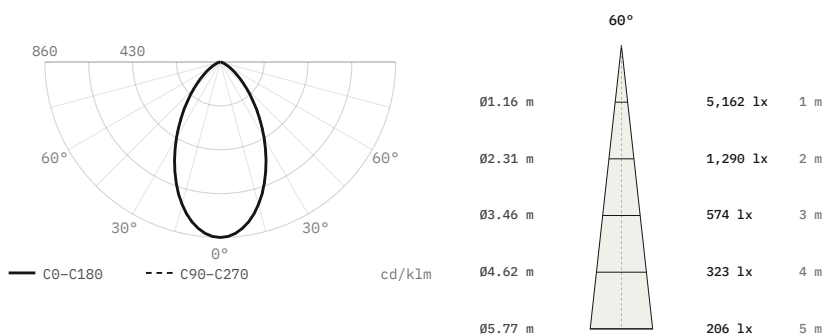


Luminous flux	6,000 lm
Efficacy	150 lm/W
Peak intensity	5,162 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	1135 × 46 × 58 mm
Data	Calculated from catalogue data

P3-3245, 40 W, 90° beam

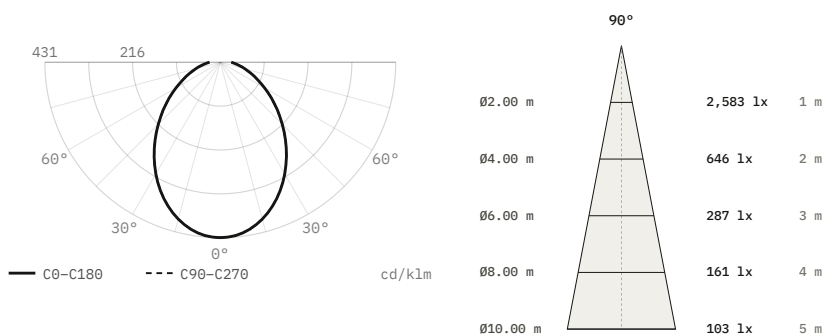

Luminous flux	6,000 lm
Efficacy	150 lm/W
Peak intensity	2,583 cd, 431 cd/klm
Beam angle (50%)	90°
Field angle (10%)	164°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	31.2 / 48 / 20.8 %
Size	1135 × 46 × 58 mm
Data	Calculated from catalogue data

P3-3245, 40 W, 110° beam

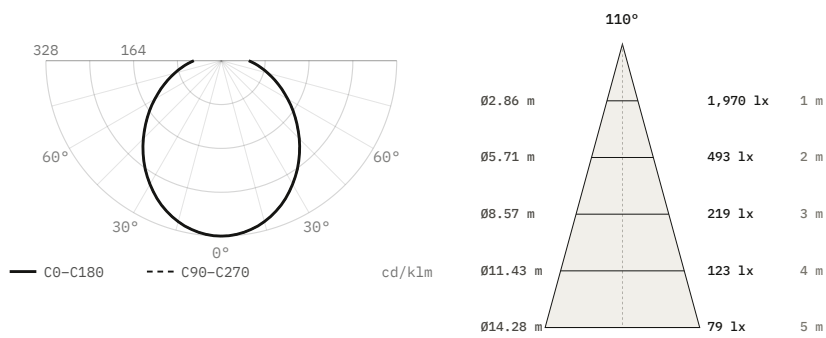

Luminous flux	6,000 lm
Efficacy	150 lm/W
Peak intensity	1,970 cd, 328 cd/klm
Beam angle (50%)	110°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	25 / 46.2 / 28.8 %
Size	1135 × 46 × 58 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.