

Track spotlights

6182 Series S3-6182

Track spotlight




Track spotlight. 24 W. 15° or 60° beam. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 24 W	Luminous flux 2400–2500 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 60°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Recessed, Surface, Magnetic track	Control DALI-2, 0-10V, Triac
Finishes White, Black		

Dimensions

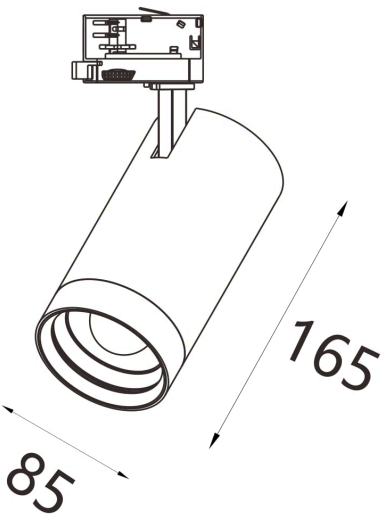


Models

Code	Version	Power	Flux	CRI	Size	Beam
S3-6182	Track	24 W	2400–2500 lm	97 CRI	85 × 165 mm	15° 60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

24 W

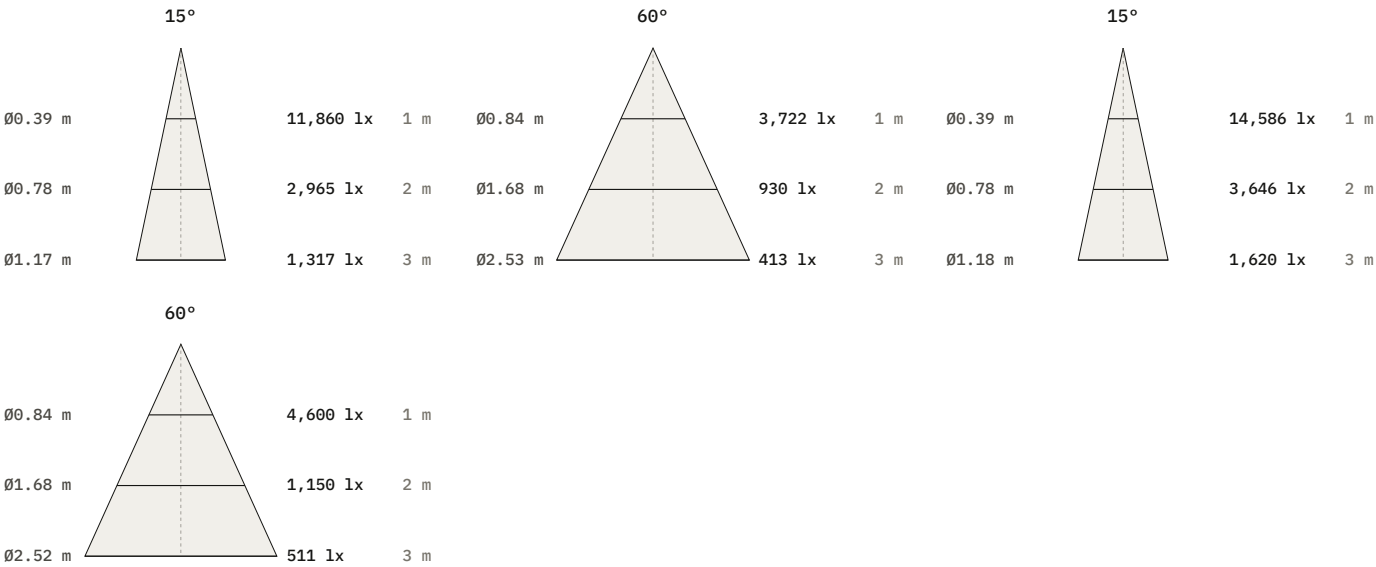


Beam	1 m	2 m	3 m
15°	11,860 lx Ø390 mm	2,965 lx Ø780 mm	1,317 lx Ø1170 mm
60°	3,722 lx Ø840 mm	930 lx Ø1680 mm	413 lx Ø2530 mm
15°	14,586 lx Ø390 mm	3,646 lx Ø780 mm	1,620 lx Ø1180 mm
60°	4,600 lx Ø840 mm	1,150 lx Ø1680 mm	511 lx Ø2520 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-6182, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-6182, 24 W, 15° beam

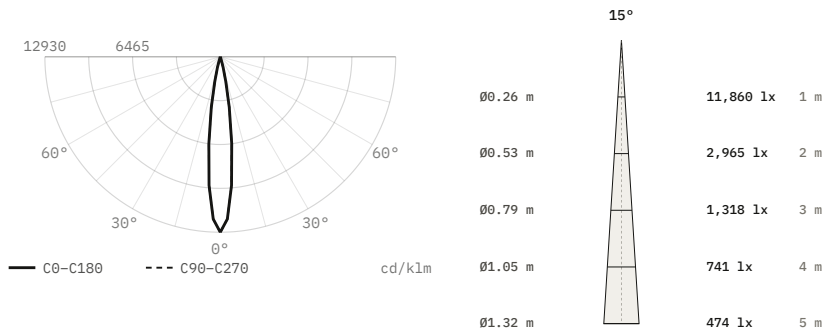

Luminous flux	917 lm
Efficacy	38 lm/W
Peak intensity	11,860 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	165 × 85 mm
Data	Calculated from catalogue data

S3-6182, 24 W, 60° beam

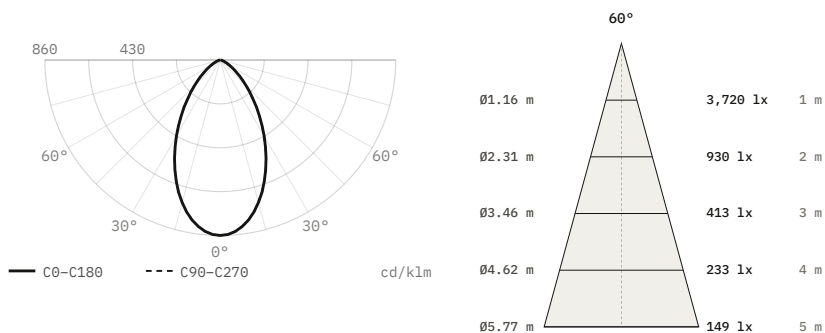

Luminous flux	4,324 lm
Efficacy	180 lm/W
Peak intensity	3,720 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	165 × 85 mm
Data	Calculated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.