

Linear

Bet CH0218


Linear luminaire



Linear luminaire. 22 W. Three beam angles, 15° to 38°. — LED source: Citizen
2700, 3000, 4000 K. 97 CRI.

Power 22 W	Voltage 230 V AC	Luminous flux 1706 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 38°
IP rating IP20	Certifications CE	Mounting Surface
Finishes White		

Dimensions

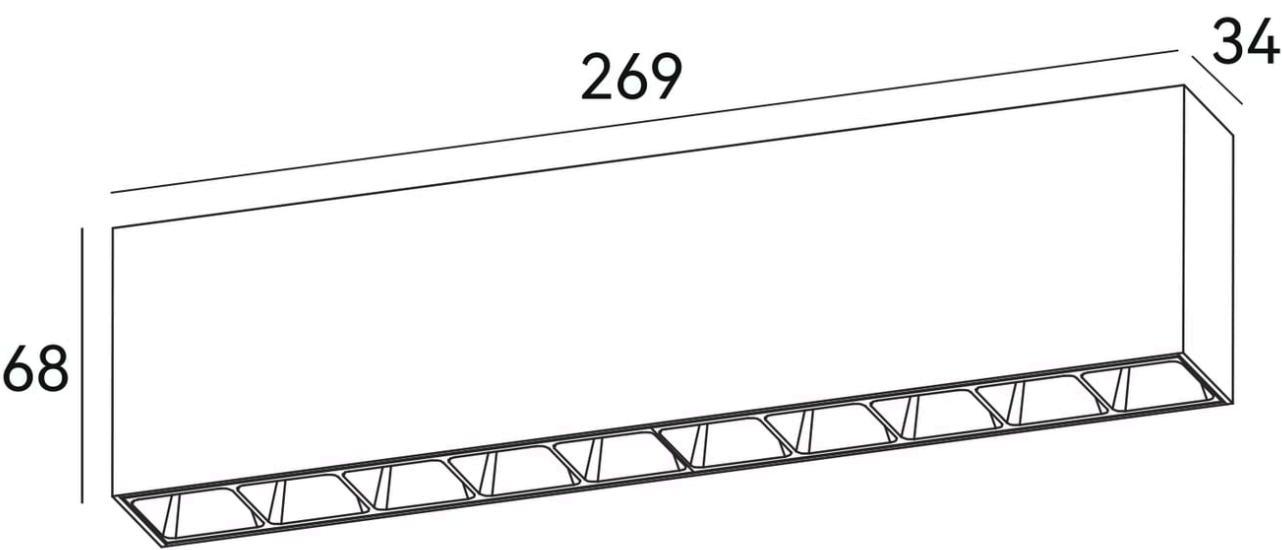

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CH0218	22 W	230 V AC	1706 lm	97 CRI	269 × 34 × 68 mm	15° 24° 38°

Finishes



Black




White

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0218, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0218, 22 W, 15° beam

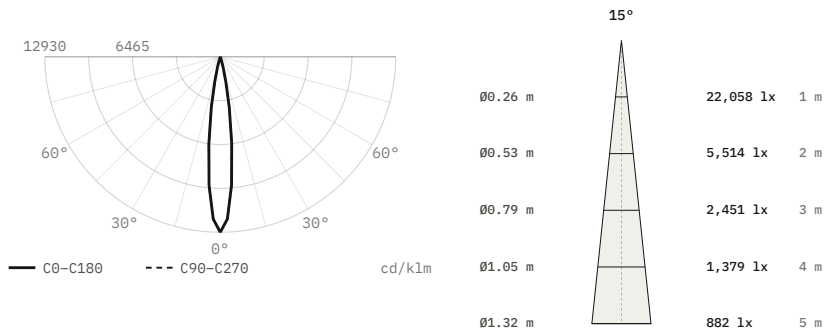


Luminous flux	1,706 lm
Efficacy	78 lm/W
Peak intensity	22,058 cd, 12,930 cd/k1m
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	269 × 34 × 68 mm
Data	Calculated from catalogue data

CH0218, 22 W, 24° beam

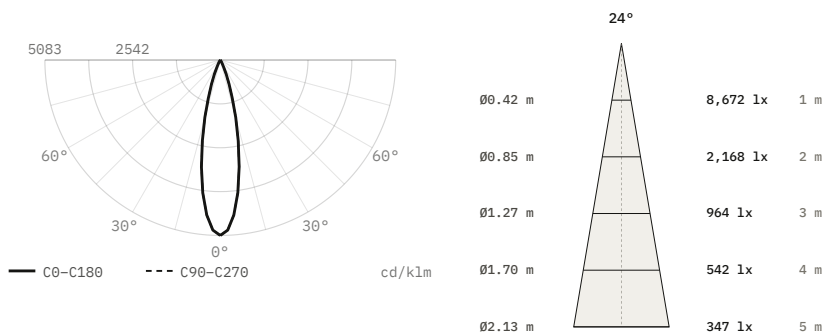

Luminous flux	1,706 lm
Efficacy	78 lm/W
Peak intensity	8,672 cd, 5,083 cd/k1m
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	269 × 34 × 68 mm
Data	Calculated from catalogue data

CH0218, 22 W, 38° beam

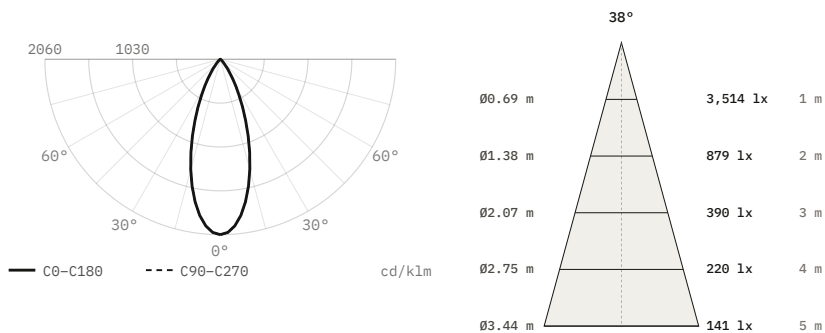

Luminous flux	1,706 lm
Efficacy	78 lm/W
Peak intensity	3,514 cd, 2,060 cd/k1m
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	269 × 34 × 68 mm
Data	Calculated from catalogue data

