Linear

Bet CH0222

Linear luminaire

Linear luminaire. 22 W. Three beam angles, 15° to 38°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **22 W**	Voltage **230 V AC**	Luminous flux **1706 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 38°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **White**		

Dimensions

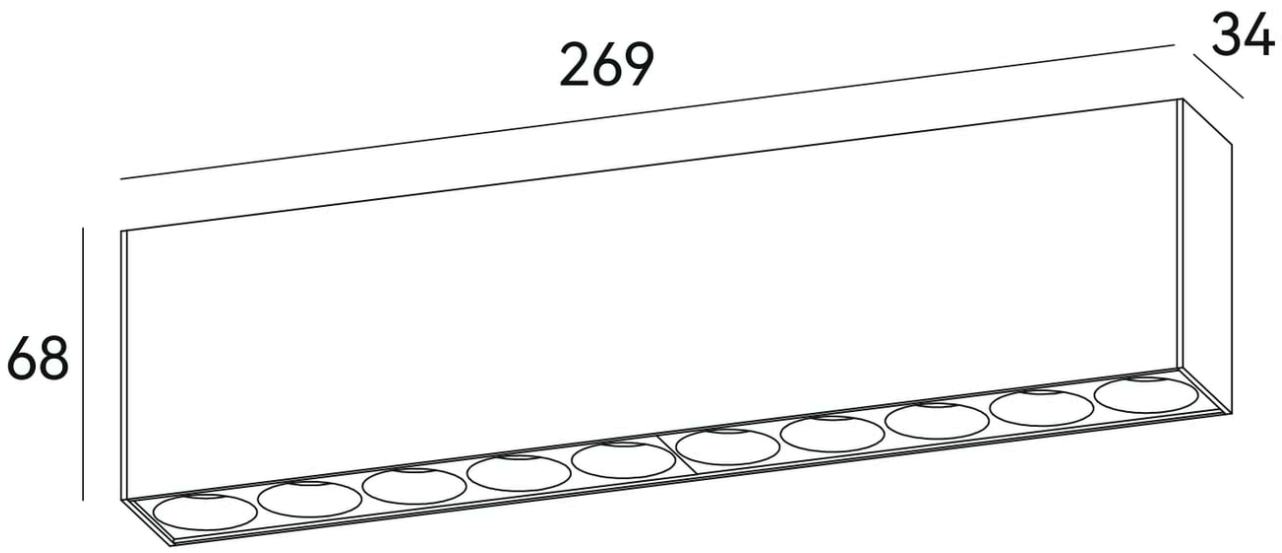

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CH0222	22 W	230 V AC	1706 lm	97 CRI	269 × 34 × 68 mm	15° 24° 38°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0222, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0222, 22 W, 15° beam

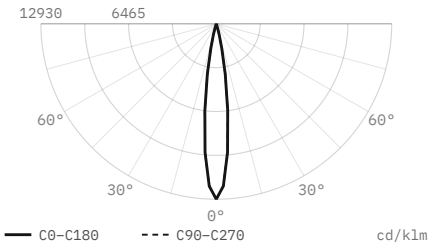

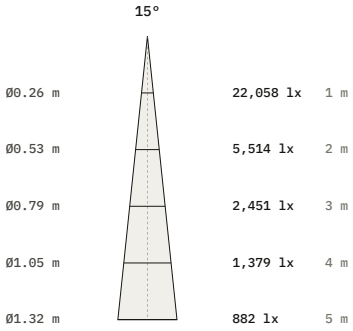

Luminous flux	1,706 lm
Efficacy	78 lm/W
Peak intensity	22,058 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	269 × 34 × 68 mm
Data	Calculated from catalogue data

CH0222, 22 W, 24° beam

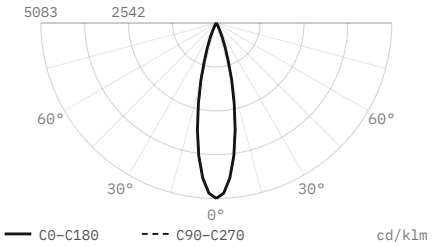

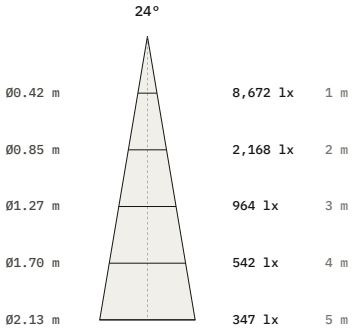

Luminous flux	1,706 lm
Efficacy	78 lm/W
Peak intensity	8,672 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	269 × 34 × 68 mm
Data	Calculated from catalogue data

CH0222, 22 W, 38° beam

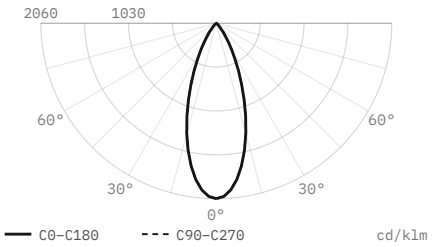

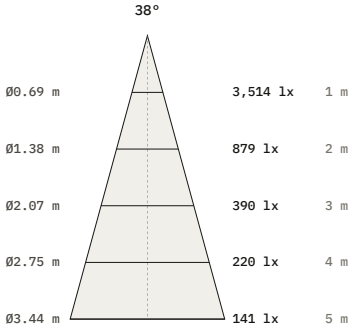

Luminous flux	1,706 lm
Efficacy	78 lm/W
Peak intensity	3,514 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	269 × 34 × 68 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.