

Recessed

Bet DL0058

Recessed spotlight




Recessed spotlight. 7 W. 34° or 48° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø39 mm
- LED source: Citizen

Power 7 W	Voltage max 37 V	Luminous flux 580 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 34°, 48°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

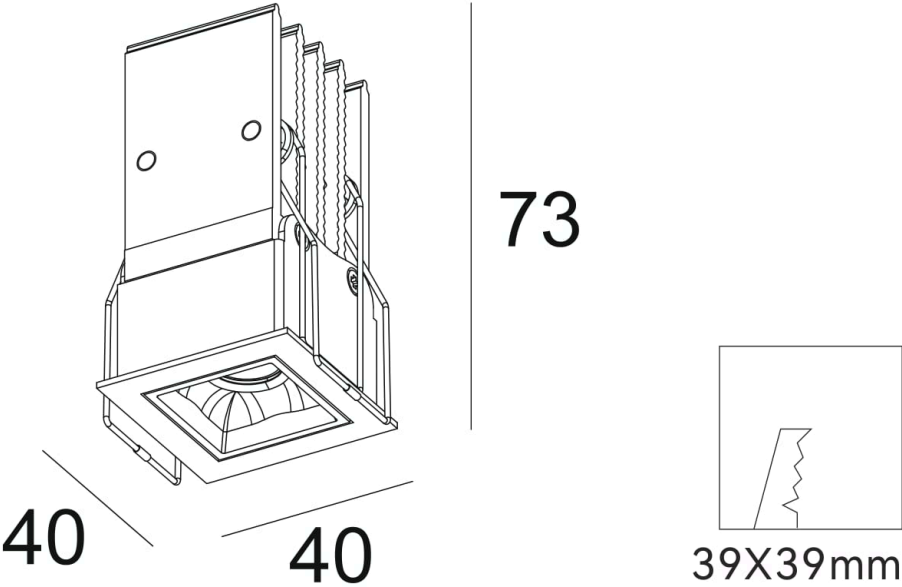


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0058	7 W	max 37 V	580 lm	97 CRI	40 × 40 x H73 mm	Ø39 mm	34° 48°	180 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0058, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0058, 7 W, 34° beam

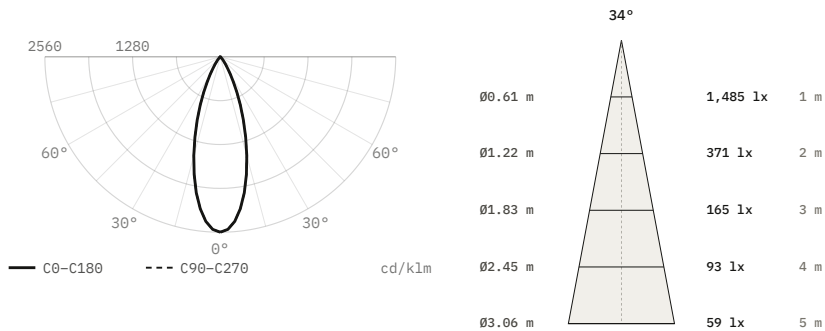

Luminous flux	580 lm
Efficacy	83 lm/W
Peak intensity	1,485 cd, 2,560 cd/klm
Beam angle (50%)	34°
Field angle (10%)	62°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	89 / 11 / 0 %
Size	40 × 40 × 73 mm
Data	Calculated from catalogue data

DL0058, 7 W, 48° beam

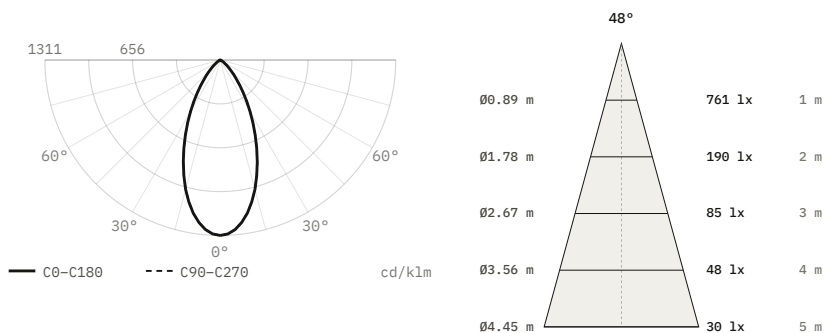

Luminous flux	580 lm
Efficacy	83 lm/W
Peak intensity	761 cd, 1,311 cd/klm
Beam angle (50%)	48°
Field angle (10%)	87.5°
Cut-off angle (2.5%)	55°
Flux 0–30° / 30–60° / 60–90°	67.7 / 31.2 / 1.1 %
Size	40 × 40 × 73 mm
Data	Calculated from catalogue data