


Recessed

Bet DL0918

Recessed spotlight

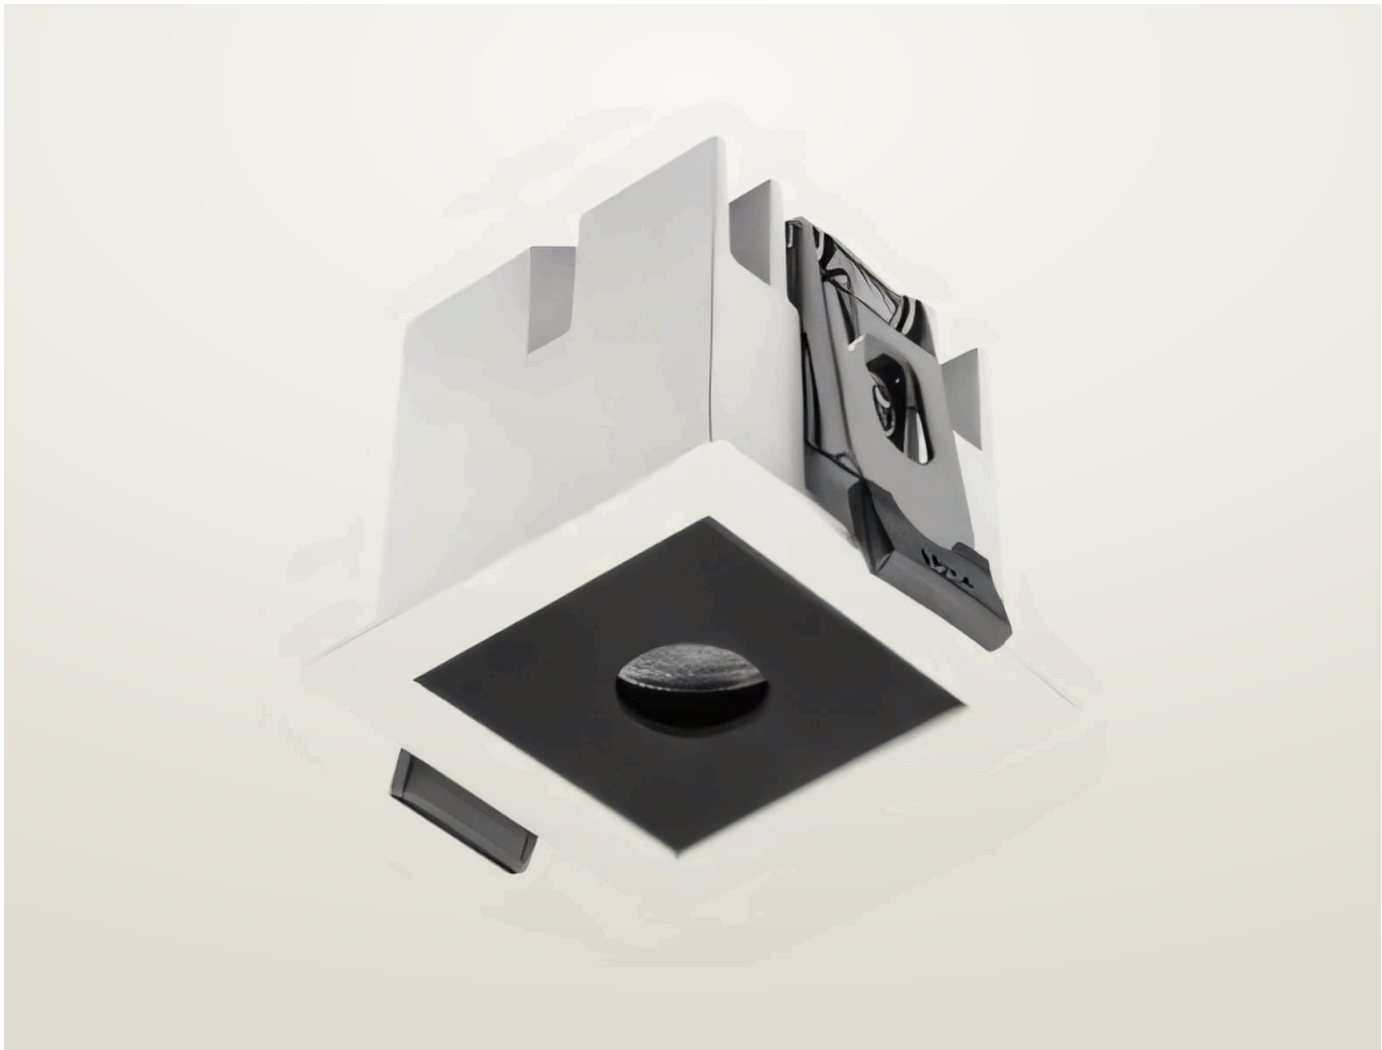


Recessed spotlight. 4 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø45 mm
- LED source: Citizen

Power 4 W	Voltage max 36 V	Luminous flux 360 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

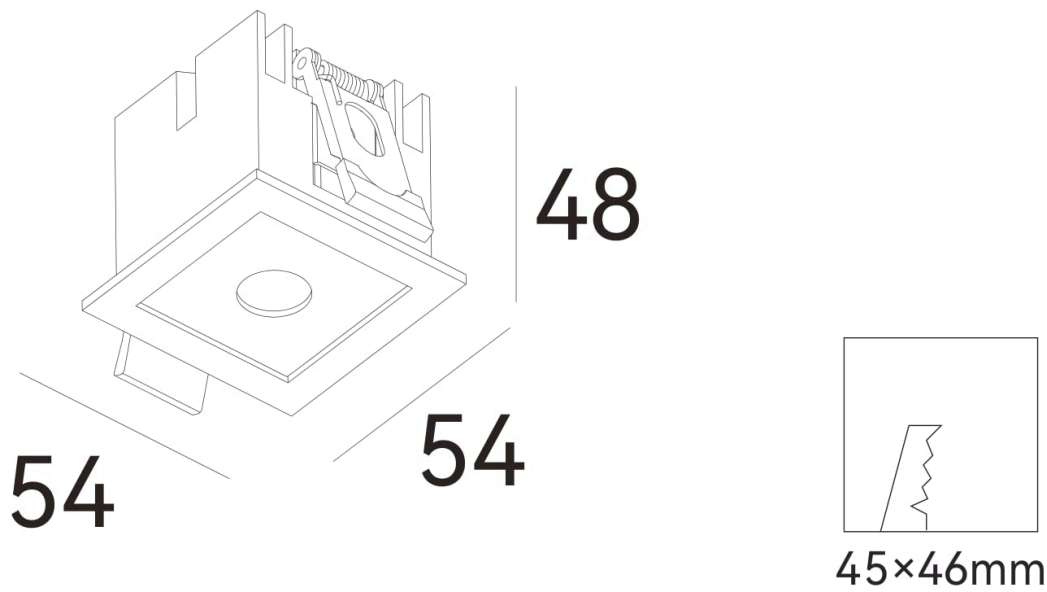


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0918	4 W	max 36 V	360 lm	97 CRI	54 × 54 x H48 mm	Ø45 mm	24° 36°	150 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0918, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0918, 4 W, 24° beam

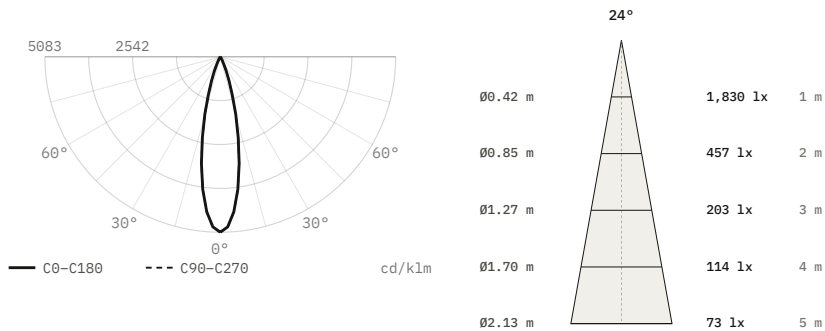

Luminous flux	360 lm
Efficacy	90 lm/W
Peak intensity	1,830 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	54 × 54 × 48 mm
Data	Calculated from catalogue data

DL0918, 4 W, 36° beam

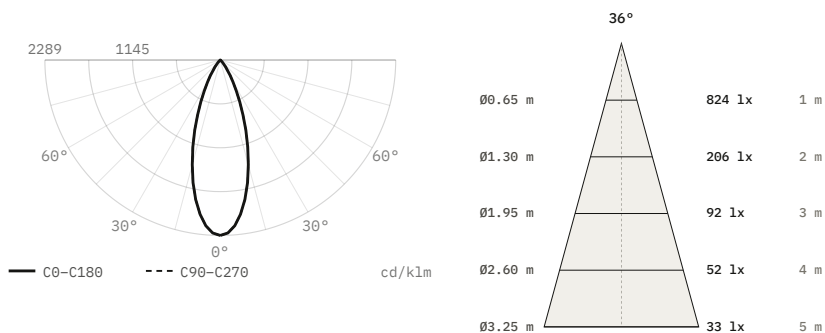

Luminous flux	360 lm
Efficacy	90 lm/W
Peak intensity	824 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	54 × 54 × 48 mm
Data	Calculated from catalogue data