

Recessed

Bet DL0923

Recessed spotlight




Recessed spotlight. 27 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø382 mm
- LED source: Citizen

Power 27 W	Voltage max 30 V	Luminous flux 2160 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

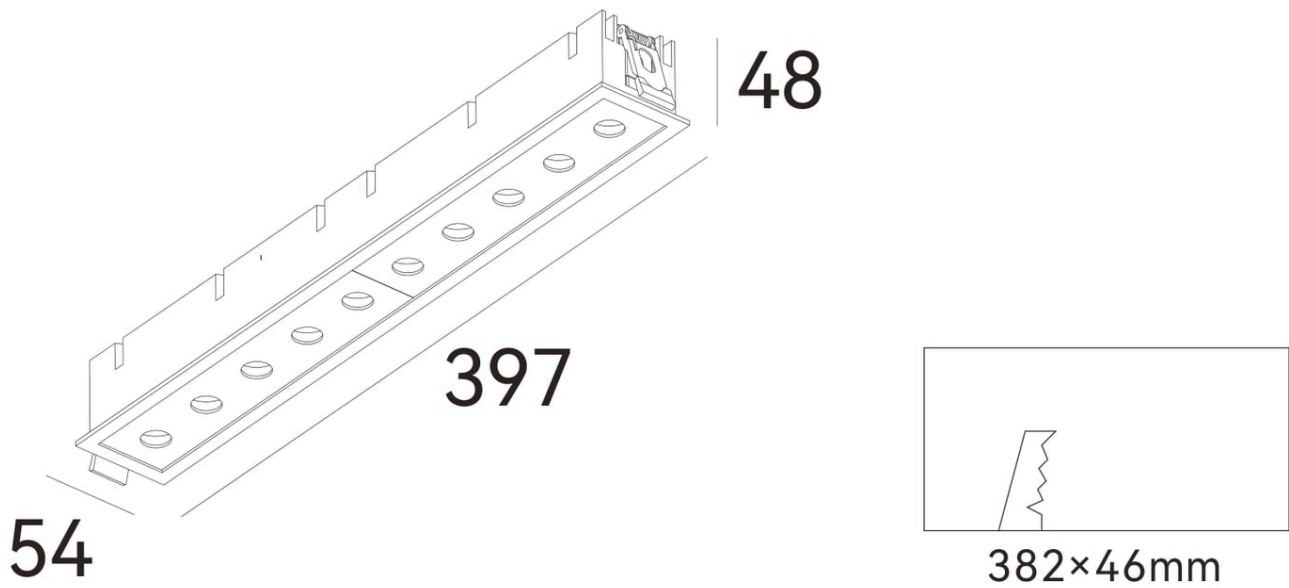


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0923	27 W	max 30 V	2160 lm	97 CRI	L397 x W54 x H48 mm	Ø382 mm	24° 36°	900 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0923, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0923, 27 W, 24° beam

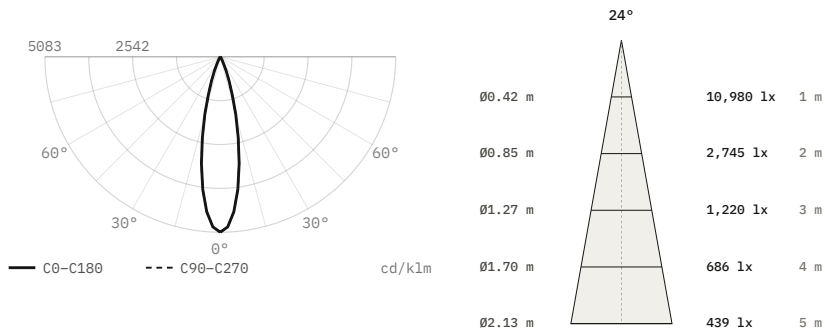

Luminous flux	2,160 lm
Efficacy	80 lm/W
Peak intensity	10,980 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	397 × 54 × 48 mm
Data	Calculated from catalogue data

DL0923, 27 W, 36° beam

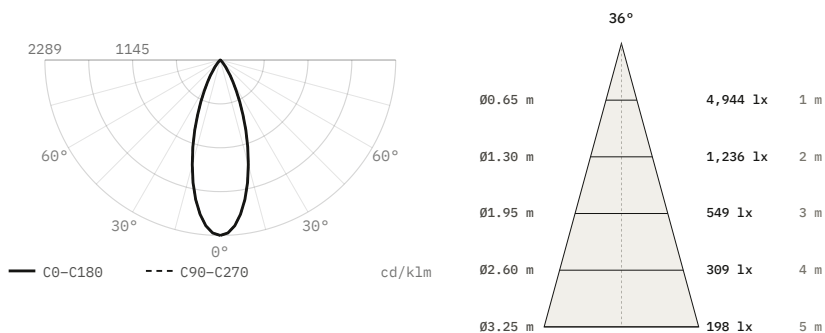

Luminous flux	2,160 lm
Efficacy	80 lm/W
Peak intensity	4,944 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	397 × 54 × 48 mm
Data	Calculated from catalogue data