

Linear

Bet DL1481

Linear luminaire



Linear luminaire. 13 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø221 mm
- LED source: Citizen

Power	Voltage	Luminous flux
13 W	max 36 V	1180 lm
Colour temperature	CRI	Beam angles
2700 K, 3000 K, 4000 K	97 CRI	24°, 36°
IP rating	Certifications	Mounting
IP20	CE	Recessed
Finishes		
Black		


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1481	13 W	max 36 V	1180 lm	97 CRI	L225 x W28 x H29 mm	Ø221 mm	24° 36°	350 mA


Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1481, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1481, 13 W, 24° beam

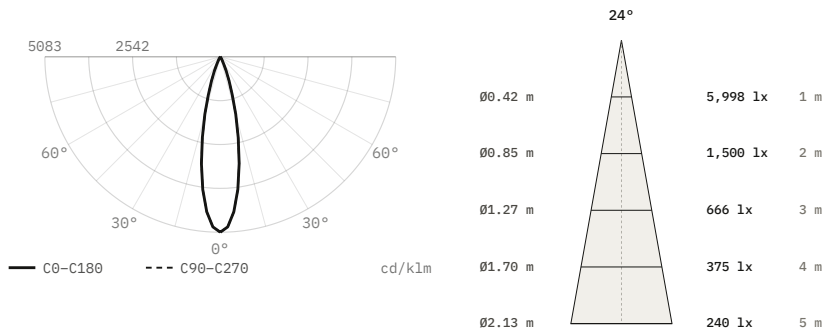

DL1481, 13 W, 36° beam

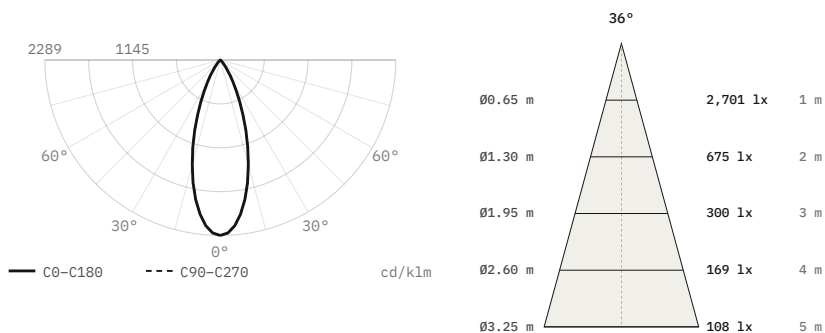

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.