

Linear

Bet DL1620

Linear luminaire



Linear luminaire. 13 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø228 mm
- LED source: Citizen

Power	Voltage	Luminous flux
13 W	max 37 V	1180 lm
Colour temperature	CRI	Beam angles
2700 K, 3000 K, 4000 K	97 CRI	24°, 36°
IP rating	Certifications	Mounting
IP20	CE	Recessed
Finishes		
White		


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1620	13 W	max 37 V	1180 lm	97 CRI	L234 x W37 x H29 mm	Ø228 mm	24° 36°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1620, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1620, 13 W, 24° beam

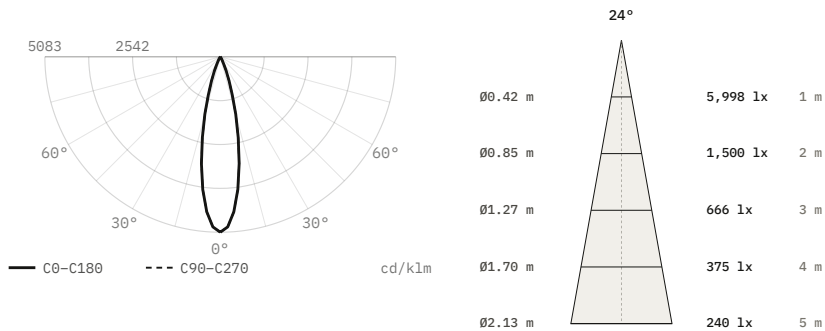

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	234 × 37 × 29 mm
Data	Calculated from catalogue data

DL1620, 13 W, 36° beam

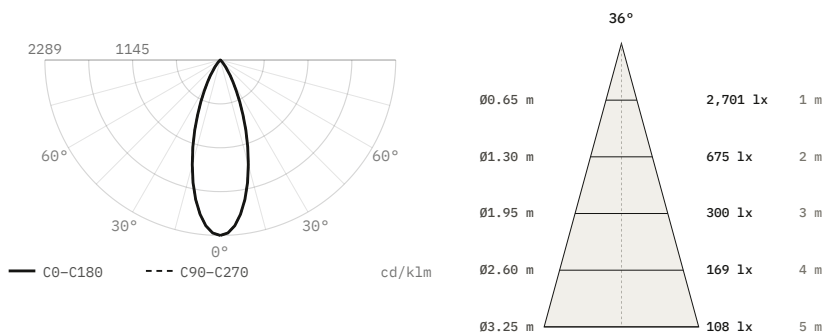

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	234 × 37 × 29 mm
Data	Calculated from catalogue data