

Linear

Bet DL1651

Linear luminaire




Linear luminaire. 20 W. 90° beam. 2700, 3000, 4000 K.
97 CRI.

- Ceiling cut-out Ø276 mm
- LED source: Citizen

Power 20 W	Voltage max 32 V	Luminous flux 1800 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 90°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

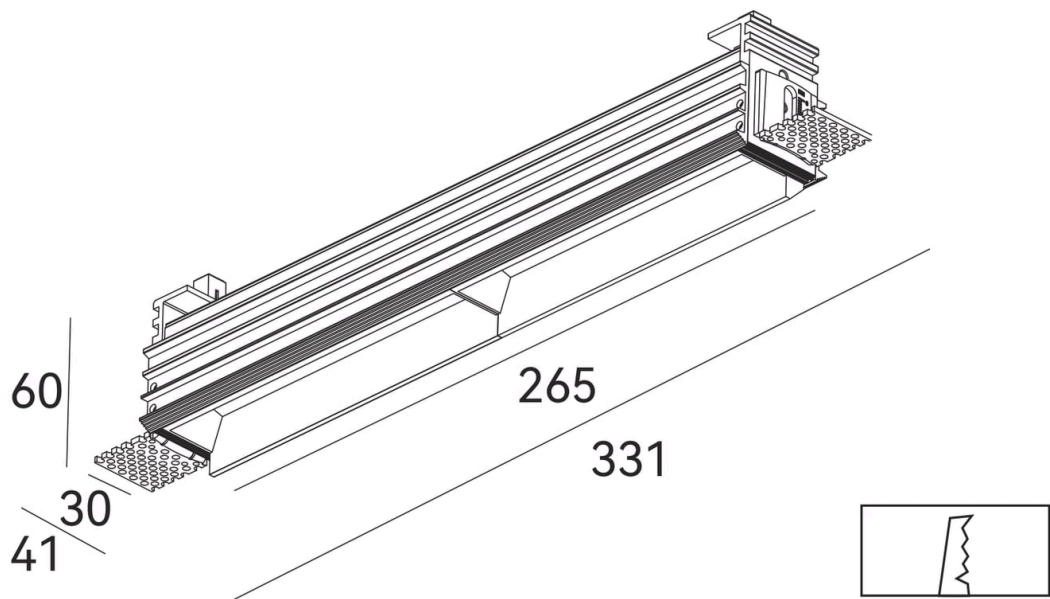


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1651	Wall washer	20 W	max 32 V	1800 lm	97 CRI	L331 x W41 x H60 mm	Ø276 mm	90°	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1651, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1651, 20 W, wall washer

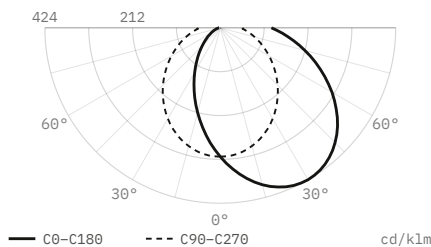

Luminous flux	1,800 lm
Efficacy	90 lm/W
Peak intensity	763 cd, 424 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	24.2 / 47.2 / 28.6 %
Size	331 × 41 × 60 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.