

Recessed

Bet DL1671

Recessed spotlight




Recessed spotlight. 9 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø63 mm
- LED source: Citizen

Power 9 W	Voltage max 27 V	Luminous flux 720 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

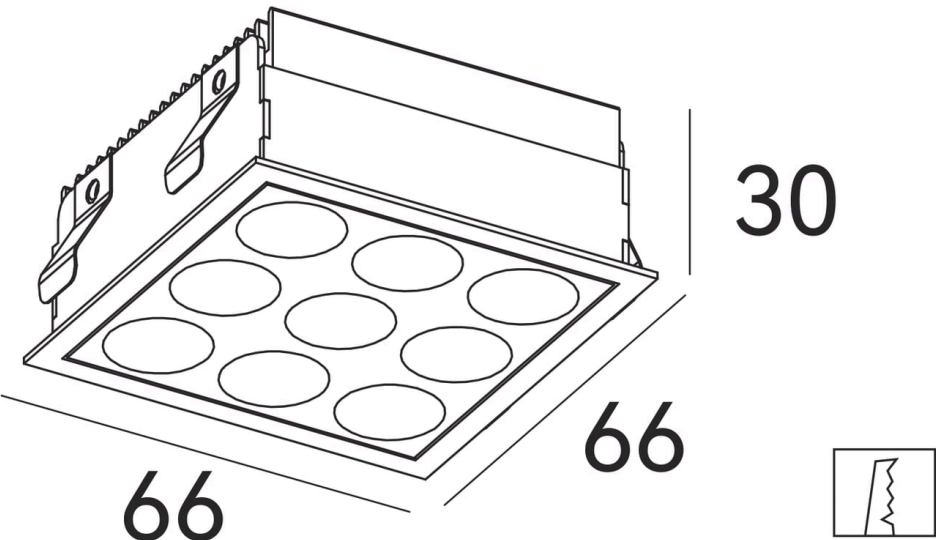

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1671	9 W	max 27 V	720 lm	97 CRI	66 × 66 × 30 mm	Ø63 mm	24° 36°	350 mA

Finishes



Black




White

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1671, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1671, 9 W, 24° beam

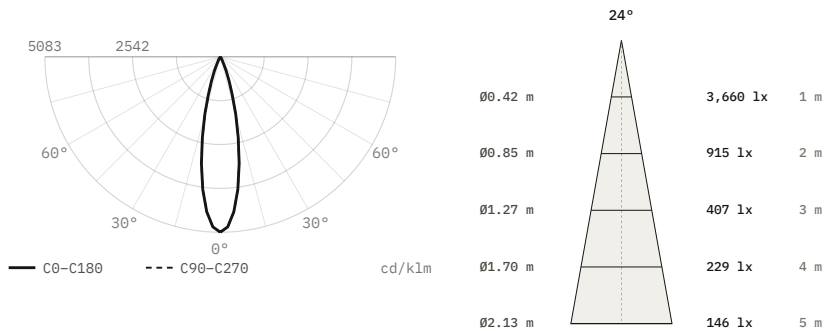

Luminous flux	720 lm
Efficacy	80 lm/W
Peak intensity	3,660 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	66 × 66 × 30 mm
Data	Calculated from catalogue data

DL1671, 9 W, 36° beam

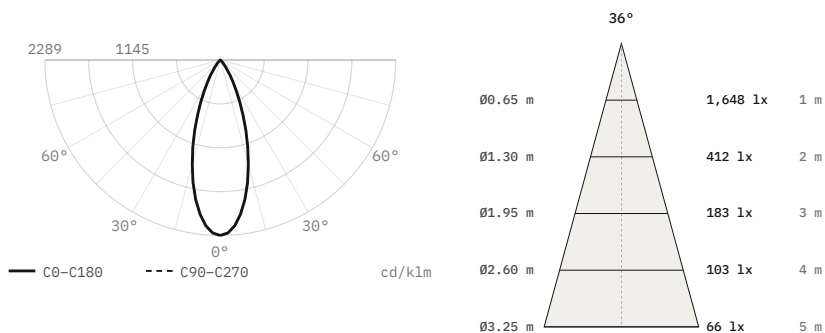

Luminous flux	720 lm
Efficacy	80 lm/W
Peak intensity	1,648 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	66 × 66 × 30 mm
Data	Calculated from catalogue data