

Recessed

Bet DL1720

Recessed spotlight




Recessed spotlight. 15 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø91 mm
- LED source: Citizen

Power 15 W	Voltage max 24 V	Luminous flux 1280 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

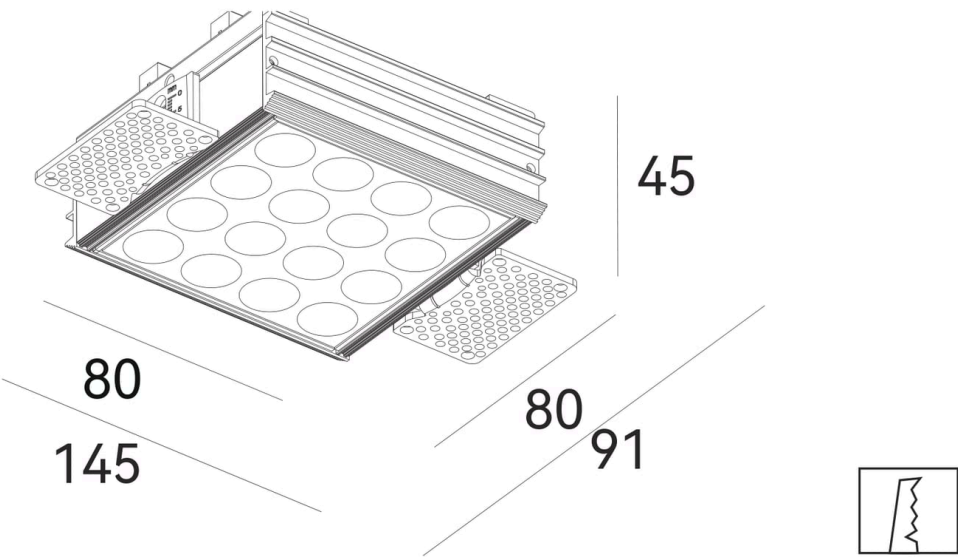


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1720	15 W	max 24 V	1280 lm	97 CRI	145 × 91 × 45 mm overall (module 80 × 80)	Ø91 mm	24° 36°	600 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1720, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1720, 15 W, 24° beam

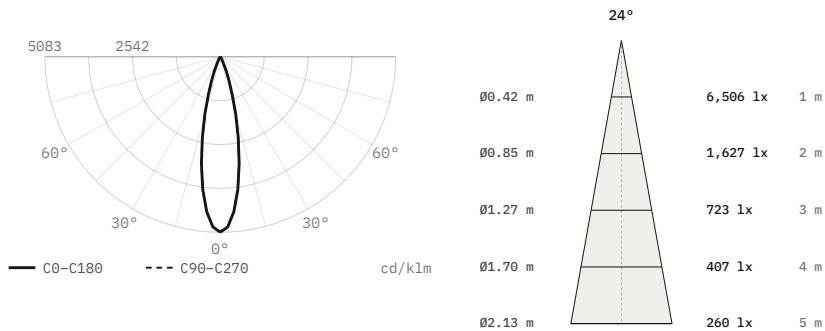

Luminous flux	1,280 lm
Efficacy	85 lm/W
Peak intensity	6,506 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	145 × 91 × 45 mm
Data	Calculated from catalogue data

DL1720, 15 W, 36° beam

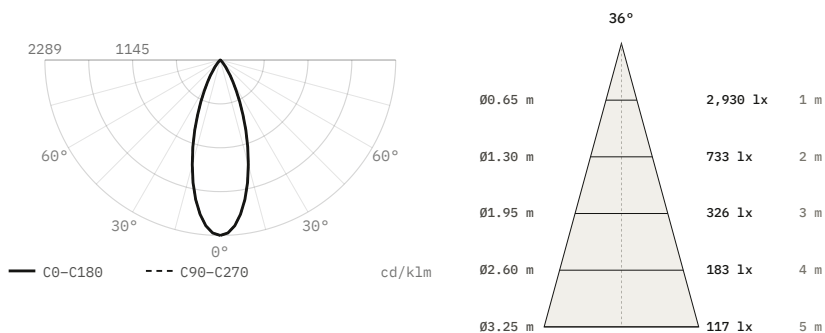

Luminous flux	1,280 lm
Efficacy	85 lm/W
Peak intensity	2,930 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	145 × 91 × 45 mm
Data	Calculated from catalogue data