

Recessed

Bet DL1932

Recessed spotlight




Recessed spotlight. 21 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø210 mm
- LED source: Citizen

Power 21 W	Voltage max 30 V	Luminous flux 1680 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

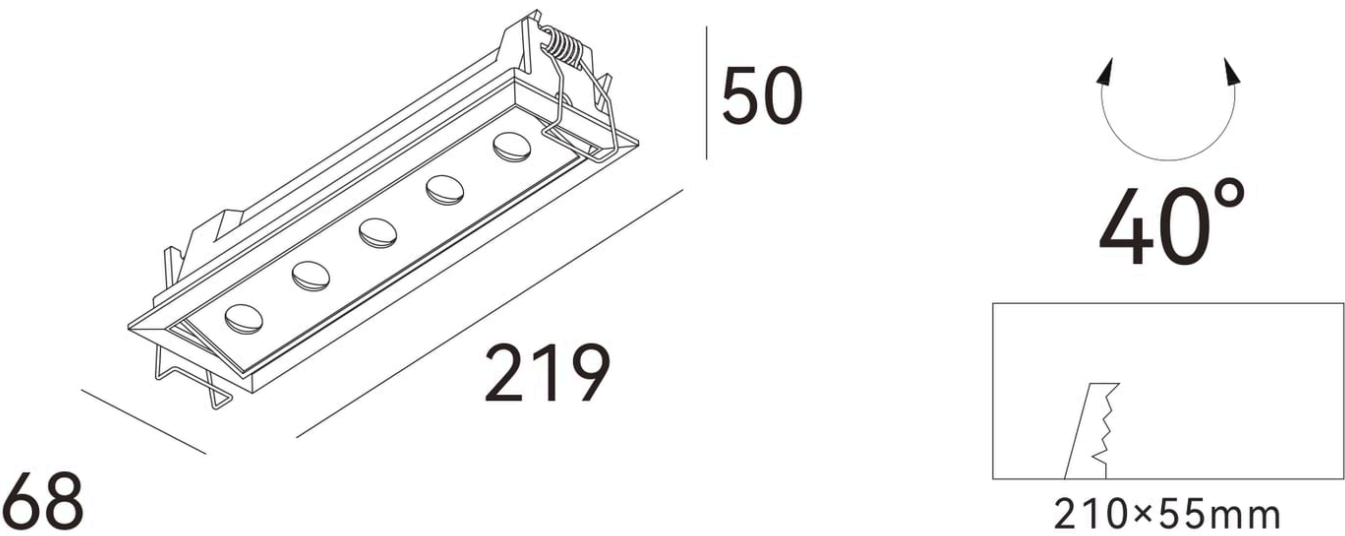


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1932	21 W	max 30 V	1680 lm	97 CRI	L219 x W68 x H50 mm	Ø210 mm	24° 36°	700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1932, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1932, 21 W, 24° beam

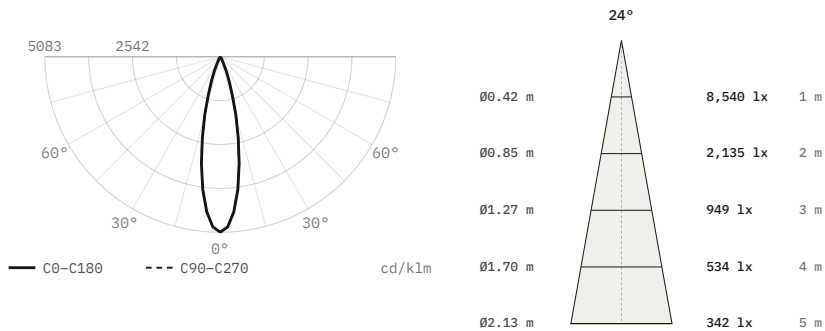

Luminous flux	1,680 lm
Efficacy	80 lm/W
Peak intensity	8,540 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	219 × 68 × 50 mm
Data	Calculated from catalogue data

DL1932, 21 W, 36° beam

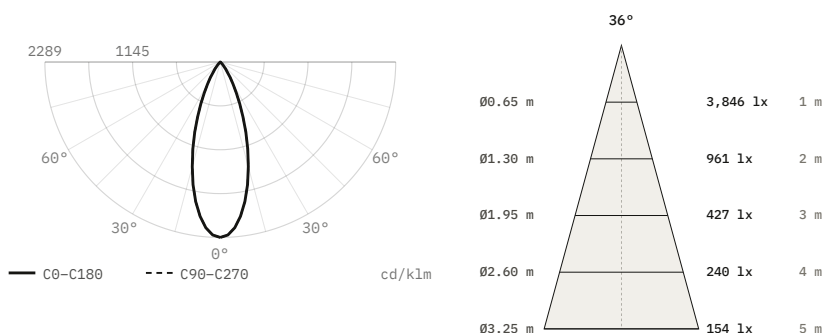

Luminous flux	1,680 lm
Efficacy	80 lm/W
Peak intensity	3,846 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	219 × 68 × 50 mm
Data	Calculated from catalogue data