

Recessed

Bet DL1957

Recessed spotlight




Recessed spotlight. 10 W. Three beam angles, 15° to 36°. 3000, 4000, 5000 K. IP65. 97 CRI.

- Ceiling cut-out Ø155 mm
- LED source: Citizen

Power 10 W	Voltage 220–240 V AC	Luminous flux 900 lm
Colour temperature 3000 K, 4000 K, 5000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°
IP rating IP65	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

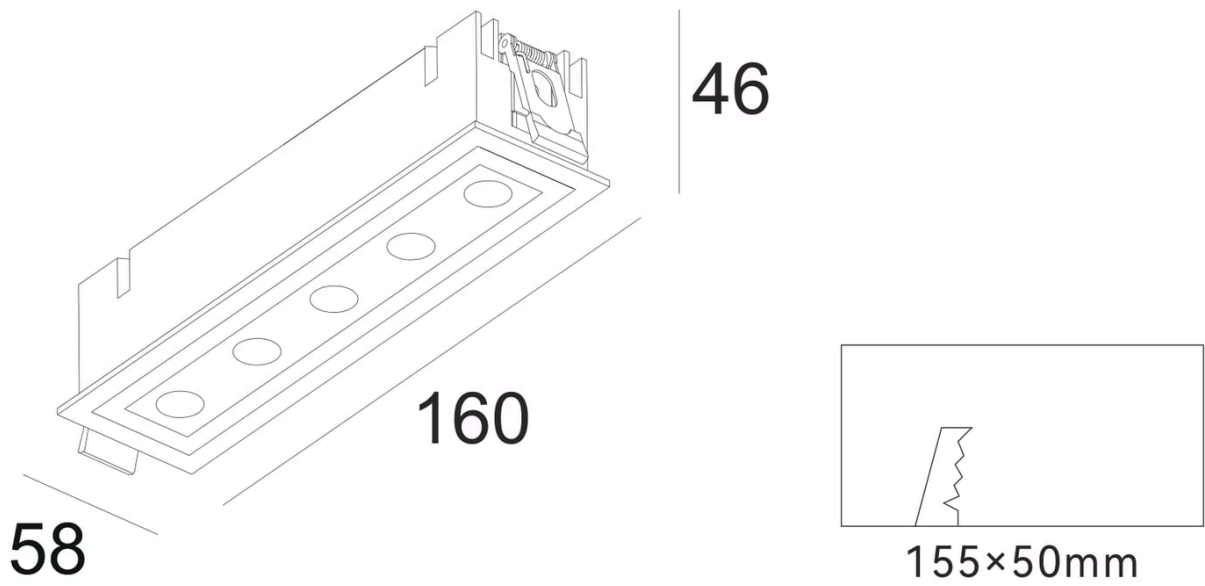


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam
DL1957	10 W	220–240 V AC	900 lm	97 CRI	L160 x W58 x H46 mm	Ø155 mm	15° 24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1957, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1957, 10 W, 15° beam

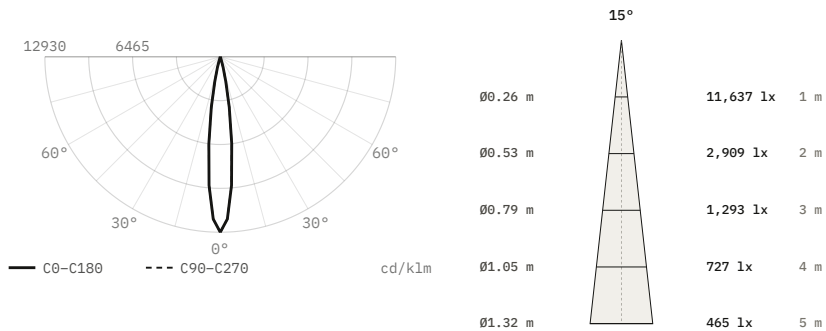


Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	11,637 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	160 × 58 × 46 mm
Data	Calculated from catalogue data

DL1957, 10 W, 24° beam

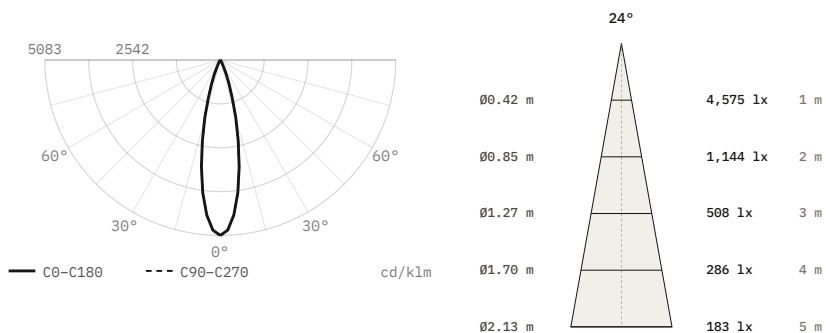

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	4,575 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	160 × 58 × 46 mm
Data	Calculated from catalogue data

DL1957, 10 W, 36° beam

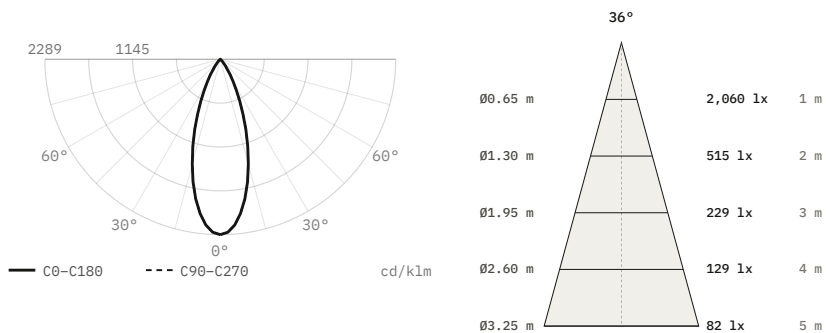

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	2,060 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	160 × 58 × 46 mm
Data	Calculated from catalogue data

