

Recessed

Bet DL1971

Recessed spotlight



Recessed spotlight. 7, 10, 13 or 20 W. 60° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power
7 W, 10 W, 13 W, 20 W

Voltage
max 18 V, max 30 V, max 27 V, max 36 V

Luminous flux
630–1800 lm

Colour temperature
2700 K, 3000 K, 4000 K

CRI
97 CRI

Beam angles
60°


IP rating
IP20

Certifications
CE

Mounting
Recessed

Finishes
Black

Dimensions

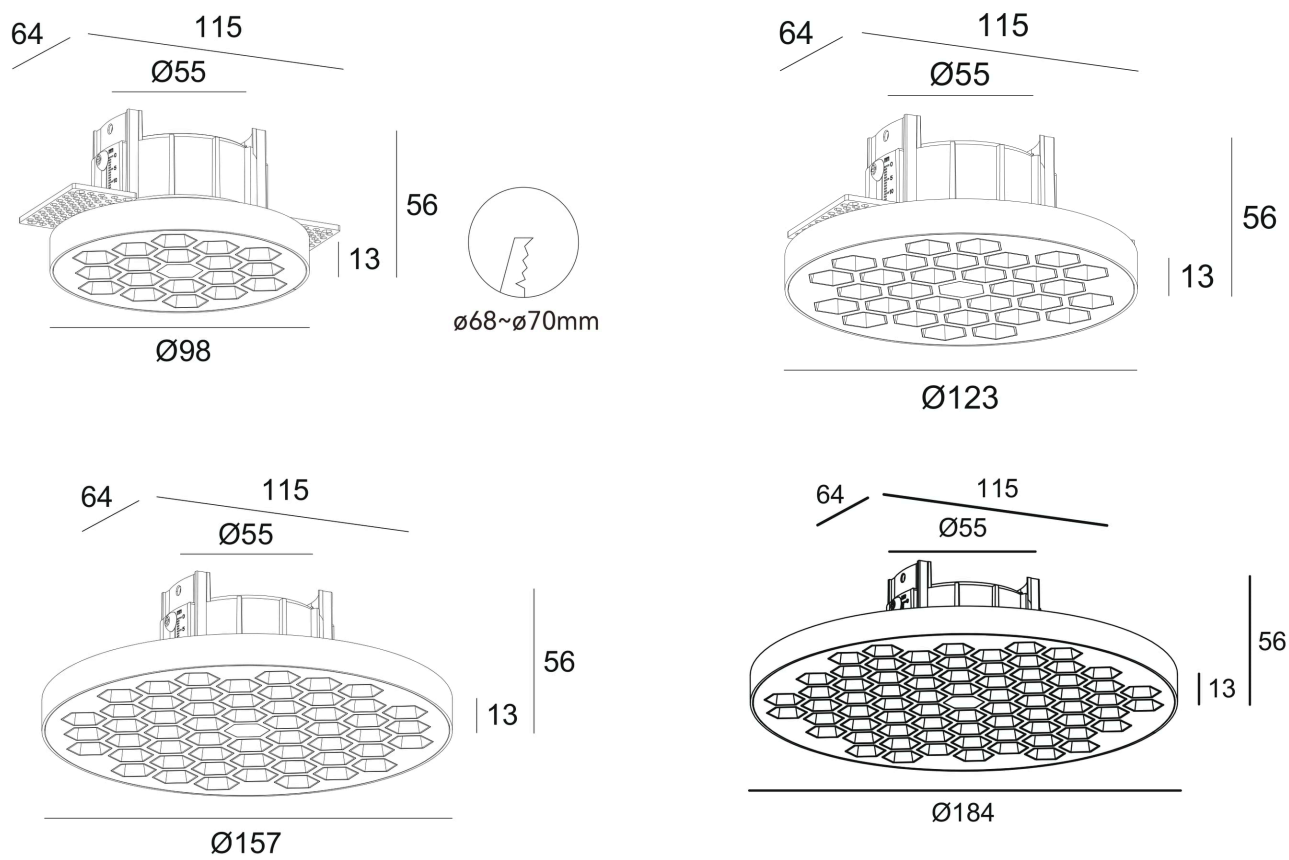


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1971	7 W	max 18 V	630 lm	97 CRI	Ø98 x H56 mm (face height 13 mm)	Ø68 mm	60°	350 mA
DL1972	10 W	max 30 V	960 lm	97 CRI	Ø123 x H56 mm (face height 13 mm)	Ø68 mm	60°	350 mA
DL1973	13 W	max 27 V	1200 lm	97 CRI	Ø157 x H56 mm (face height 13 mm)	Ø68 mm	60°	500 mA
DL1974	20 W	max 36 V	1800 lm	97 CRI	Ø184 x H56 mm (face height 13 mm)	Ø68 mm	60°	500 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1974, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1974, 20 W, 60° beam

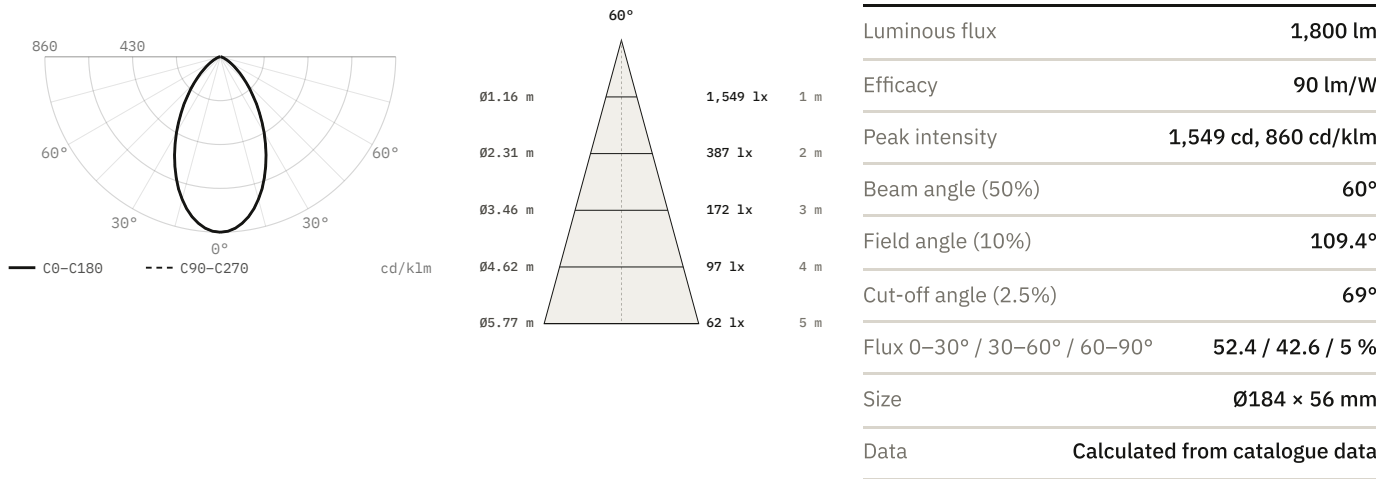

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.