

Recessed

Bet DL1992

Recessed spotlight




Recessed spotlight.

- Ceiling cut-out Ø85 mm
- LED source: Citizen

Voltage max 36 V	Luminous flux 2*630 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 34°, 48°	IP rating IP20
Certifications CE	Mounting Recessed	Finishes Black

Dimensions

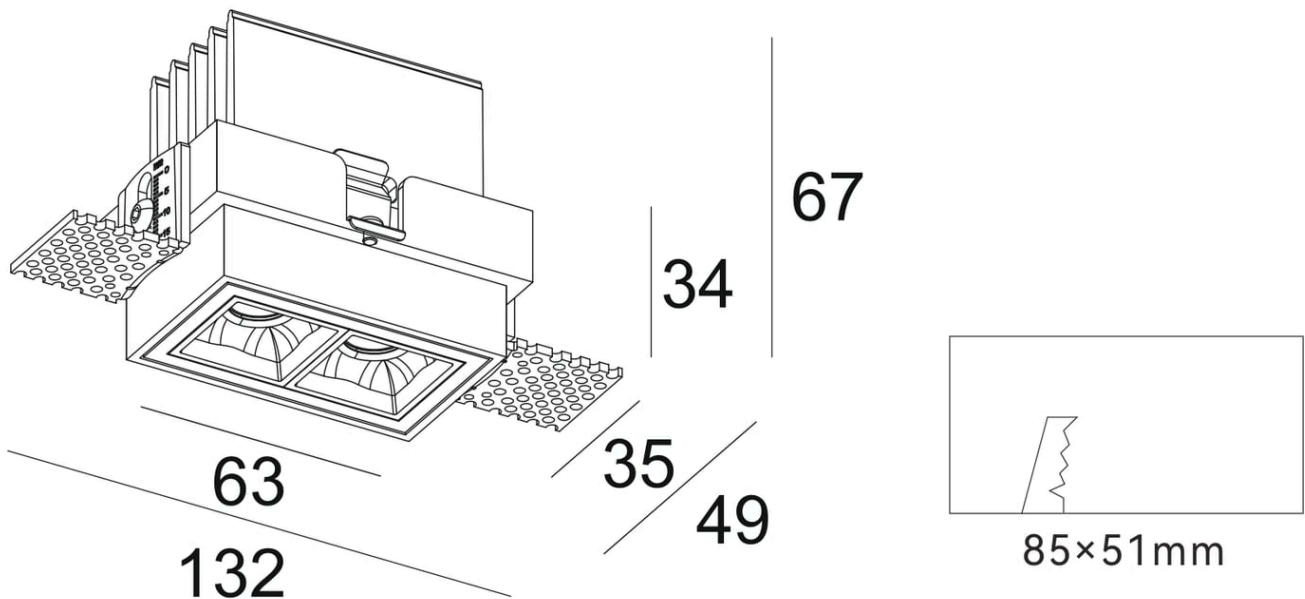


Models

Code	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1992	max 36 V	2*630 lm	97 CRI	L132 x W49 x H67 mm	Ø85 mm	34° 48°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1992, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1992, 34° beam

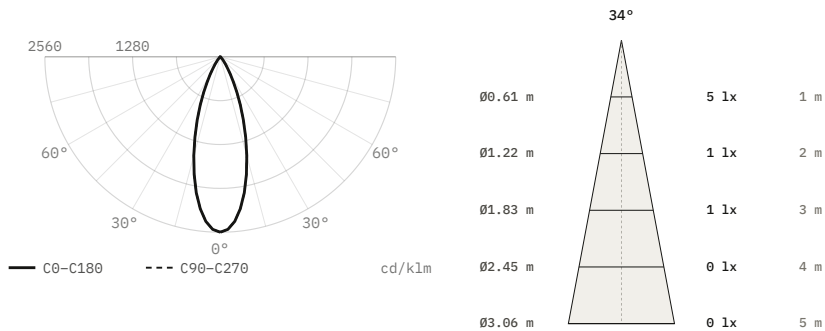

Luminous flux	2 lm
Peak intensity	5 cd, 2,560 cd/klm
Beam angle (50%)	34°
Field angle (10%)	62°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	89 / 11 / 0 %
Size	132 × 49 × 67 mm
Data	Calculated from catalogue data

DL1992, 48° beam

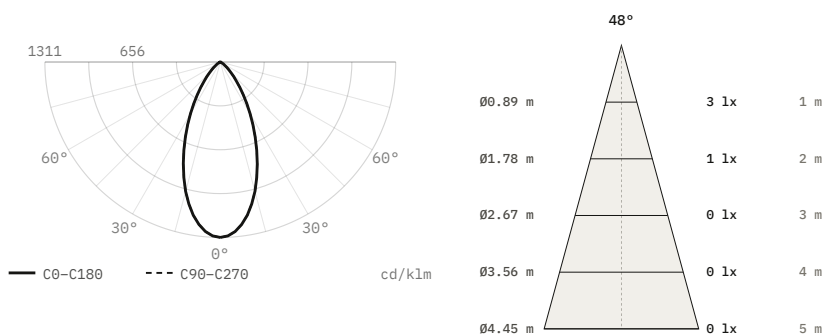

Luminous flux	2 lm
Peak intensity	3 cd, 1,311 cd/klm
Beam angle (50%)	48°
Field angle (10%)	87.5°
Cut-off angle (2.5%)	55°
Flux 0–30° / 30–60° / 60–90°	67.7 / 31.2 / 1.1 %
Size	132 × 49 × 67 mm
Data	Calculated from catalogue data