

Outdoor

# Bollard SL0075

Outdoor luminaire




Outdoor luminaire. 3 W. 36° beam. 2700, 3000, 4000 K. IP65. 97 CRI.

— LED source: Citizen

|                                              |                      |                         |
|----------------------------------------------|----------------------|-------------------------|
| Power<br>3 W                                 | Voltage<br>24 V DC   | Luminous flux<br>270 lm |
| Colour temperature<br>2700 K, 3000 K, 4000 K | CRI<br>97 CRI        | Beam angles<br>36°      |
| IP rating<br>IP65                            | Certifications<br>CE | Mounting<br>Floor, Wall |
| Finishes<br>Black                            |                      |                         |

Dimensions

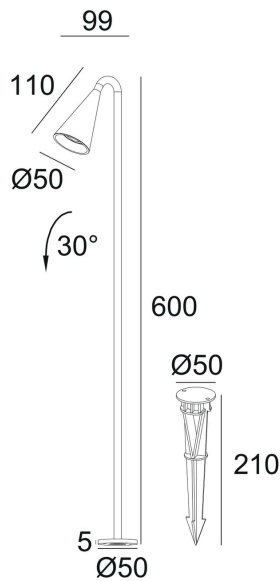

Models

| Code   | Version     | Power | Voltage    | Flux   | CRI    | Size                                                                | Beam |
|--------|-------------|-------|------------|--------|--------|---------------------------------------------------------------------|------|
| SL0075 | H<br>600 mm | 3 W   | 24 V<br>DC | 270 lm | 97 CRI | H600 mm, projection 99 mm, head Ø50 × 110 mm, base plate Ø50 × 5 mm | 36°  |
| SL0076 | H<br>800 mm | 3 W   | 24 V<br>DC | 270 lm | 97 CRI | H800 mm, projection 90 mm, head Ø50 × 110 mm, base plate Ø50 × 5 mm | 36°  |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0075, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## SL0075, 3 W, 36° beam

