

Outdoor

# Bollard SL0165

Outdoor luminaire




Outdoor luminaire. 7 W. 2700, 3000, 4000 K. IP65.  
97 CRI.

— LED source: Citizen

|                                              |                         |                         |
|----------------------------------------------|-------------------------|-------------------------|
| Power<br>7 W                                 | Voltage<br>24 V DC      | Luminous flux<br>560 lm |
| Colour temperature<br>2700 K, 3000 K, 4000 K | CRI<br>97 CRI           | IP rating<br>IP65       |
| Certifications<br>CE                         | Mounting<br>Floor, Wall | Finishes<br>Black       |

Dimensions

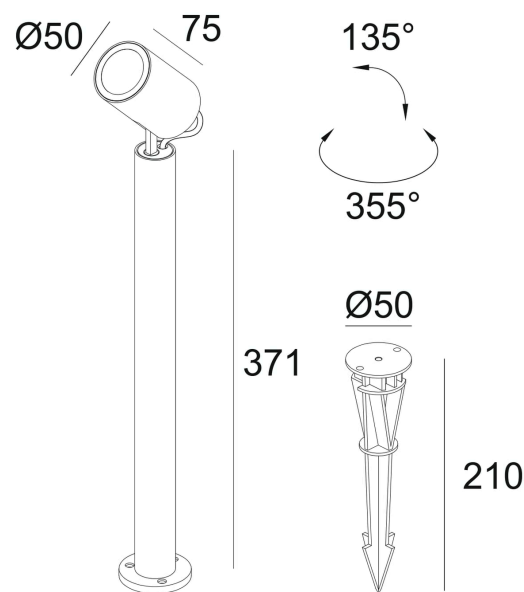

Models

| Code   | Version  | Power | Voltage | Flux   | CRI    | Size                      |
|--------|----------|-------|---------|--------|--------|---------------------------|
| SL0165 | H 371 mm | 7 W   | 24 V DC | 560 lm | 97 CRI | H371 mm, head Ø50 × 75 mm |
| SL0166 | H 571 mm | 7 W   | 24 V DC | 560 lm | 97 CRI | H571 mm, head Ø50 × 75 mm |
| SL0167 | H 761 mm | 7 W   | 24 V DC | 560 lm | 97 CRI | H761 mm, head Ø50 × 75 mm |
| SL0168 | H 961 mm | 7 W   | 24 V DC | 560 lm | 97 CRI | H961 mm, head Ø50 × 75 mm |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0165, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## SL0165, 7 W, wide distribution

