

Outdoor

Bollard SL0094

Outdoor luminaire



Outdoor luminaire. 7 W. 2700, 3000, 4000 K. IP65.
97 CRI.

— LED source: Citizen

Power 7 W	Voltage 24 V DC	Luminous flux 560 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP65
Certifications CE	Mounting Floor, Wall	Finishes Black


Models

Code	Power	Voltage	Flux	CRI	Size
SL0094	7 W	24 V DC	560 lm	97 CRI	Ø120 × 325 mm (overall incl. ground spike)

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0094, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0094, 7 W, wide distribution

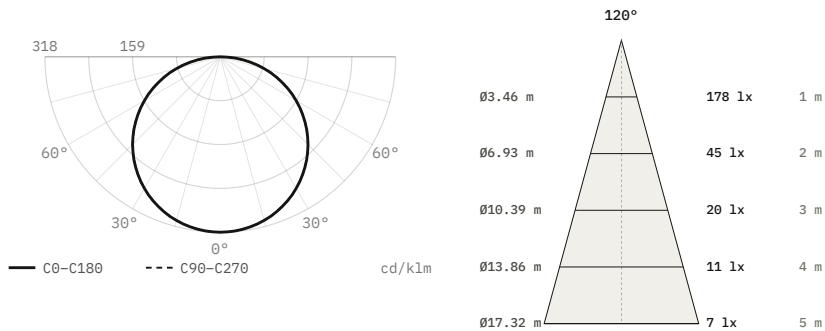

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	178 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø120 × 325 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.