

Linear

C3-1118F

Linear luminaire




Linear luminaire. 30 W. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 30 W	Luminous flux 2800–3000 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	IP rating IP20	Certifications CE, RoHS, EMC, LVD
Mounting Surface	Control DALI, 0-10V, Triac, Casambi	Finishes White, Black, Grey

Dimensions

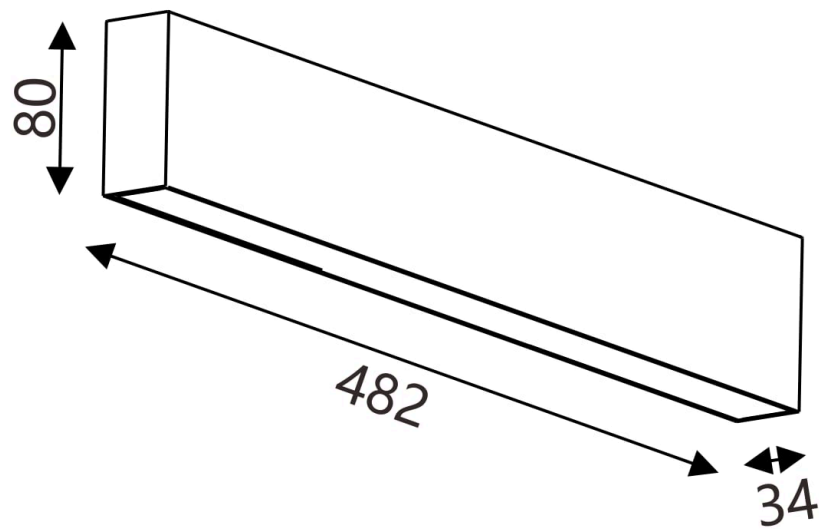

Models

Code	Version	Power	Flux	CRI	Size
C3-1118F	Flood	30 W	2800–3000 lm	97 CRI	L482 x W34 x H80 mm

Finishes



Black



White




Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for C3-1118F, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

C3-1118F, 30 W, wide distribution

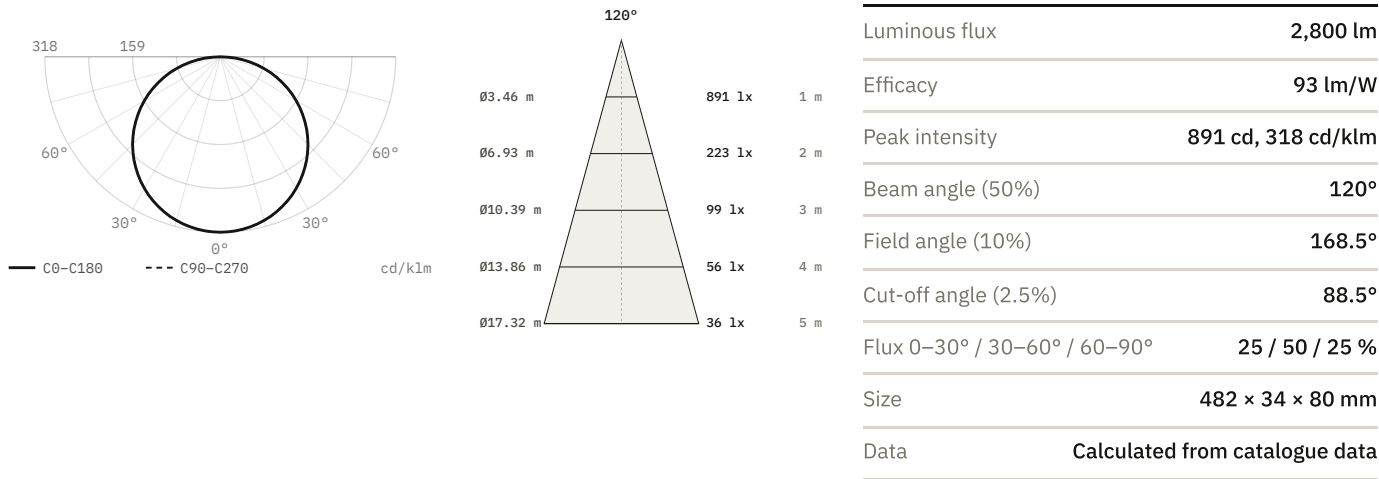

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.