

Linear

C3-1118W

Linear luminaire




Linear luminaire. 30 W. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 30 W	Luminous flux 2600–2700 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	IP rating IP20	Certifications CE, RoHS, EMC, LVD
Mounting Surface	Control DALI, 0-10V, Triac, Casambi	Finishes White, Black, Grey

Dimensions

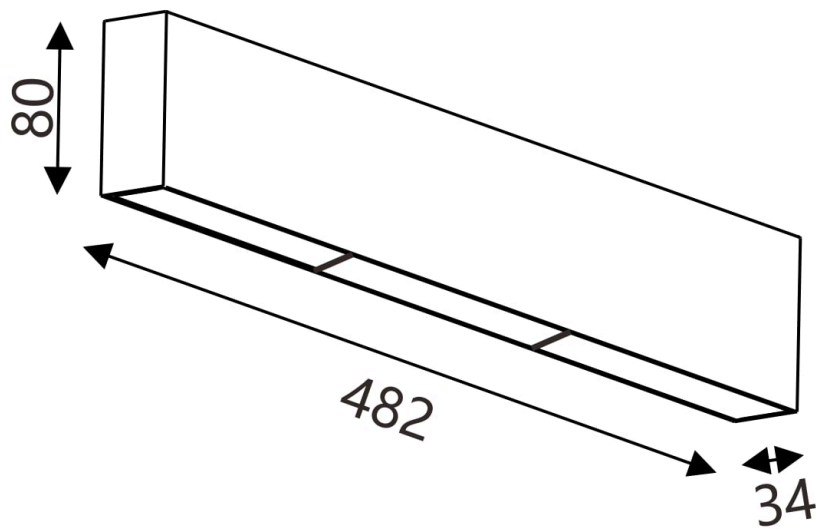

Models

Code	Version	Power	Flux	CRI	Size
C3-1118W	Wall washer	30 W	2600–2700 lm	97 CRI	L482 x W34 x H80 mm

Finishes



Black



White




Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for C3-1118W, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

C3-1118W, 30 W, wall washer

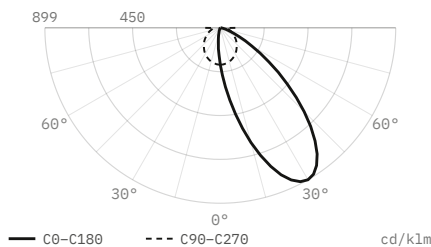

Luminous flux	2,600 lm
Efficacy	87 lm/W
Peak intensity	2,337 cd, 899 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.9 / 60.4 / 15.7 %
Size	482 × 34 × 80 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.