

Surface

C3-4314

Surface luminaire




Surface luminaire. 20 W. 15° or 60° beam. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 20 W	Luminous flux 2000–2100 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 60°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Surface	Control DALI, 0-10V, Triac, Casambi

Finishes
White, Black, Grey

Dimensions

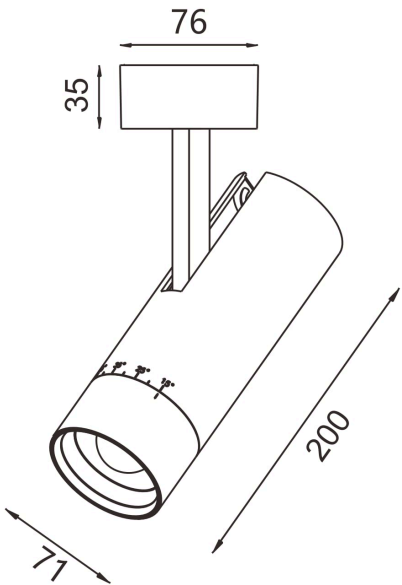


Models

Code	Power	Flux	CRI	Size	Beam
C3-4314	20 W	2000–2100 lm	97 CRI	71 × 200 mm	15° 60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


20 W

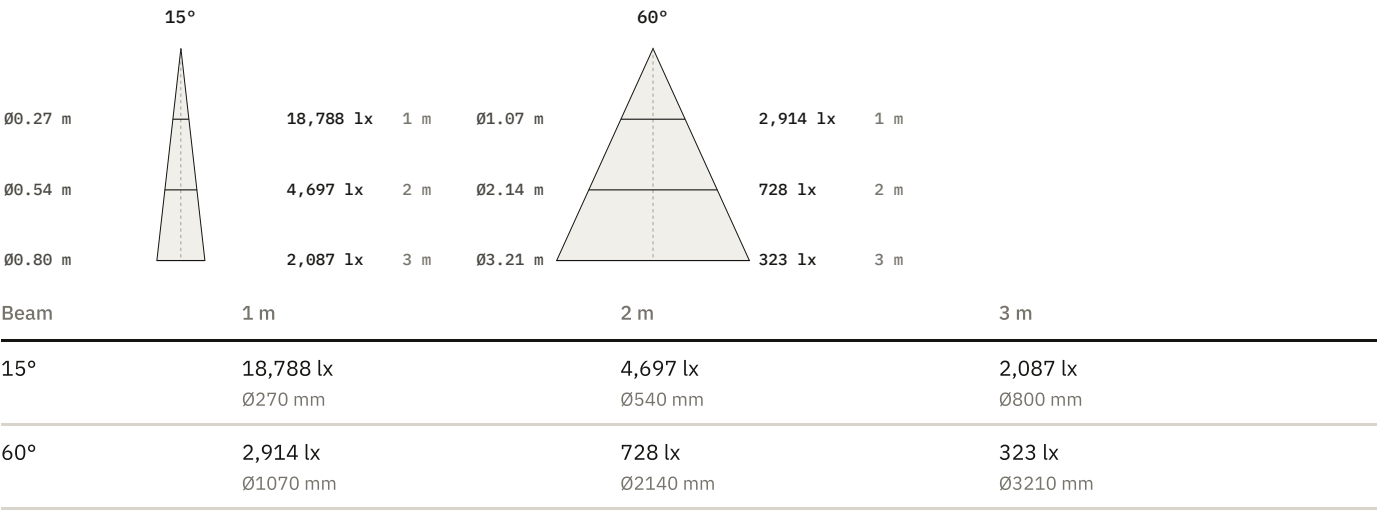


Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for C3-4314, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

C3-4314, 20 W, 15° beam

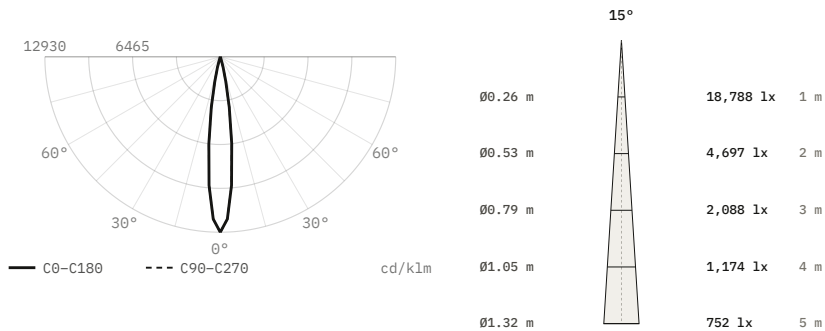

C3-4314, 20 W, 60° beam

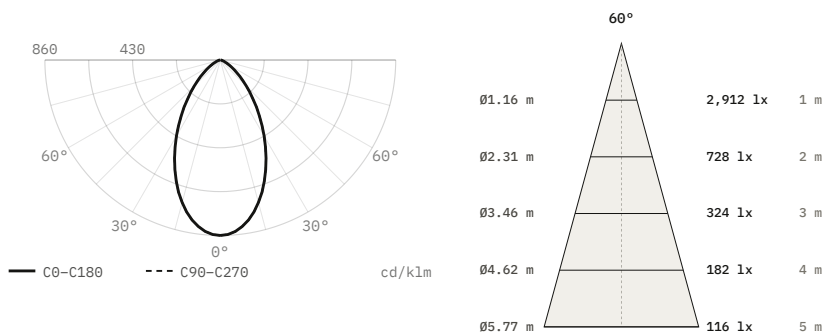

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.