Chandel-Track 13 mm system

D30AR

Chandel-Track spotlight



Spotlight for the Chandel-Track 48 V track system. 4 W. 105° beam. 2700, 3000, 4000, 5000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Colour temperature
4 W	48 V DC	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**Mounting**
97 CRI	105°	Magnetic track

Finishes

Black, Nickel, Gold

Dimensions

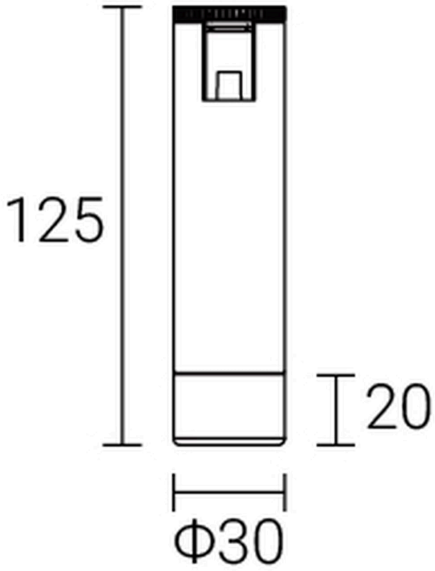

Models

Code	Power	Voltage	CRI	Size	Beam
CT13-D30AR	4 W	48 V DC	97 CRI	Ø30 × 125 mm, diffuser 20 mm	105°


Finishes




Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CT13-D30AR, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CT13-D30AR, 4 W, 105° beam

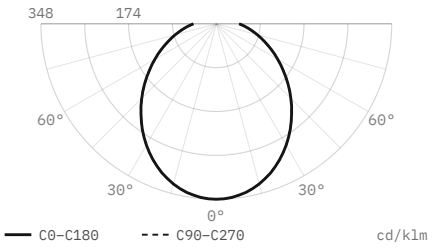

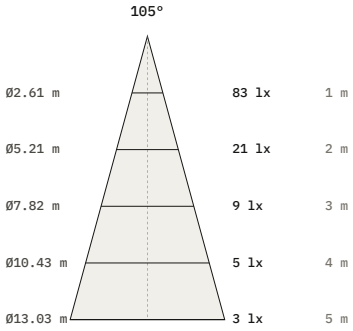

Luminous flux	240 lm
Efficacy	60 lm/W
Peak intensity	83 cd, 348 cd/klm
Beam angle (50%)	105°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	26.2 / 46.7 / 27.1 %
Size	Ø30 × 125 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.