Chandel-Track 13 mm system

LB10

Chandel-Track linear luminaire

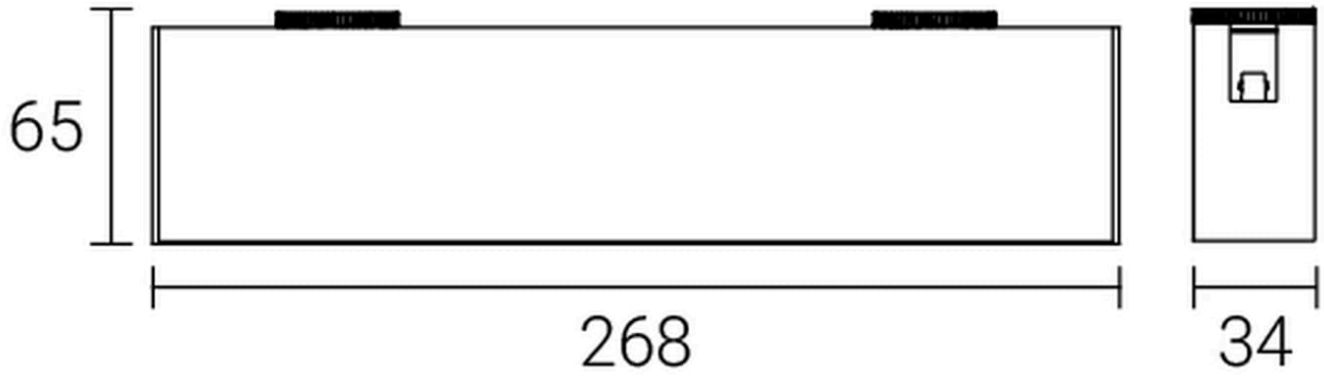


Linear luminaire for the Chandel-Track 48 V track system. 20 W. 30° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
20 W	**48 V DC**	**2700 K, 3000 K, 4000 K, 5000 K**
CRI	Beam angles	Mounting
97 CRI	**30°**	**Magnetic track**
Finishes		
Black, Nickel, Gold		

Dimensions



Models

Code	Power	Voltage	CRI	Size	Beam
CT13-LB10	20 W	48 V DC	97 CRI	268 × 34 × 65 mm	30°

Finishes


Gold

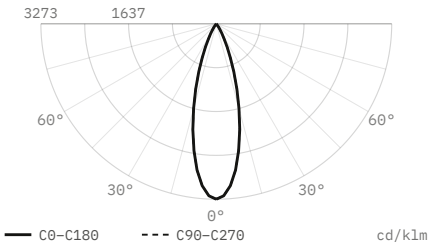

Nickel

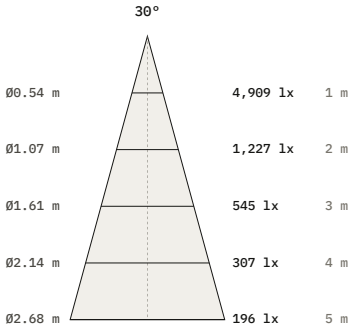

Black

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CT13-LB10, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CT13-LB10, 20 W, 30° beam





Luminous flux	**1,500 lm**
Efficacy	**75 lm/W**
Peak intensity	**4,909 cd, 3,273 cd/klm**
Beam angle (50%)	**30°**
Field angle (10%)	**54.7°**
Cut-off angle (2.5%)	**34.5°**
Flux 0–30° / 30–60° / 60–90°	**94 / 6 / 0 %**
Size	**268 × 34 × 65 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.