

Magnetic 23 mm system

Zoom Spotlight CX-8129D

23 mm spotlight




Spotlight for the 23 mm magnetic track. 12, 20 or 30 W.
2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power	Voltage	Luminous flux
12 W, 20 W, 30 W	48 V	2 × 540 lm, 2 × 900 lm, 2 × 1350 lm
Colour temperature	CRI	IP rating
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	Mounting	Control
CE, RoHS	Magnetic track	DALI, 0-10V, Bluetooth, Casambi
Finishes		
White, Black, Grey		

Dimensions

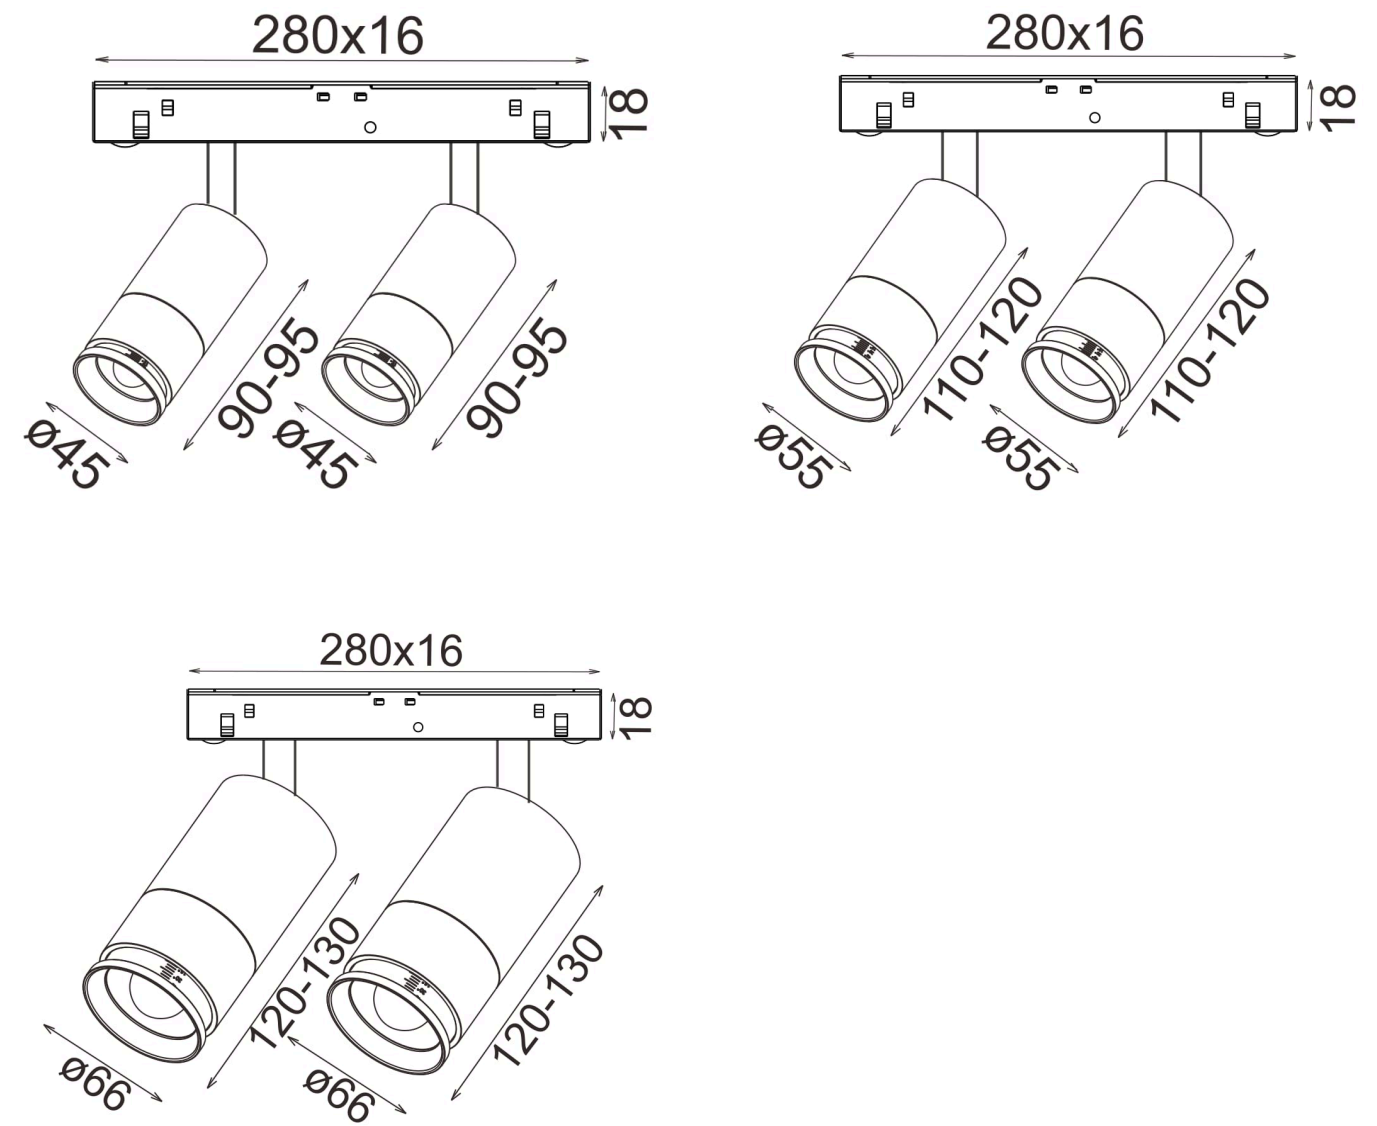

Models

Code	Version	Power	Voltage	Flux	CRI	Size
CX-8129D	Short arm, 15-45°	12 W	48 V	2 × 540 lm	97 CRI	$\varnothing 45 \times 90-95$ mm per head
CX-9129D	Long arm, 15-45°	12 W	48 V	2 × 540 lm	97 CRI	$\varnothing 45 \times 90-95$ mm per head
CX-8130D	Short arm, 15-60°	20 W	48 V	2 × 900 lm	97 CRI	$\varnothing 55 \times 110-120$ mm per head
CX-9130D	Long arm, 15-60°	20 W	48 V	2 × 900 lm	97 CRI	$\varnothing 55 \times 110-120$ mm per head
CX-8131D	Short arm, 15-50°	30 W	48 V	2 × 1350 lm	97 CRI	$\varnothing 66 \times 120-130$ mm per head
CX-9131D	Long arm, 15-50°	30 W	48 V	2 × 1350 lm	97 CRI	$\varnothing 66 \times 120-130$ mm per head

Finishes



Black



White




Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-8131D, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-8131D, 30 W, wide distribution

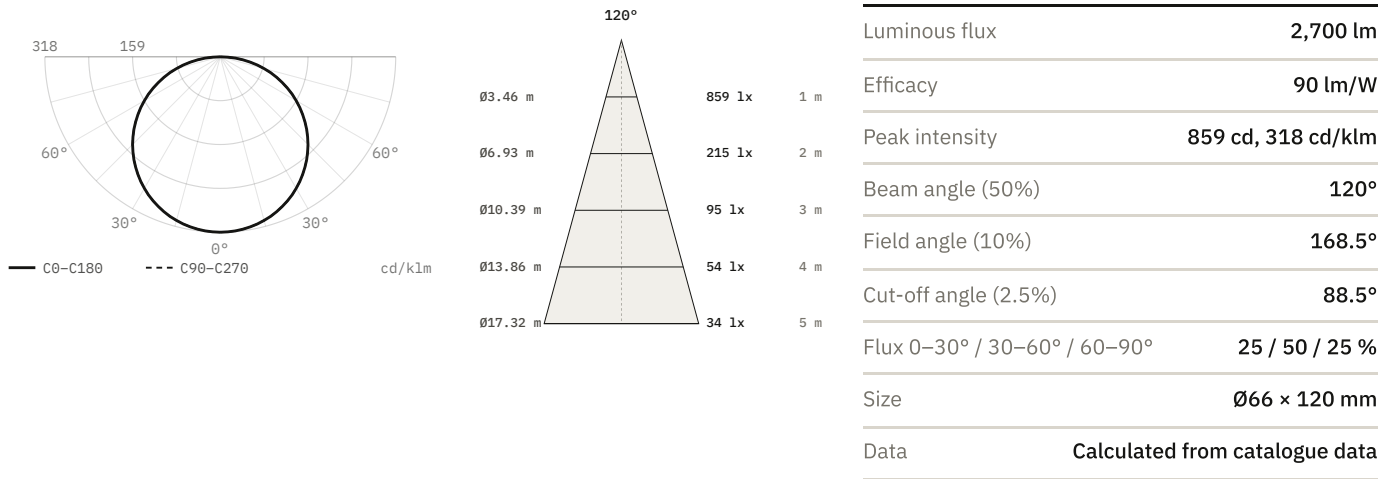

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.