

Magnetic 23 mm system

Spotlight CX-8146

23 mm spotlight




Spotlight for the 23 mm magnetic track. 10, 15 or 20 W.
2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power	Voltage	Luminous flux
10 W, 15 W, 20 W	48 V	1100 lm, 1350 lm, 1800 lm
Colour temperature	CRI	IP rating
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	Mounting	Control
CE, RoHS	Magnetic track	DALI, 0-10V, Bluetooth, Casambi
Finishes		
White, Black, Grey		

Dimensions

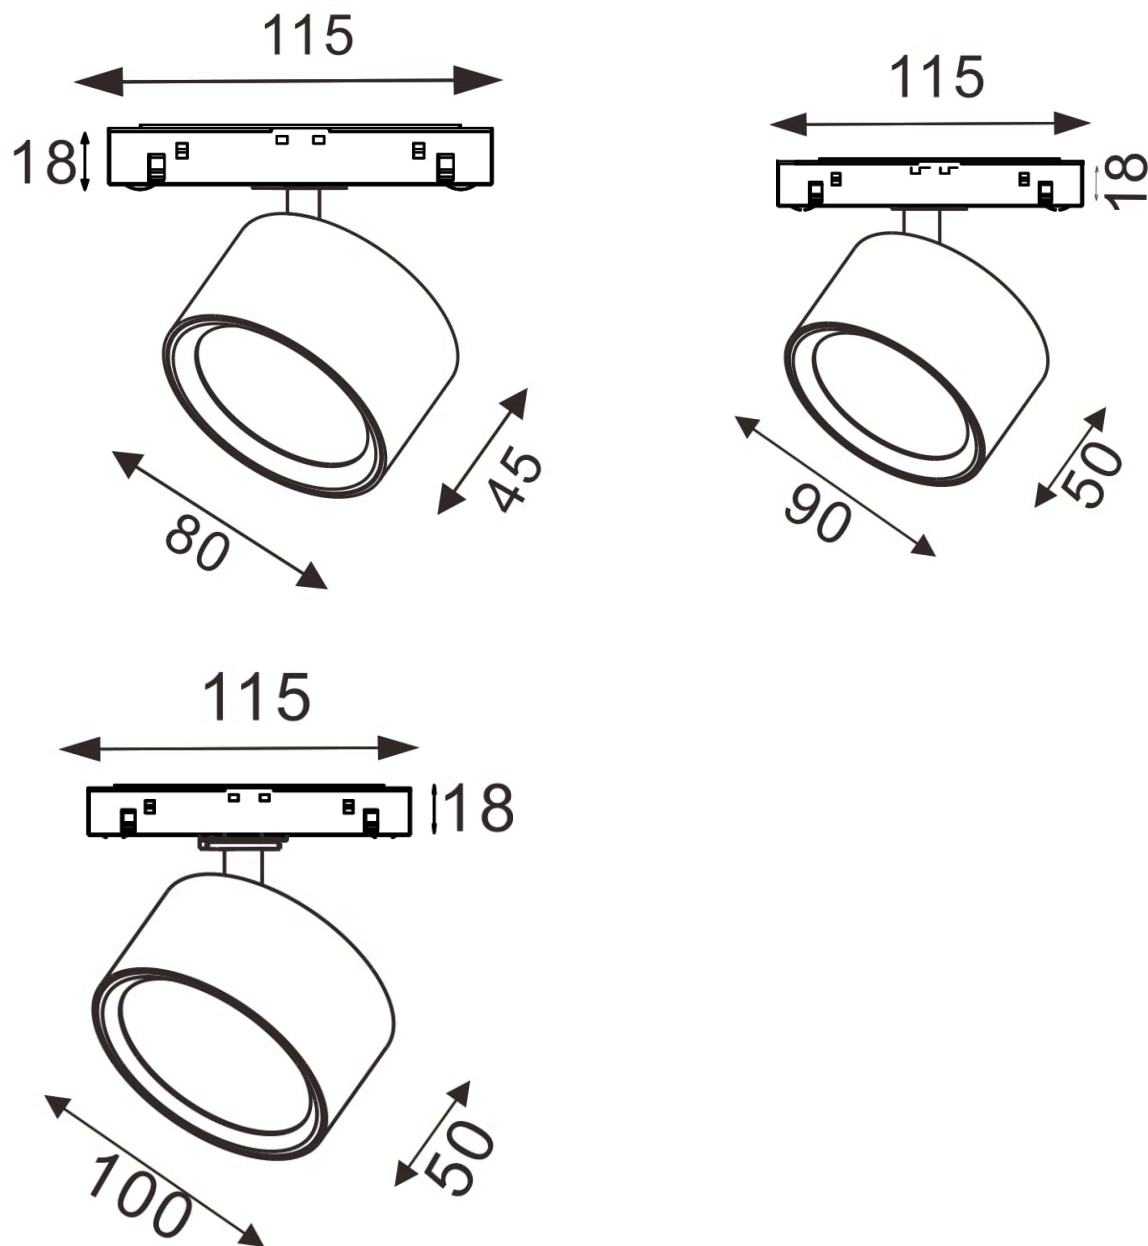

Models

Code	Version	Power	Voltage	Flux	CRI	Size
CX-8146	Short arm, floodlight	10 W	48 V	1100 lm	97 CRI	80 × 45 mm
CX-9146	Long arm, floodlight	10 W	48 V	1100 lm	97 CRI	80 × 45 mm
CX-8147	Short arm, floodlight	15 W	48 V	1350 lm	97 CRI	90 × 50 mm
CX-9147	Long arm, floodlight	15 W	48 V	1350 lm	97 CRI	90 × 50 mm
CX-8148	Short arm, floodlight	20 W	48 V	1800 lm	97 CRI	100 × 50 mm

Code	Version	Power	Voltage	Flux	CRI	Size
CX-9148	Long arm, floodlight	20 W	48 V	1800 lm	97 CRI	100 × 50 mm

Finishes



Black



Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-8148, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-8148, 20 W, wide distribution

