

Magnetic 23 mm system

CX-9236

23 mm linear luminaire




Linear luminaire for the 23 mm magnetic track. 15, 20, 30 or 40 W. 100° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power	Voltage	Luminous flux
15 W, 20 W, 30 W, 40 W	48 V	1350–3600 lm
Colour temperature	CRI	Beam angles
2700 K, 3000 K, 4000 K	97 CRI	100°
IP rating	Certifications	Mounting
IP20	RoHS, CE	Magnetic track
Control	Finishes	
DALI, 0-10V, Bluetooth, Casambi	White, Black	

Dimensions

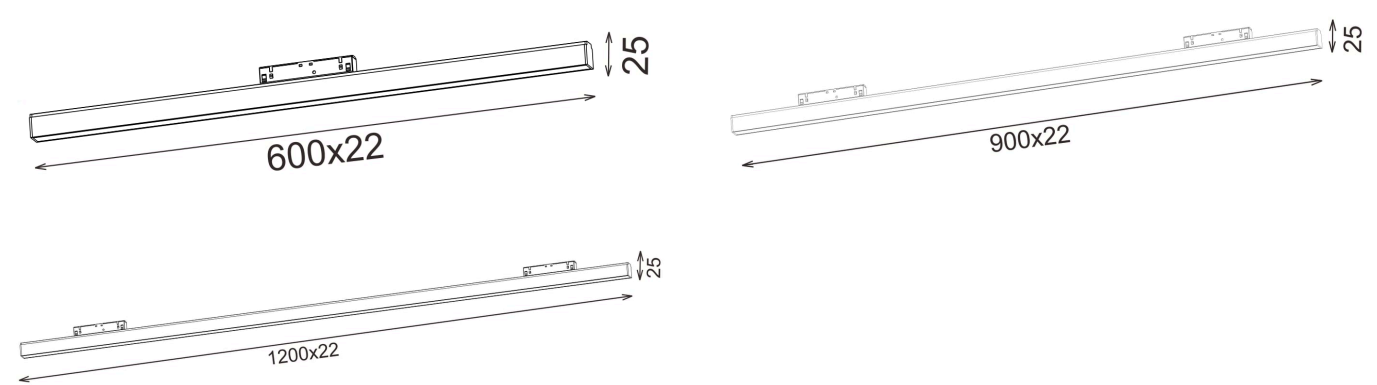

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CX-9236	15 W	48 V	1350 lm	97 CRI	600 × 22, H25 mm	100°
CX-9236	20 W	48 V	1800 lm	97 CRI	600 × 22, H25 mm	100°
CX-9237	20 W	48 V	1800 lm	97 CRI	900 × 22, H25 mm	100°
CX-9237	30 W	48 V	2700 lm	97 CRI	900 × 22, H25 mm	100°
CX-9238	30 W	48 V	2700 lm	97 CRI	1200 × 22, H25 mm	100°
CX-9238	40 W	48 V	3600 lm	97 CRI	1200 × 22, H25 mm	100°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-9238, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-9238, 40 W, 100° beam

