


Magnetic 23 mm system

CX-9240

23 mm linear luminaire

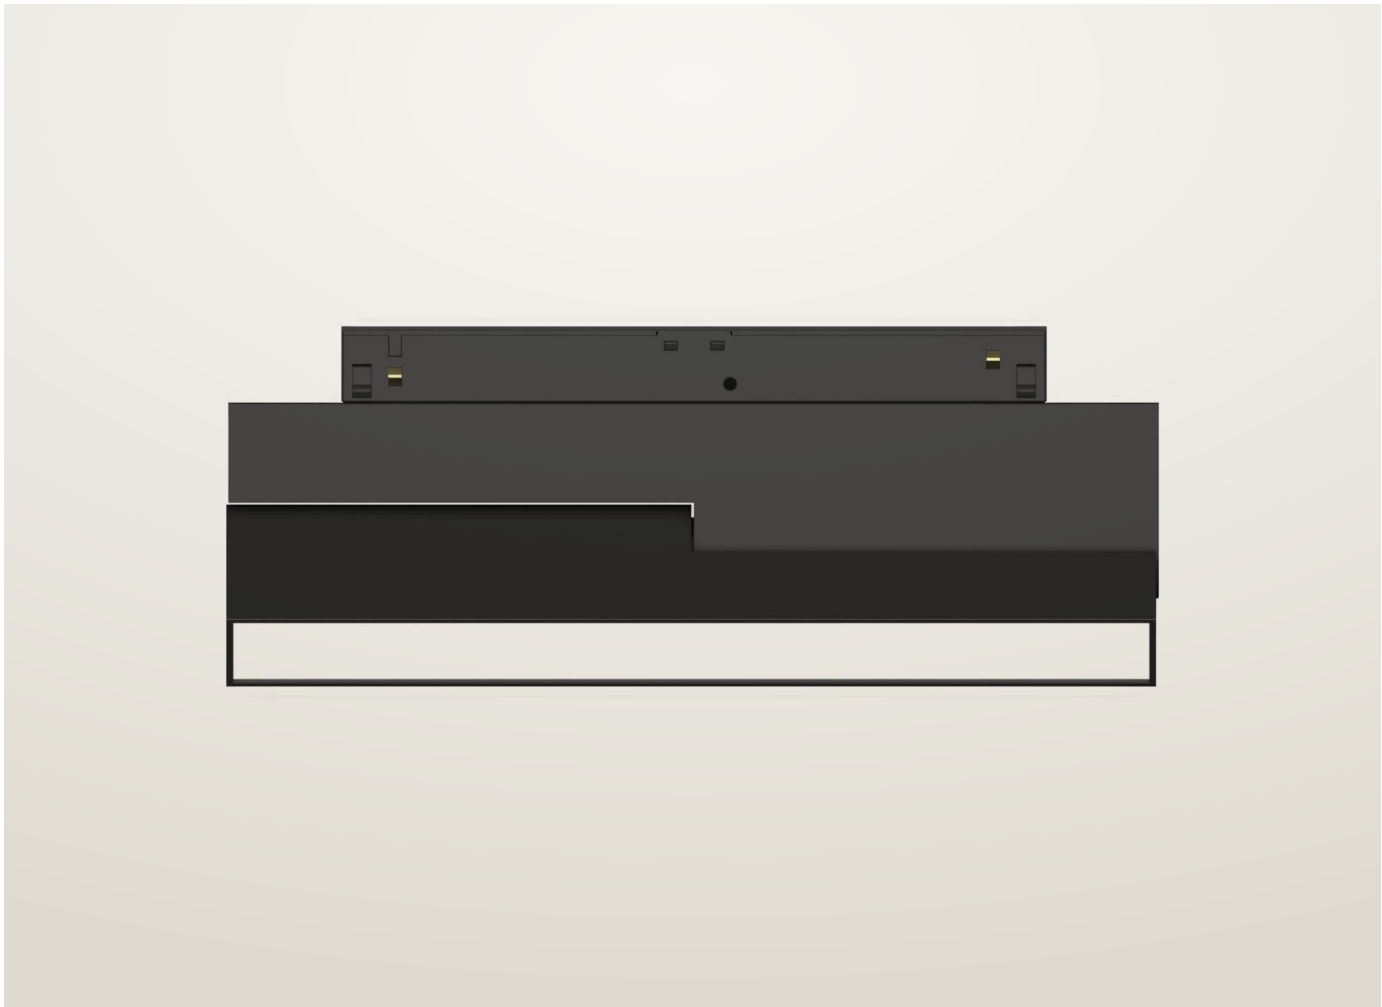


Linear luminaire for the 23 mm magnetic track. 6, 10, 12, 15, 20 or 28 W. 100° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power 6–28 W	Voltage 48 V	Luminous flux 540–2500 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 100°
IP rating IP20	Certifications RoHS, CE	Mounting Magnetic track
Control DALI, 0-10V, Bluetooth, Casambi	Finishes White, Black	

Dimensions

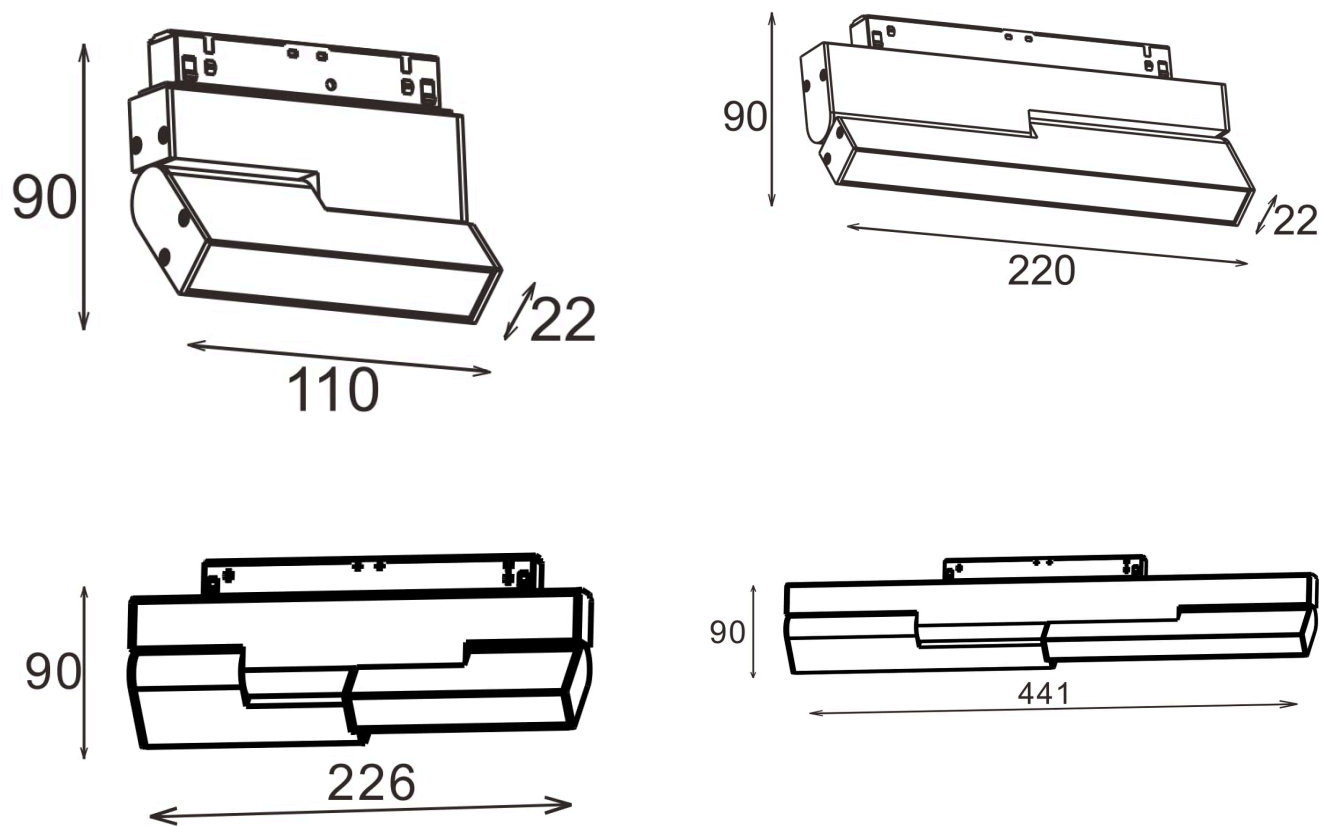


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CX-9240	6 W	48 V	540 lm	97 CRI	110 × 22, H90 mm	100°
CX-9242	10 W	48 V	900 lm	97 CRI	220 × 22, H90 mm	100°
CX-9242	15 W	48 V	1350 lm	97 CRI	220 × 22, H90 mm	100°
CX-9240D	10 W	48 V	900 lm	97 CRI	226, H90 mm	100°
CX-9240D	12 W	48 V	1080 lm	97 CRI	226, H90 mm	100°
CX-9242D	20 W	48 V	1800 lm	97 CRI	441, H90 mm	100°
CX-9242D	28 W	48 V	2500 lm	97 CRI	441, H90 mm	100°

Finishes



Black



White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-9242D, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-9242D, 28 W, 100° beam

