

Recessed

D3-2023

Recessed spotlight




Recessed spotlight. 28, 35 or 43 W. 50° beam. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø145 mm
- LED source: Citizen

Power 28 W, 35 W, 43 W	Voltage 220–240 V AC	Luminous flux 2700–2800 lm, 3400–3500 lm, 3900–4000 lm
Colour temperature 3000 K, 4000 K	CRI 97 CRI	Beam angles 50°
IP rating IP20	Certifications CE, RoHS, EMC, LVD	Mounting Recessed
Control On/Off, Triac, DALI, 0-10V, Casambi	Finishes White, Black, Grey	

Dimensions

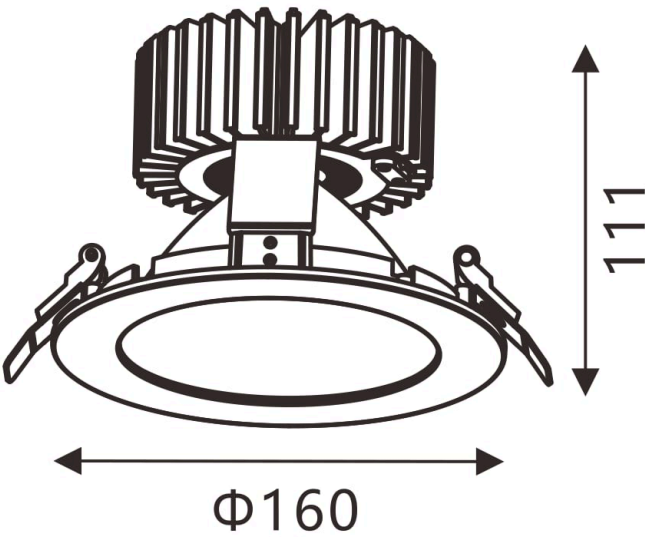


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam
D3-2023	28 W	220–240 V AC	2700–2800 lm	97 CRI	Ø160 × 111 mm	Ø145 mm	50°
D3-2023	35 W	220–240 V AC	3400–3500 lm	97 CRI	Ø160 × 111 mm	Ø145 mm	50°
D3-2023	43 W	220–240 V AC	3900–4000 lm	97 CRI	Ø160 × 111 mm	Ø145 mm	50°

Photometric data


Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

28 W

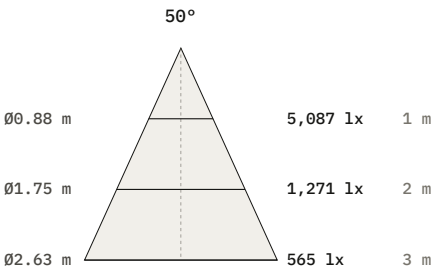


Beam	1 m	2 m	3 m
50°	5,087 lx Ø880 mm	1,271 lx Ø1750 mm	565 lx Ø2630 mm

35 W

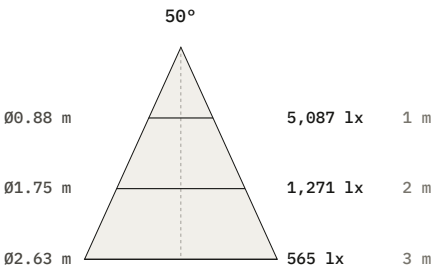

Beam	1 m	2 m	3 m
50°	5,087 lx Ø880 mm	1,271 lx Ø1750 mm	565 lx Ø2630 mm

43 W

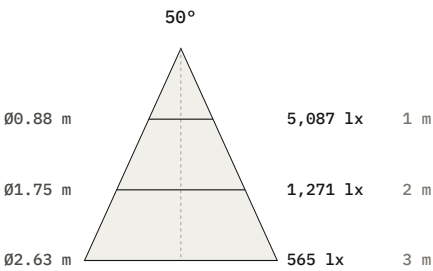

Beam	1 m	2 m	3 m
50°	5,087 lx Ø880 mm	1,271 lx Ø1750 mm	565 lx Ø2630 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for D3-2023, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

D3-2023, 43 W, 50° beam

