

Recessed

D3-2024

Recessed spotlight




Recessed spotlight. 43, 50 or 55 W. 45° beam. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø170 mm
- LED source: Citizen

Power 43 W, 50 W, 55 W	Voltage 220–240 V AC	Luminous flux 4200–4300 lm, 4900–5000 lm, 5400–5500 lm
Colour temperature 3000 K, 4000 K	CRI 97 CRI	Beam angles 45°
IP rating IP20	Certifications CE, RoHS, EMC, LVD	Mounting Recessed
Control On/Off, Triac, DALI, 0-10V, Casambi	Finishes White, Black, Grey	

Dimensions

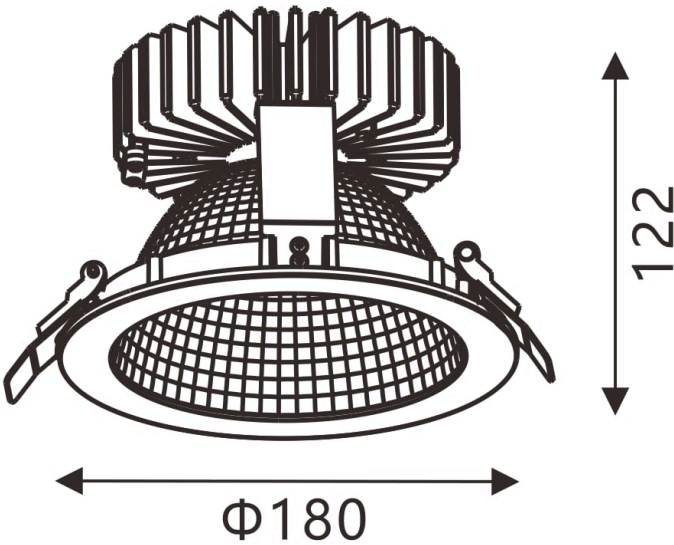


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam
D3-2024	43 W	220–240 V AC	4200–4300 lm	97 CRI	Ø180 × 122 mm	Ø170 mm	45°
D3-2024	50 W	220–240 V AC	4900–5000 lm	97 CRI	Ø180 × 122 mm	Ø170 mm	45°
D3-2024	55 W	220–240 V AC	5400–5500 lm	97 CRI	Ø180 × 122 mm	Ø170 mm	45°

Photometric data


Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

43 W

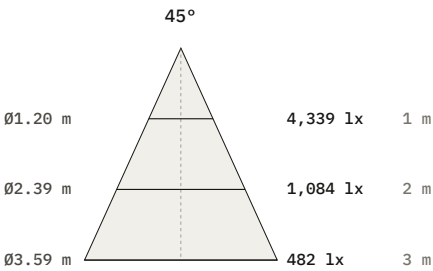


Beam	1 m	2 m	3 m
45°	4,339 lx Ø1200 mm	1,084 lx Ø2390 mm	482 lx Ø3590 mm

50 W

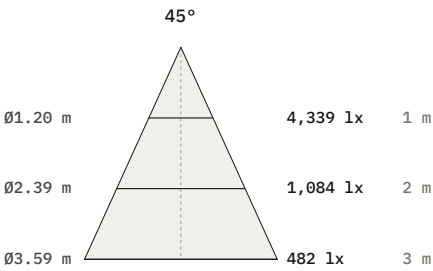

Beam	1 m	2 m	3 m
45°	4,339 lx Ø1200 mm	1,084 lx Ø2390 mm	482 lx Ø3590 mm

55 W

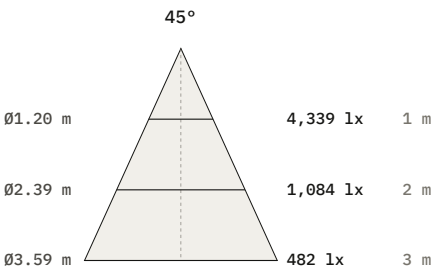

Beam	1 m	2 m	3 m
45°	4,339 lx Ø1200 mm	1,084 lx Ø2390 mm	482 lx Ø3590 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for D3-2024, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

D3-2024, 55 W, 45° beam

