

Recessed

D3-2029

Recessed spotlight




Recessed spotlight. 50 or 55 W. 90° beam. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø240 mm
- LED source: Citizen

Power 50 W, 55 W	Voltage 220–240 V AC	Luminous flux 4700 lm, 5200 lm
Colour temperature 3000 K, 4000 K	CRI 97 CRI	Beam angles 90°
IP rating IP20	Certifications CE, RoHS, EMC, LVD	Mounting Recessed
Control On/Off, Triac, DALI, 0-10V, Casambi	Finishes White, Black, Grey	

Dimensions

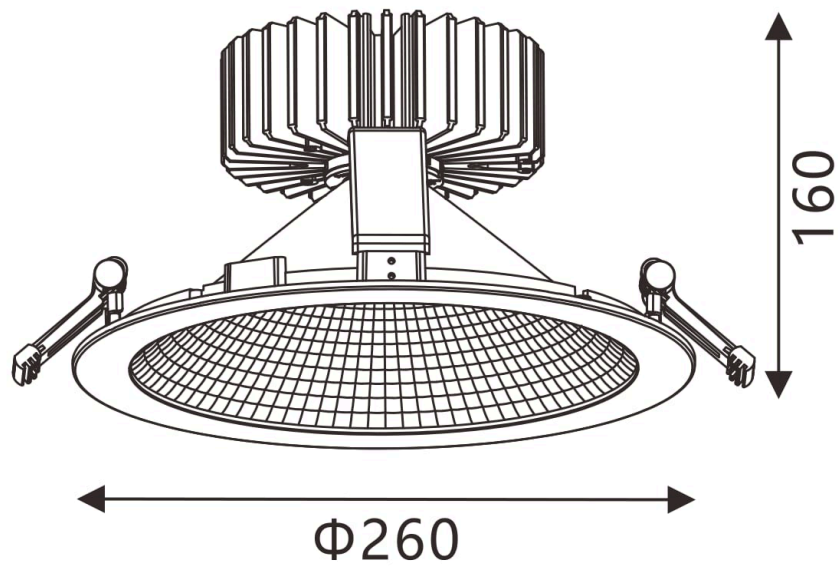


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam
D3-2029	50 W	220-240 V AC	4700 lm	97 CRI	Ø260 × 160 mm	Ø240 mm	90°
D3-2029	55 W	220-240 V AC	5200 lm	97 CRI	Ø260 × 160 mm	Ø240 mm	90°

Photometric data


Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

50 W

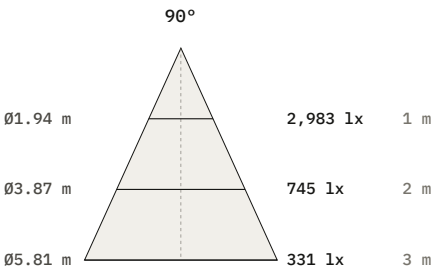

Beam	1 m	2 m	3 m
90°	2,983 lx Ø1940 mm	745 lx Ø3870 mm	331 lx Ø5810 mm

55 W

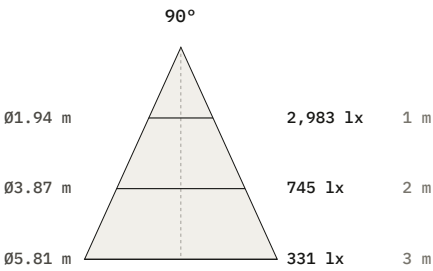

Beam	1 m	2 m	3 m
90°	2,983 lx Ø1940 mm	745 lx Ø3870 mm	331 lx Ø5810 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for D3-2029, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

D3-2029, 55 W, 90° beam

