


Recessed

D3-4228-TLF

Recessed spotlight

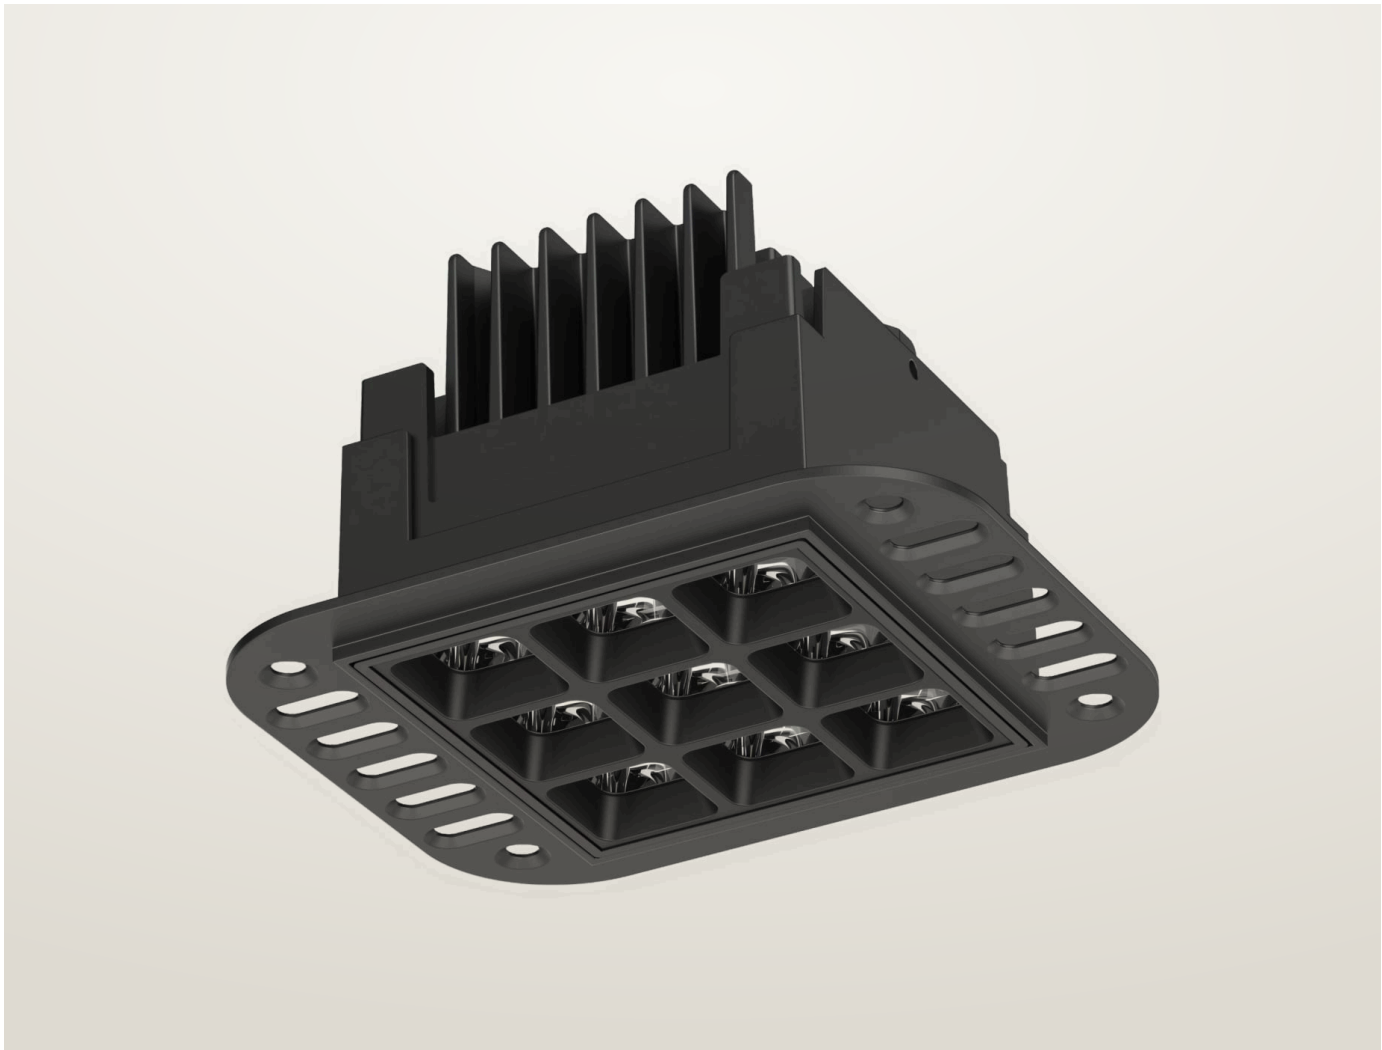


Recessed spotlight. 18 W. 50° beam. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø70 mm
- LED source: Citizen

Power 18 W	Luminous flux 1300–1400 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 50°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Recessed	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

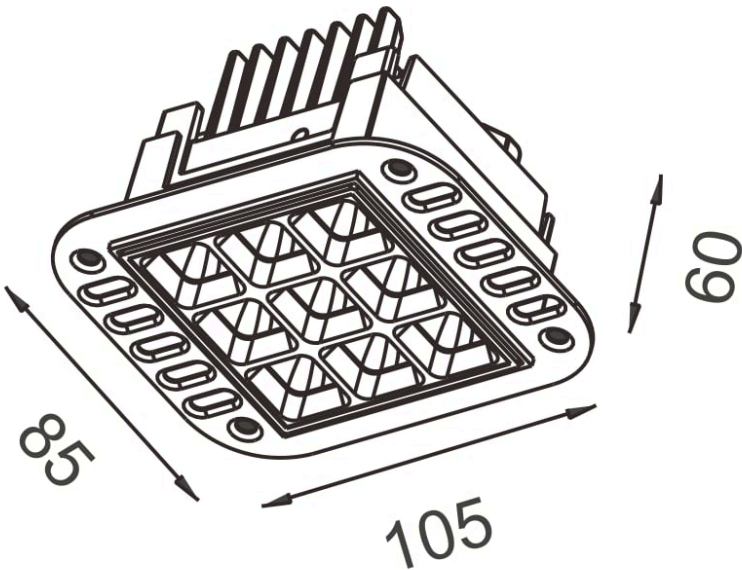

Models

Code	Version	Power	Flux	CRI	Size	Cut-out	Beam
D3-4228-TLF	Trimless fixed (TLF)	18 W	1300–1400 lm	97 CRI	L105 x W85 x H60 mm	Ø70 mm	50°


Finishes



Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


18 W

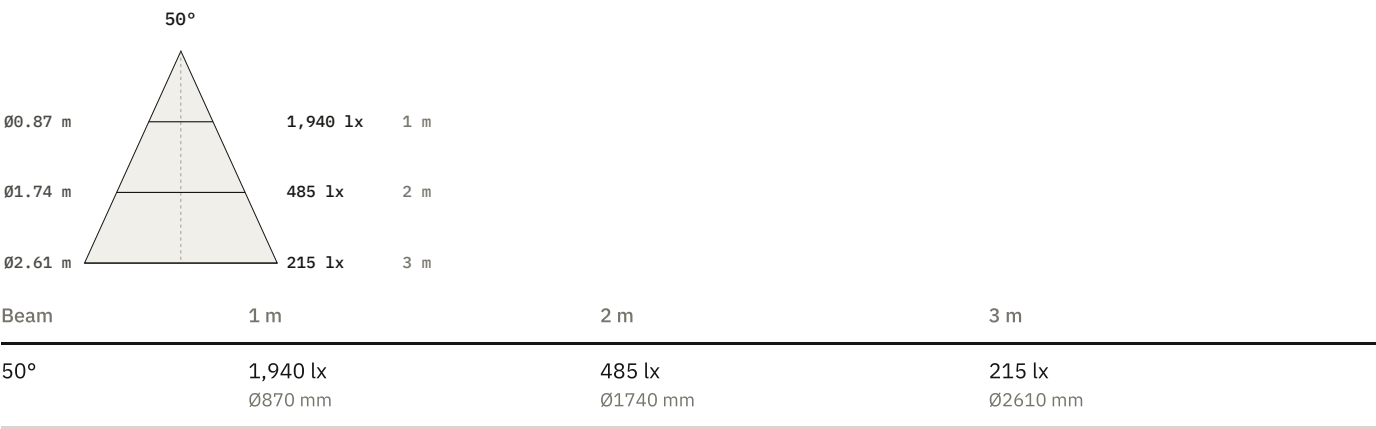

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for D3-4228-TLF, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

D3-4228-TLF, 18 W, 50° beam

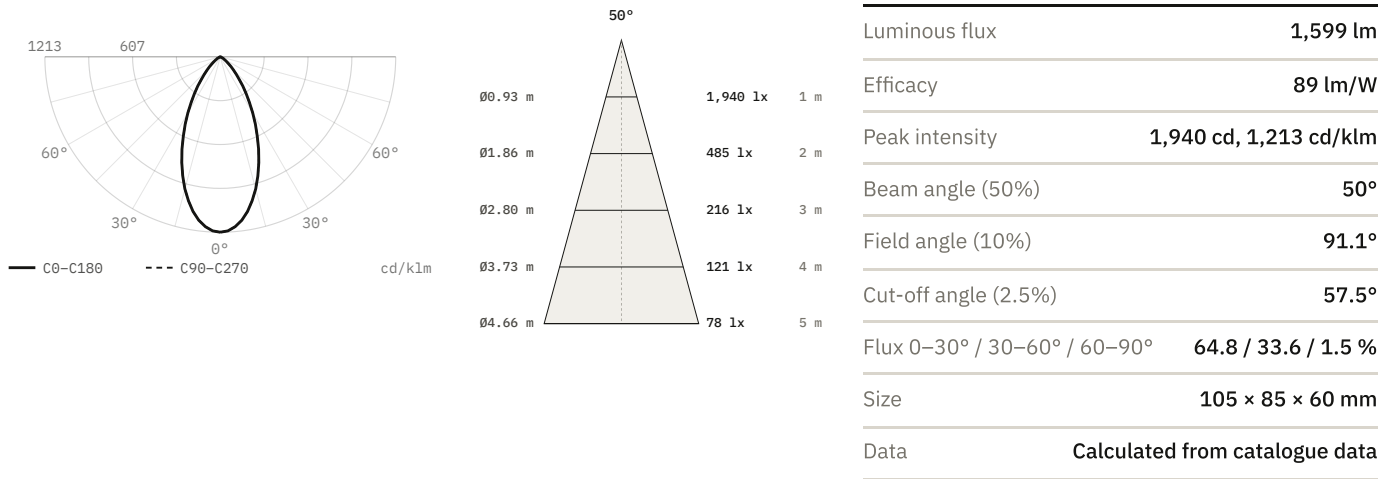

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.