

Outdoor

Deck DL0195

Outdoor luminaire




Outdoor luminaire.

- Ceiling cut-out Ø34 mm
- LED source: Citizen

Voltage max 3 V, 24 V DC	Luminous flux 60 / 130 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°	IP rating IP67
Certifications CE	Mounting Floor, Recessed, Wall	Finishes Black

Dimensions

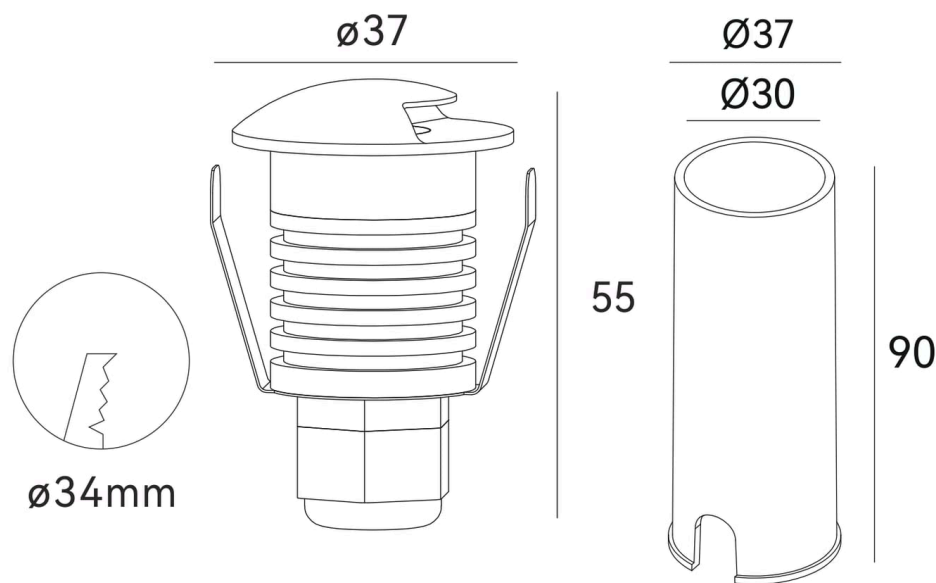


Models

Code	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0195	max 3 V, 24 V DC	60 / 130 lm	97 CRI	$\varnothing 37 \times 55\text{ mm}$	$\varnothing 34\text{ mm}$	15° 24° 36° 60°	350 / 700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0195, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0195, 15° beam

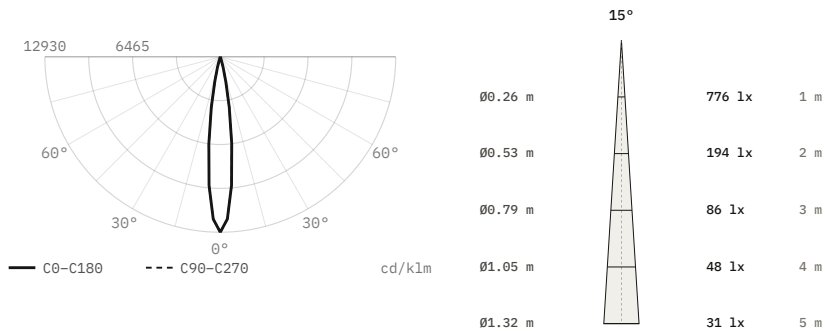


Luminous flux	60 lm
Peak intensity	776 cd, 12,930 cd/k1m
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data

DL0195, 24° beam

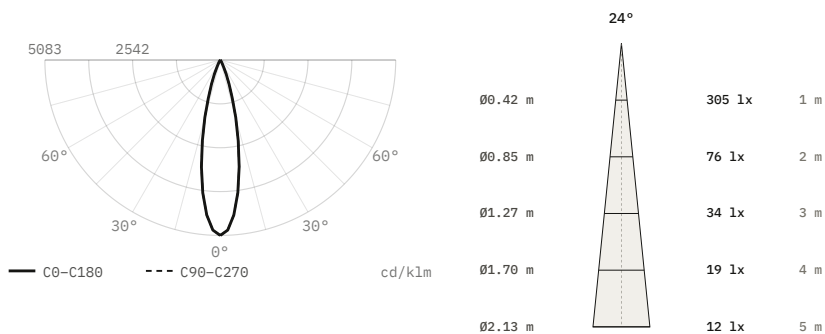



Luminous flux	60 lm
Peak intensity	305 cd, 5,083 cd/k1m
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data

DL0195, 36° beam

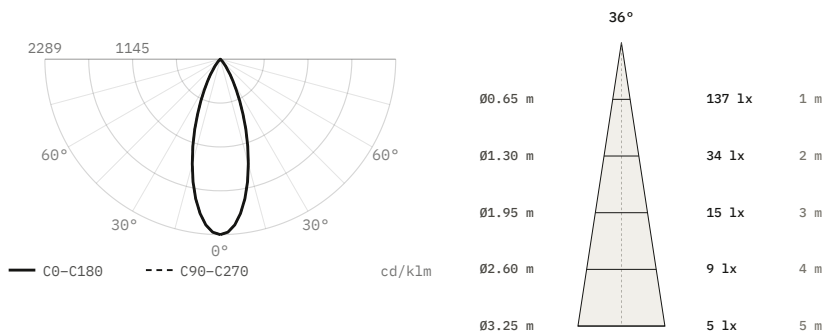

Luminous flux	60 lm
Peak intensity	137 cd, 2,289 cd/k1m
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data

DL0195, 60° beam

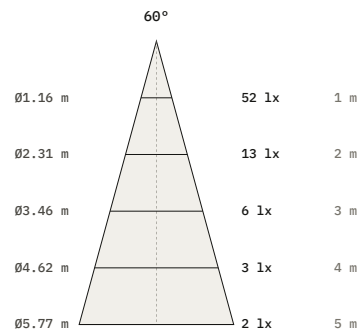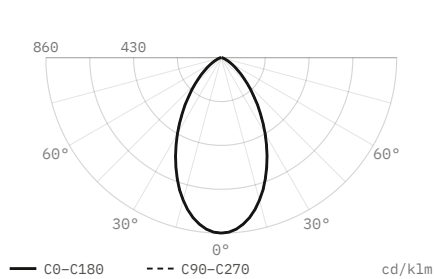

Luminous flux	60 lm
Peak intensity	52 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.