

Outdoor

Deck DL1485

Outdoor luminaire



Outdoor luminaire. 7 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø60 mm
- LED source: Citizen

Power 7 W	Voltage max 19 V	Luminous flux 650 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°
IP rating IP67	Certifications CE	Mounting Recessed, Wall
Finishes Black		


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1485	7 W	max 19 V	650 lm	97 CRI	Ø80 x H75 mm	Ø60 mm	15° 24° 36° 60°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1485, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1485, 7 W, 15° beam

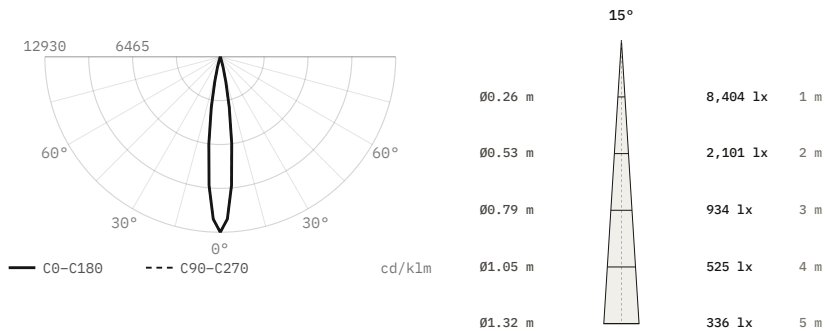


Luminous flux	650 lm
Efficacy	93 lm/W
Peak intensity	8,404 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø80 × 75 mm
Data	Calculated from catalogue data

DL1485, 7 W, 24° beam

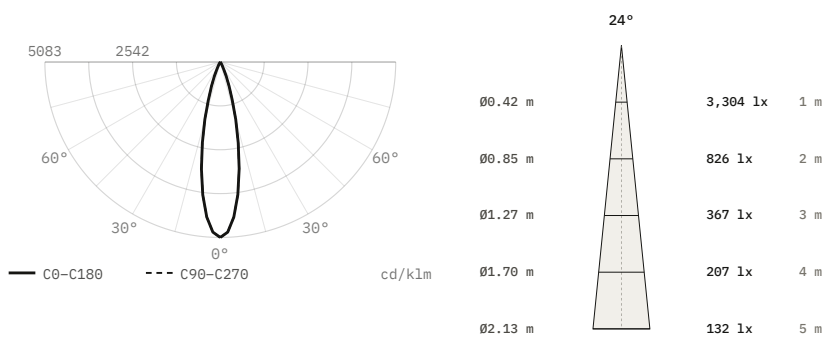


Luminous flux	650 lm
Efficacy	93 lm/W
Peak intensity	3,304 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø80 × 75 mm
Data	Calculated from catalogue data

DL1485, 7 W, 36° beam

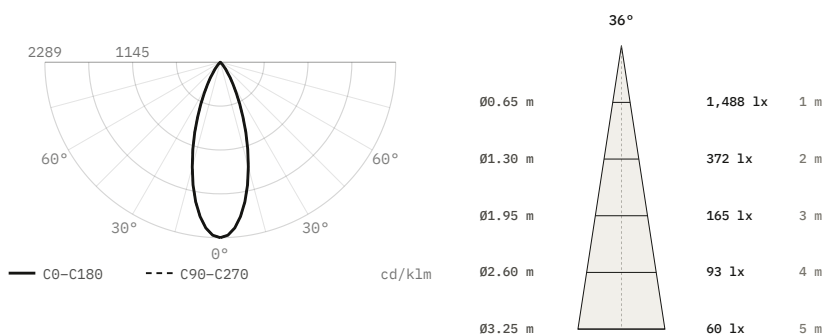

Luminous flux	650 lm
Efficacy	93 lm/W
Peak intensity	1,488 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø80 × 75 mm
Data	Calculated from catalogue data

DL1485, 7 W, 60° beam

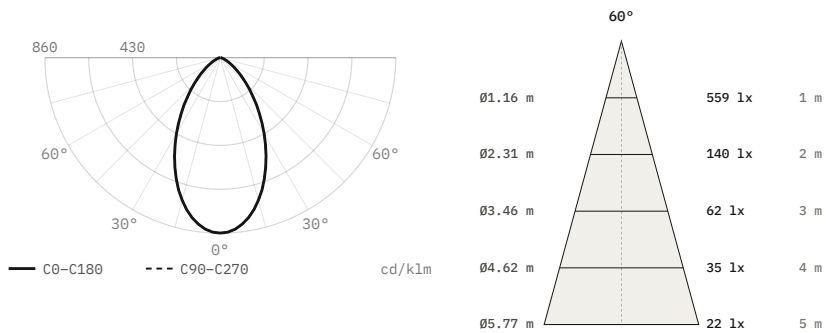

Luminous flux	650 lm
Efficacy	93 lm/W
Peak intensity	559 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0-30° / 30-60° / 60-90°	52.4 / 42.6 / 5 %
Size	Ø80 × 75 mm
Data	Calculated from catalogue data