

Recessed

DL1001

Recessed spotlight




Recessed spotlight. 13 W. 2700, 3000, 4000 K. 97 CRI.

Ceiling cut-out Ø55 mm

LED source: Citizen

Power 13 W	Voltage max 37 V	Luminous flux 1160 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE	Mounting Recessed	Finishes White

Dimensions

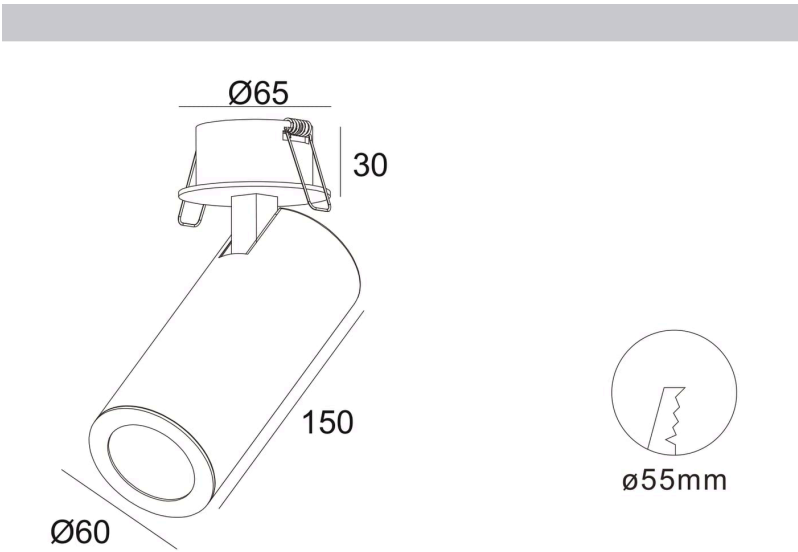


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1001	36° × 39°, wall washer	13 W	max 37 V	1160 lm	97 CRI	Flange Ø65 × 30 mm; tube Ø60 × 150 mm	Ø55 mm	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1001, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1001, 13 W, wall washer

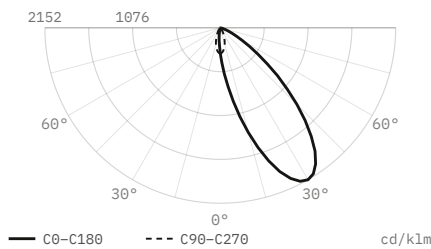

Luminous flux	1,160 lm
Efficacy	89 lm/W
Peak intensity	2,496 cd, 2,152 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	71.5°
Flux 0–30° / 30–60° / 60–90°	39.2 / 57.5 / 3.3 %
Size	Ø65 × 30 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.