Recessed

Dot DL0178

Recessed spotlight

Recessed spotlight. 1 W. 50° beam. 2700, 3000, 4000 K. IP44. 97 CRI.

- Ceiling cut-out Ø12 mm
- LED source: Citizen

Power **1 W**	Voltage **max 3 V**	Luminous flux **80 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **50°**
IP rating **IP44**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

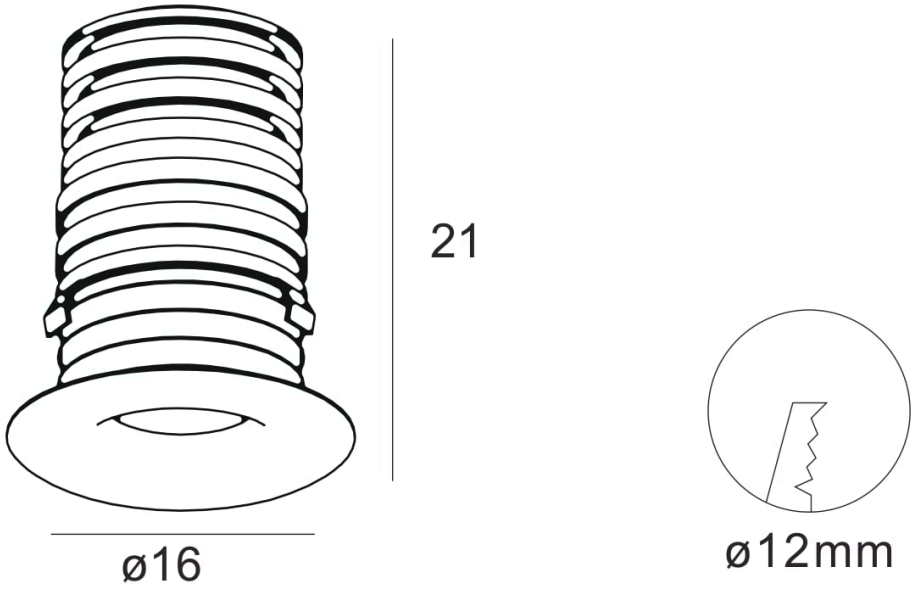

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0178	1 W	max 3 V	80 lm	97 CRI	Ø16 x H21 mm	Ø12 mm	50°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0178, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0178, 1 W, 50° beam

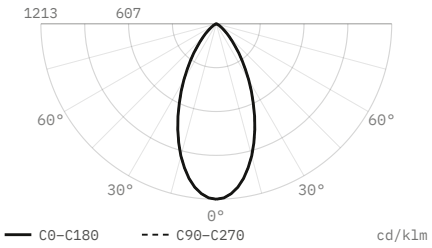

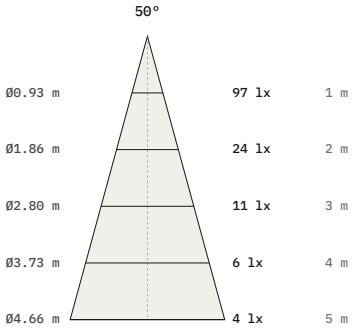

Luminous flux	80 lm
Efficacy	80 lm/W
Peak intensity	97 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø16 × 21 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.