

Recessed

Dot DL0308

Recessed spotlight




Recessed spotlight. 1 W. 50° beam. 2700, 3000, 4000 K. IP44. 97 CRI.

- Ceiling cut-out Ø12 mm
- LED source: Citizen

Power 1 W	Voltage max 3 V	Luminous flux 80 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 50°
IP rating IP44	Certifications CE	Mounting Recessed

Dimensions

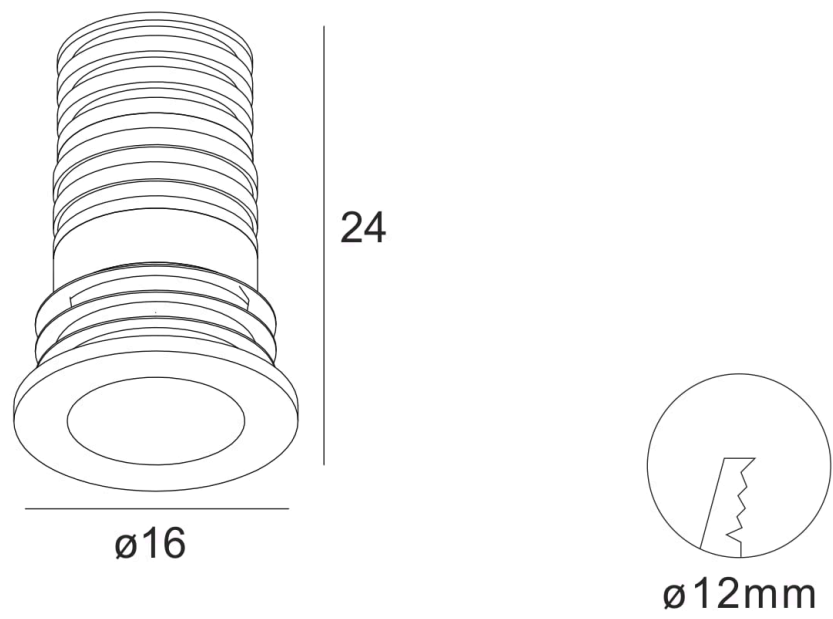

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0308	1 W	max 3 V	80 lm	97 CRI	$\varnothing 16 \times H24 \text{ mm}$	$\varnothing 12 \text{ mm}$	50°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0308, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0308, 1 W, 50° beam

