

Recessed

Dot DL1335

Recessed spotlight



Recessed spotlight.

- Ceiling cut-out Ø34 mm
- LED source: Citizen

Voltage 24 V DC, max 3 V	Luminous flux 72 / 140 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°	IP rating IP44
Certifications CE	Mounting Recessed	Finishes White


Models

Code	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1335	24 V DC, max 3 V	72 / 140 lm	97 CRI	Ø37 × 41 mm	Ø34 mm	15° 24° 36° 60°	350 / 700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1335, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1335, 15° beam

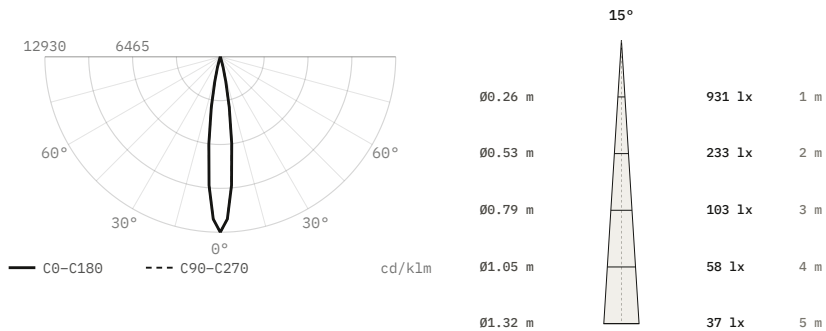


Luminous flux	72 lm
Peak intensity	931 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø37 × 41 mm
Data	Calculated from catalogue data

DL1335, 24° beam

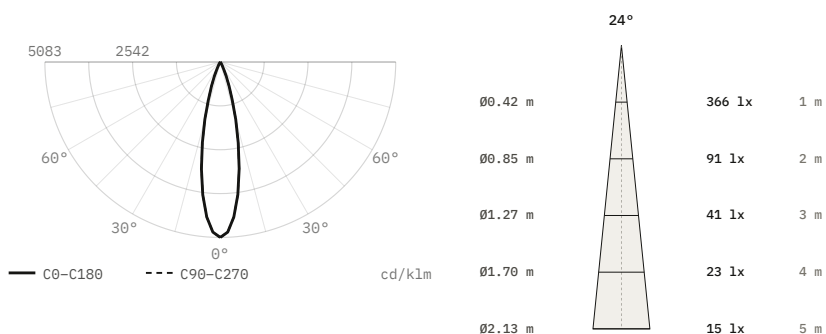

Luminous flux	72 lm
Peak intensity	366 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø37 × 41 mm
Data	Calculated from catalogue data

DL1335, 36° beam

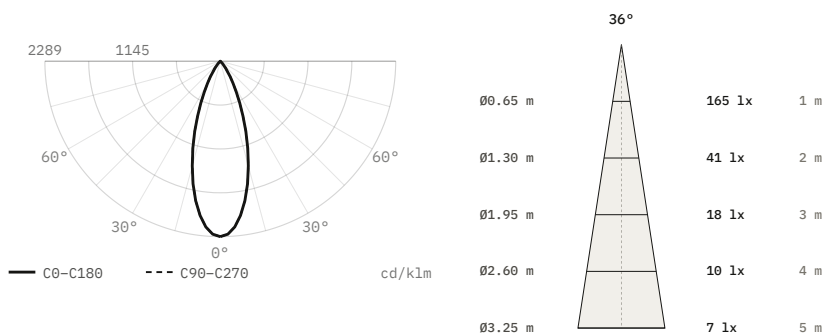

Luminous flux	72 lm
Peak intensity	165 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø37 × 41 mm
Data	Calculated from catalogue data

DL1335, 60° beam

