

Recessed

Dot DL1779

Recessed spotlight



Recessed spotlight.

- Ceiling cut-out Ø35 / Ø45 mm
- LED source: Citizen

Voltage max 10 V	Luminous flux 280 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 55°	IP rating IP65
Certifications CE	Mounting Recessed	Finishes White, Black

Models

Code	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1779	max 10 V	280 lm	97 CRI	Ø39 × 39 mm	Ø35 mm	15° 24° 36° 55°	350 mA
DL1991	max 10 V	280 lm	97 CRI	Ø34 × 39 mm; trim flange 80 × 38 (18 mm)	Ø45 mm	15° 24° 36° 55°	350 mA

Finishes



Black




White

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1779, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1779, 15° beam

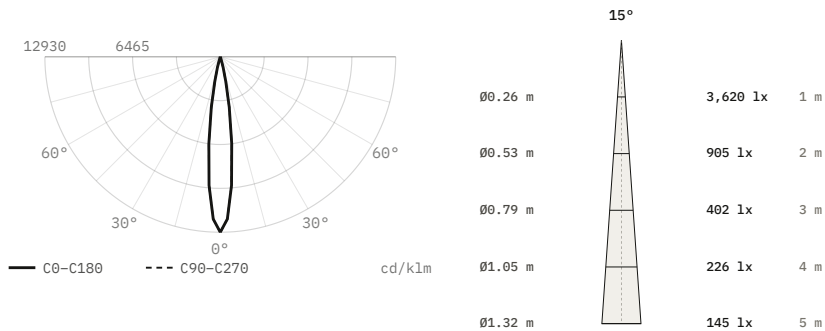


Luminous flux	280 lm
Peak intensity	3,620 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø39 mm
Data	Calculated from catalogue data

DL1779, 24° beam

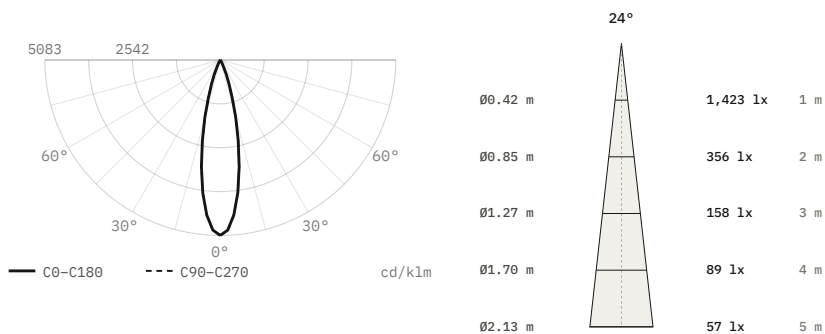



Luminous flux	280 lm
Peak intensity	1,423 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø39 mm
Data	Calculated from catalogue data

DL1779, 36° beam

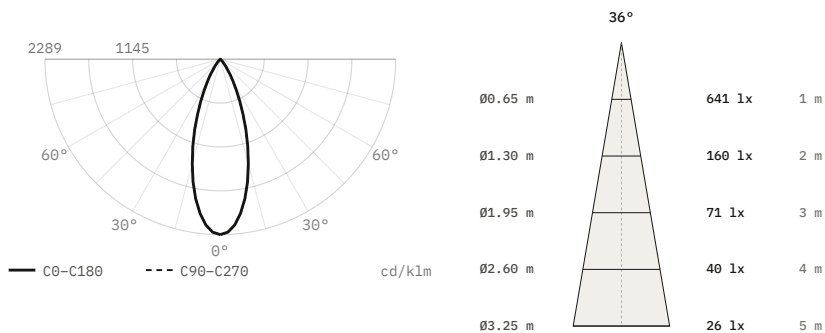

Luminous flux	280 lm
Peak intensity	641 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø39 mm
Data	Calculated from catalogue data

DL1779, 55° beam

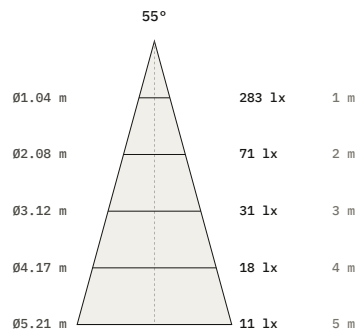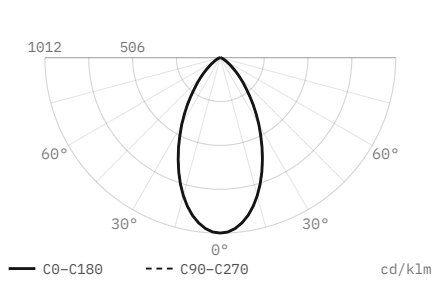

Luminous flux	280 lm
Peak intensity	283 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	Ø39 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.