


Surface

Eric Surface

Surface luminaire

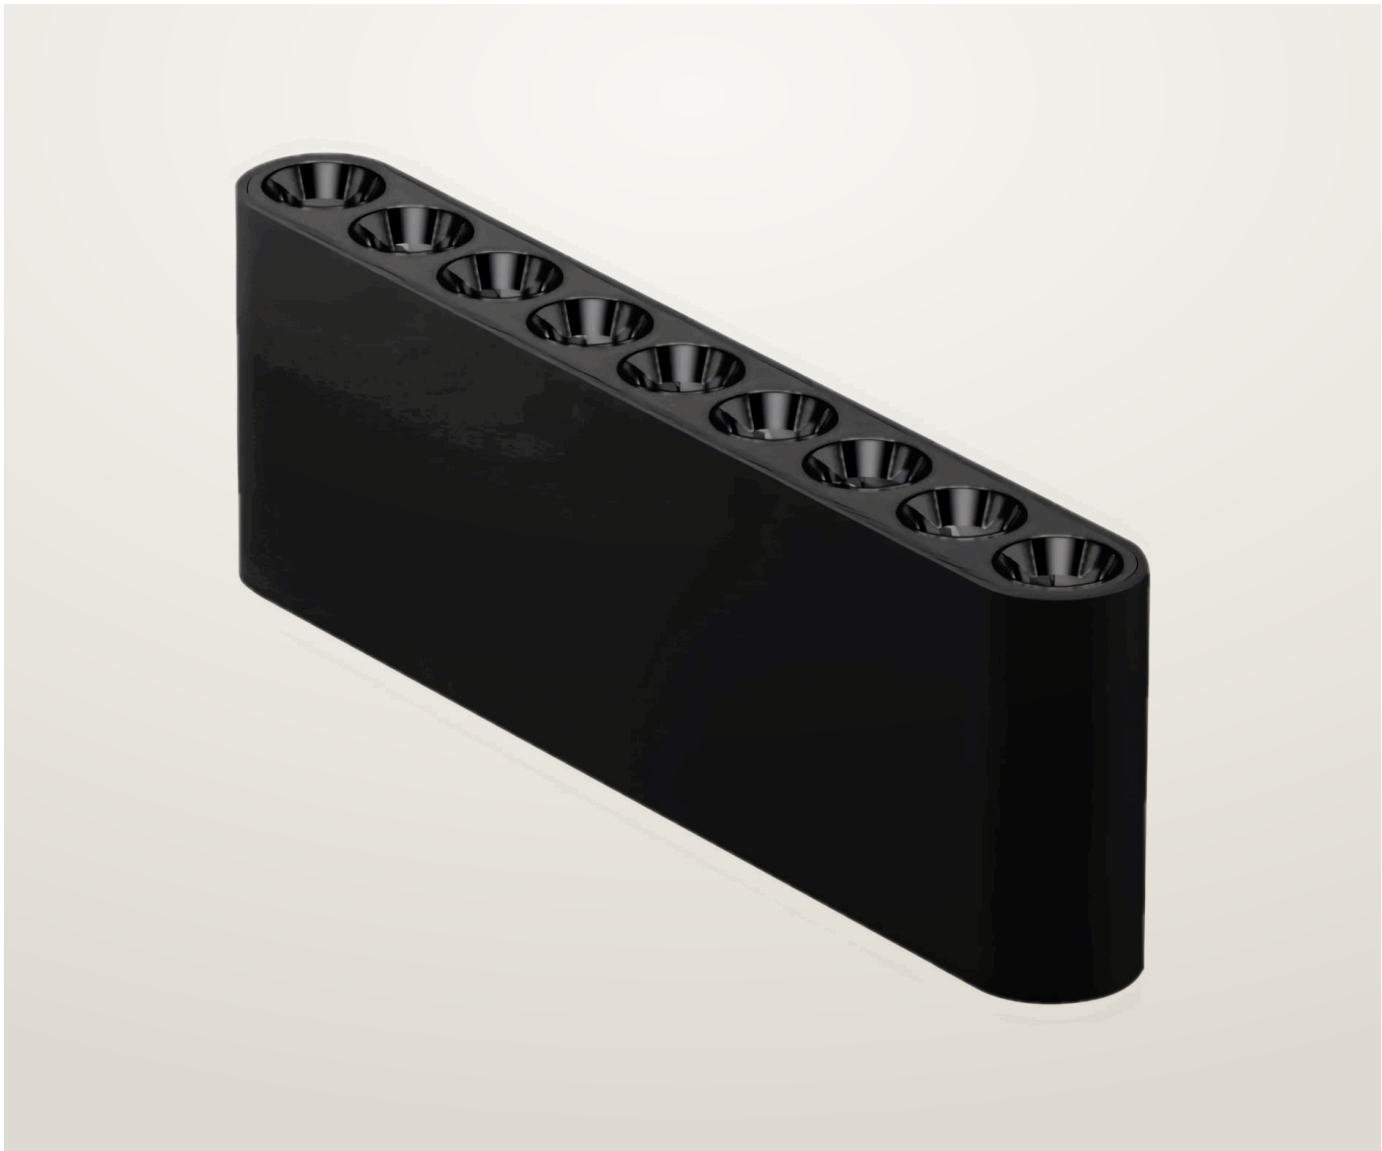


Surface luminaire. 5, 10 or 15 W. 24° or 36° beam.
2700, 3000, 4000, 5500 K. 97 CRI.

- LED source: Citizen
- UGR <12 (24°), <18 (36°)


Power 5 W, 10 W, 15 W	Voltage 9 V, 17 V, 26 V	Colour temperature 2700 K, 3000 K, 4000 K, 5500 K
CRI 97 CRI	Beam angles 24°, 36°	IP rating IP20
Mounting Surface	Control On/Off	Finishes White, Black, Silver, Brass, Bronze

Dimensions


5W

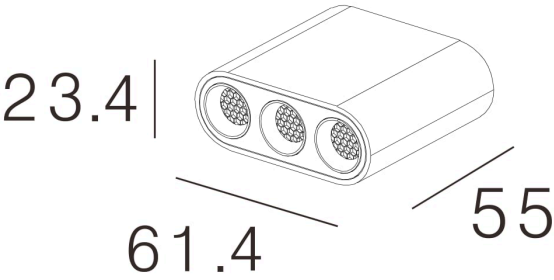

10W

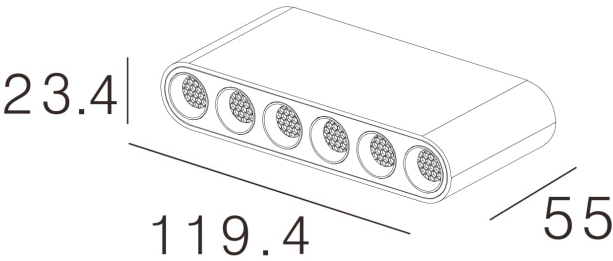

15W

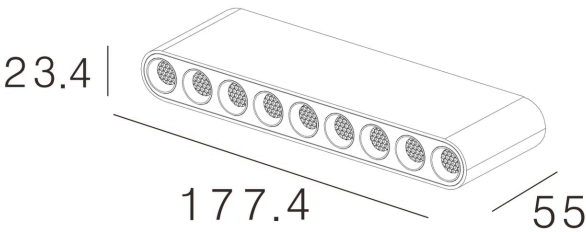

Models

Code	Power	Voltage	CRI	Size	Beam	Notes
SU-ERIC-0801-3	5 W	9 V	97 CRI	61.4 × 55 × 23.4 mm	24° 36°	500 mA
SU-ERIC-1501-6	10 W	17 V	97 CRI	119.4 × 55 × 23.4 mm	24° 36°	500 mA
SU-ERIC-2101-9	15 W	26 V	97 CRI	177.4 × 55 × 23.4 mm	24° 36°	500 mA

Finishes



Black



White




Silver

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-ERIC-2101-9, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SU-ERIC-2101-9, 15 W, 24° beam

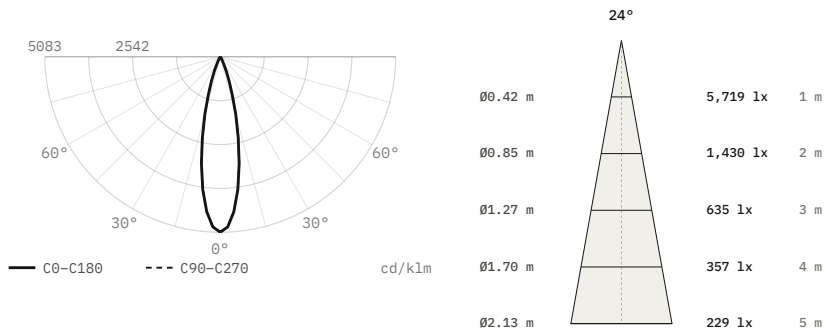

Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	5,719 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	177.4 × 55 × 23.4 mm
Data	Estimated from catalogue data

SU-ERIC-2101-9, 15 W, 36° beam

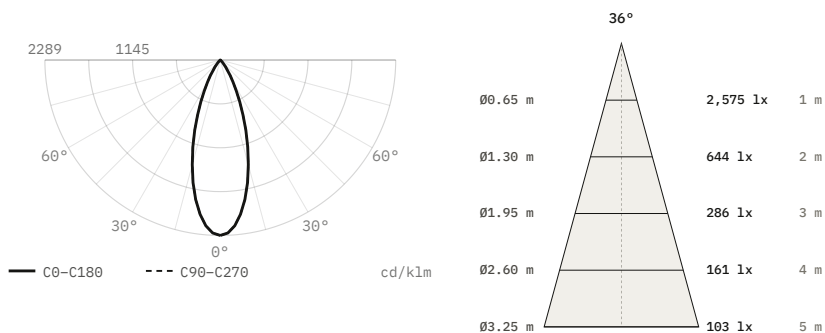

Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	2,575 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	177.4 × 55 × 23.4 mm
Data	Estimated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.