

Outdoor

Evan

Outdoor luminaire




Outdoor luminaire. 30, 42 or 53 W. 120° beam. 2700, 3000, 4000 K. IP65. 97 CRI.

— LED source: Citizen

Power	Voltage	Colour temperature
30 W, 42 W, 53 W	220–240 V AC	2700 K, 3000 K, 4000 K
CRI	Beam angles	IP rating
97 CRI	120°	IP65
Mounting	Control	Finishes
Surface, Wall	On/Off, Triac	White, Black


Dimensions

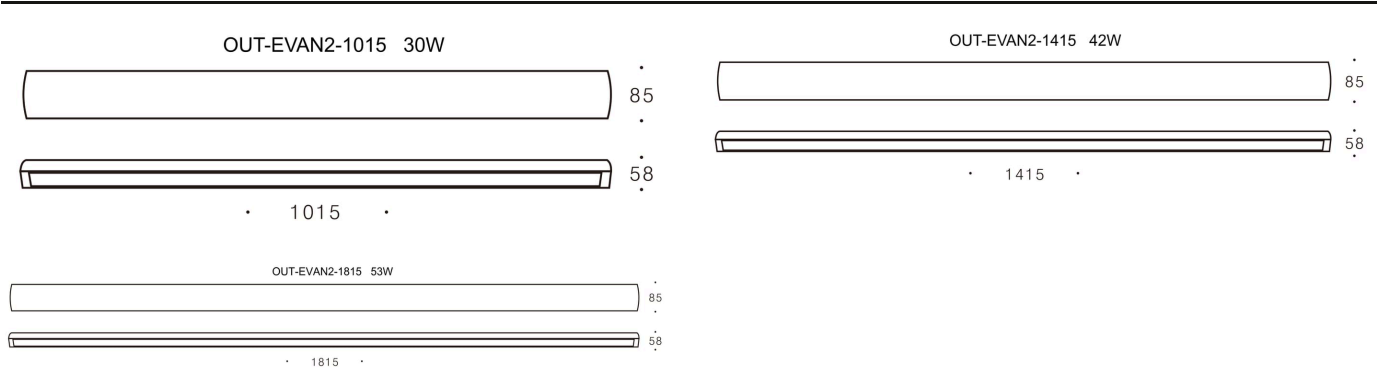


Models

Code	Version	Power	Voltage	CRI	Size	Beam
OUT-EVAN2-1015	1015 mm	30 W	220-240 V AC	97 CRI	1015 × 85 × 58 mm	120°
OUT-EVAN2-1415	1415 mm	42 W	220-240 V AC	97 CRI	1415 × 85 × 58 mm	120°
OUT-EVAN2-1815	1815 mm	53 W	220-240 V AC	97 CRI	1815 × 85 × 58 mm	120°
OUT-EVAN2-1015		30 W	220-240 V AC	97 CRI	1015 × 85 × 58 mm	120°
OUT-EVAN2-1415		42 W	220-240 V AC	97 CRI	1415 × 85 × 58 mm	120°
OUT-EVAN2-1815		53 W	220-240 V AC	97 CRI	1815 × 85 × 58 mm	120°

Finishes



Black




White





Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OUT-EVAN2-1815, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OUT-EVAN2-1815, 53 W, 120° beam

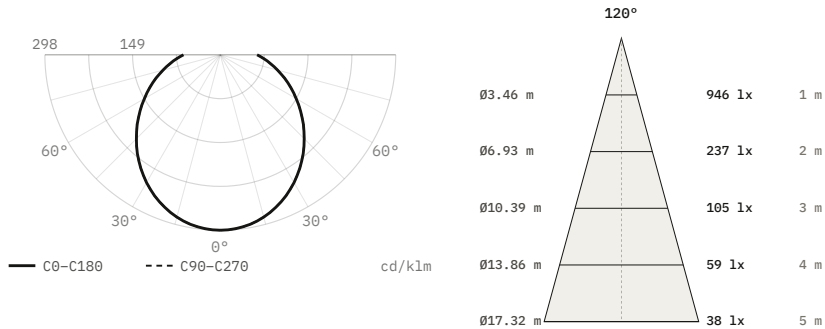

Luminous flux	3,180 lm
Efficacy	60 lm/W
Peak intensity	946 cd, 298 cd/klm
Beam angle (50%)	120°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23 / 45.1 / 31.8 %
Size	1815 × 85 × 58 mm
Data	Estimated from catalogue data