

Recessed

Fort DL1255

Recessed spotlight




Recessed spotlight. 10 or 13 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. IP54. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power 10 W, 13 W	Luminous flux 960 lm, 1180 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 55°	IP rating IP54
Certifications CE	Mounting Recessed	Finishes Black

Dimensions

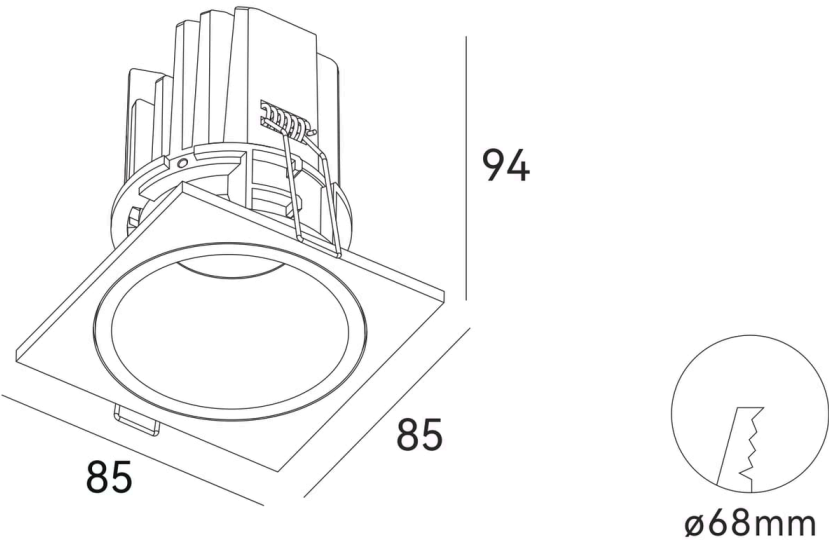


Models

Code	Power	Flux	CRI	Size	Cut-out	Beam	Notes
DL1255	10 W	960 lm	97 CRI	85 × 85 x H94 mm	Ø68 mm	15° 24° 36° 55°	250 / 350 mA
DL1255	13 W	1180 lm	97 CRI	85 × 85 x H94 mm	Ø68 mm	15° 24° 36° 55°	250 / 350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1255, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1255, 13 W, 15° beam

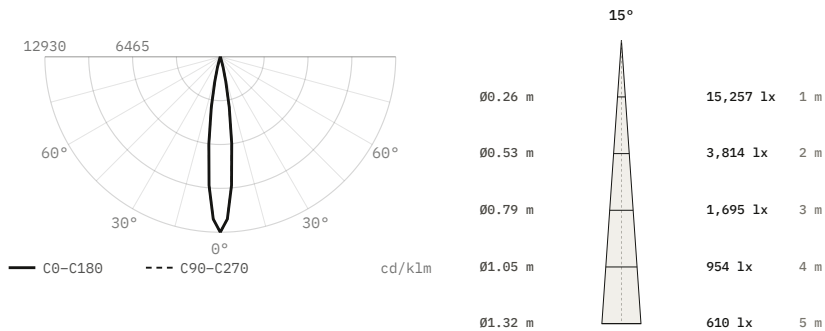


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	15,257 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	85 × 85 × 94 mm
Data	Calculated from catalogue data

DL1255, 13 W, 24° beam

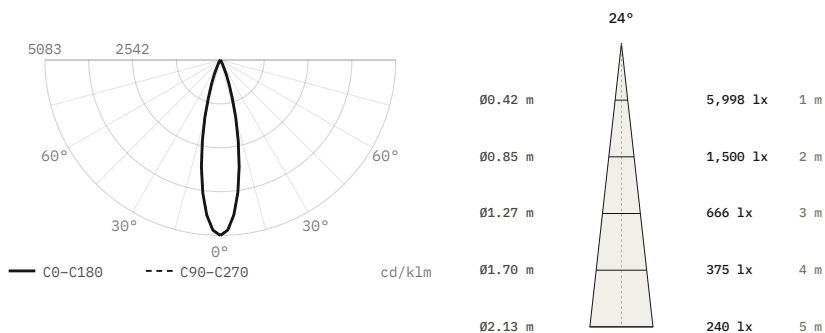


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	85 × 85 × 94 mm
Data	Calculated from catalogue data

DL1255, 13 W, 36° beam

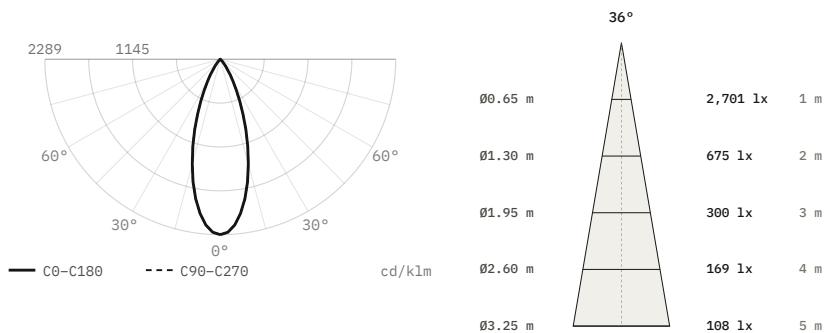

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	85 × 85 × 94 mm
Data	Calculated from catalogue data

DL1255, 13 W, 55° beam

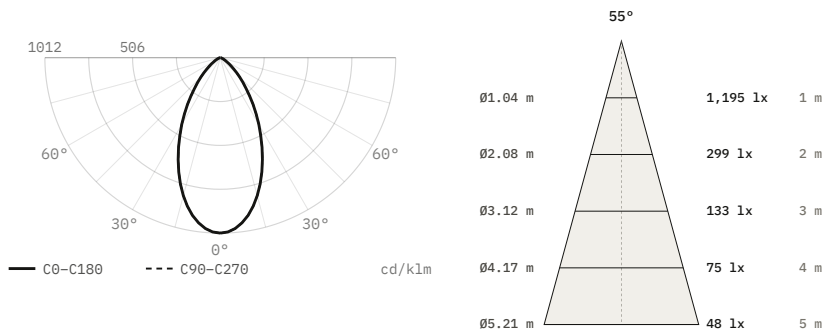

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,195 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0-30° / 30-60° / 60-90°	58.2 / 38.8 / 3 %
Size	85 × 85 × 94 mm
Data	Calculated from catalogue data