

Recessed

Grill DL0042

Recessed spotlight




Recessed spotlight. 13, 18, 26, 33 or 39 W. Three beam angles, 15° to 36°. 2700, 3000, 4000 K. 97 CRI.

Ceiling cut-out Ø115 mm

LED source: Citizen

Power 13–39 W	Voltage max 37 V	Luminous flux 1300–3900 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Control DALI, 0-10V		

Dimensions

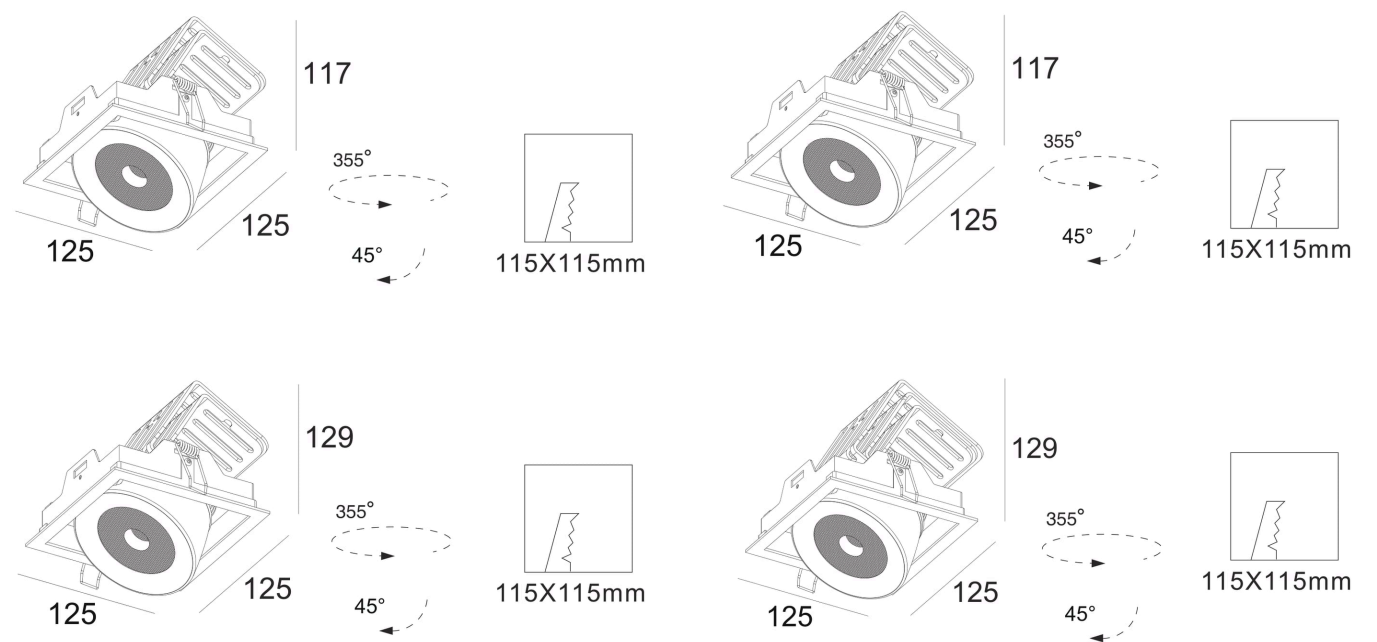


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0042	1 head	13 W	max 37 V	1300 lm	97 CRI	125 × 125 x H117 mm	Ø115 mm	15° 24° 36°	350 mA
DL0043	1 head	18 W	max 37 V	1800 lm	97 CRI	125 × 125 x H117 mm	Ø115 mm	15° 24° 36°	500 mA
DL0044	1 head	26 W	max 37 V	2600 lm	97 CRI	125 × 125 x H129 mm	Ø115 mm	15° 24° 36°	700 mA
DL0045	1 head	33 W	max 37 V	3300 lm	97 CRI	125 × 125 x H129 mm	Ø115 mm	15° 24° 36°	900 mA
DL1182	1 head	39 W	max 37 V	3900 lm	97 CRI	125 × 125 x H129 mm	Ø115 mm	15° 24° 36°	1050 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1182, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1182, 39 W, 15° beam

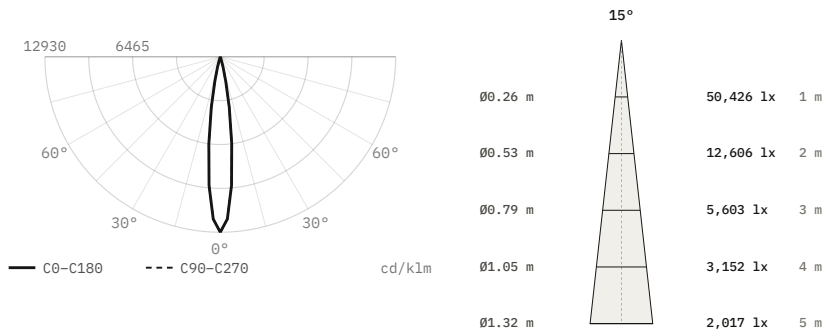


Luminous flux	3,900 lm
Efficacy	100 lm/W
Peak intensity	50,426 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	125 × 125 × 129 mm
Data	Calculated from catalogue data

DL1182, 39 W, 24° beam

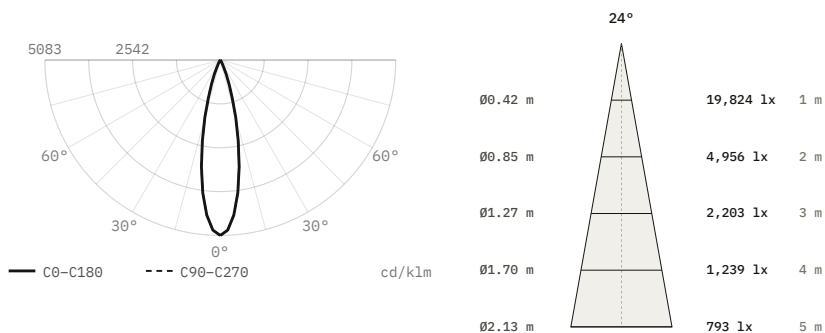

Luminous flux	3,900 lm
Efficacy	100 lm/W
Peak intensity	19,824 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	125 × 125 × 129 mm
Data	Calculated from catalogue data

DL1182, 39 W, 36° beam

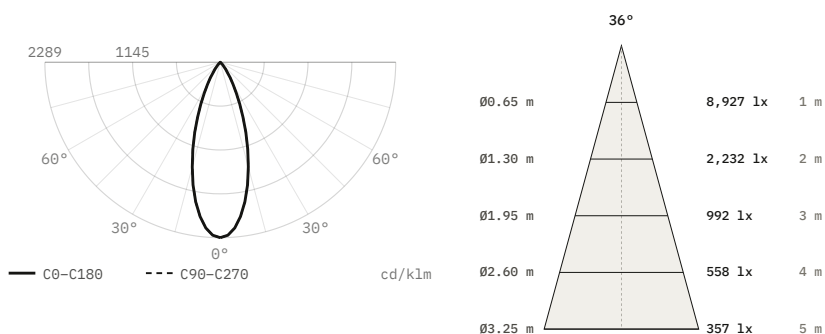

Luminous flux	3,900 lm
Efficacy	100 lm/W
Peak intensity	8,927 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	125 × 125 × 129 mm
Data	Calculated from catalogue data

