

Recessed

Grill DL0054

Recessed spotlight




Recessed spotlight. 26, 36, 52 or 66 W. Three beam angles, 15° to 36°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø115 mm
- LED source: Citizen

Power 26 W, 36 W, 52 W, 66 W	Voltage 2 × max 37 V	Luminous flux 2600–6600 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°
IP rating IP20	Certifications CE	Mounting Recessed
Control DALI, 0-10V	Finishes Black	

Dimensions

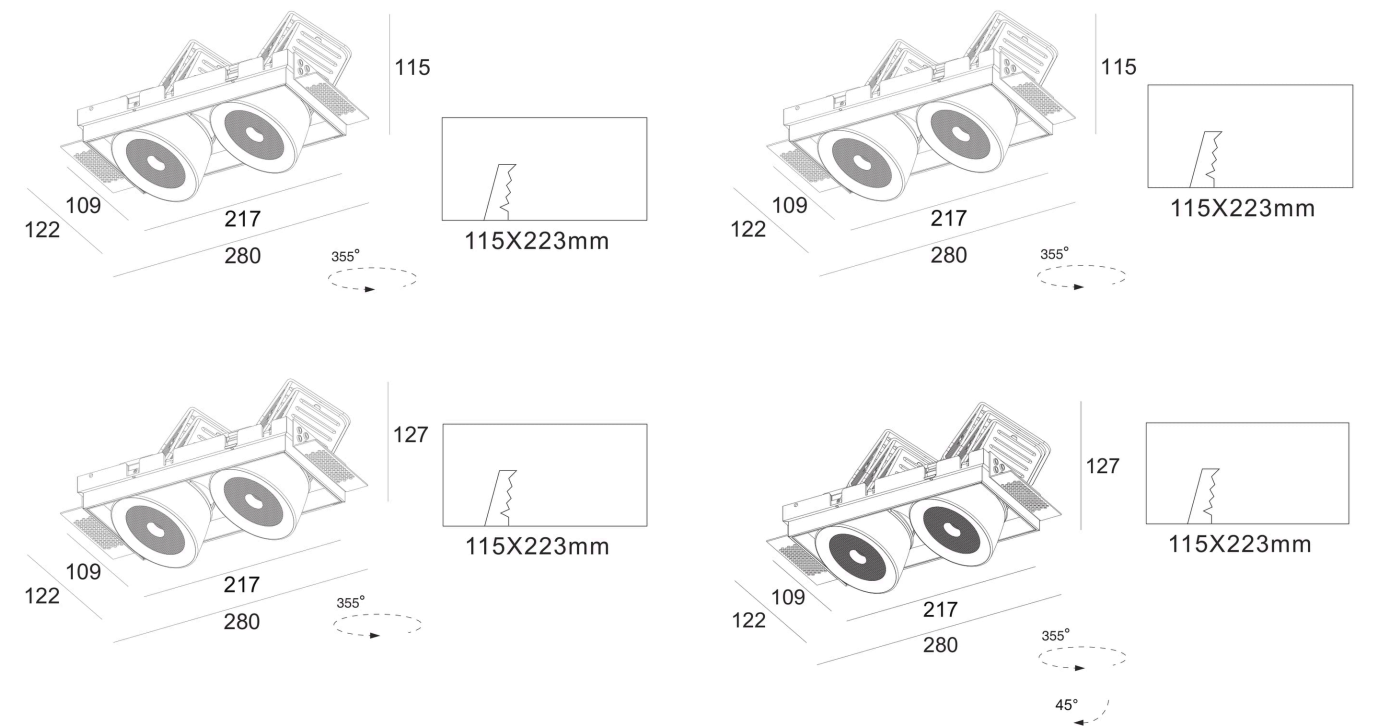


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0054	2 heads	26 W	2 × max 37 V	2 × 1300 lm	97 CRI	109, 122, 217, 280, H115 mm	Ø115 mm	15° 24° 36°	350 mA
DL0055	2 heads	36 W	2 × max 37 V	2 × 1800 lm	97 CRI	109, 122, 217, 280, H115 mm	Ø115 mm	15° 24° 36°	500 mA
DL0056	2 heads	52 W	2 × max 37 V	2 × 2600 lm	97 CRI	109, 122, 217, 280, H127 mm	Ø115 mm	15° 24° 36°	700 mA
DL0057	2 heads	66 W	2 × max 37 V	2 × 3300 lm	97 CRI	109, 122, 217, 280, H127 mm	Ø115 mm	15° 24° 36°	900 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0057, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0057, 66 W, 15° beam

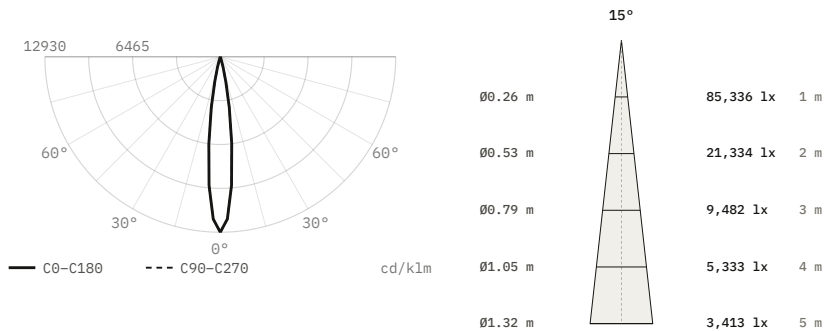


Luminous flux	6,600 lm
Efficacy	100 lm/W
Peak intensity	85,336 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	122 × 109 × 217 mm
Data	Calculated from catalogue data

DL0057, 66 W, 24° beam

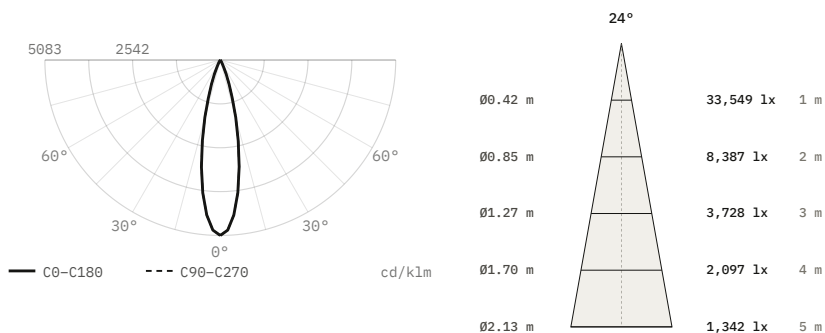

Luminous flux	6,600 lm
Efficacy	100 lm/W
Peak intensity	33,549 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	122 × 109 × 217 mm
Data	Calculated from catalogue data

DL0057, 66 W, 36° beam

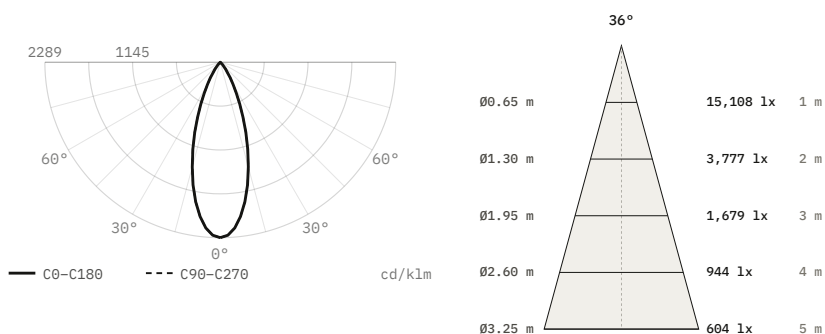

Luminous flux	6,600 lm
Efficacy	100 lm/W
Peak intensity	15,108 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	122 × 109 × 217 mm
Data	Calculated from catalogue data

