Recessed

Grill DL1322

Recessed spotlight

Recessed spotlight. 26 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø105 mm
- LED source: Citizen

Power **26 W**	Voltage **max 37 V**	Luminous flux **2600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

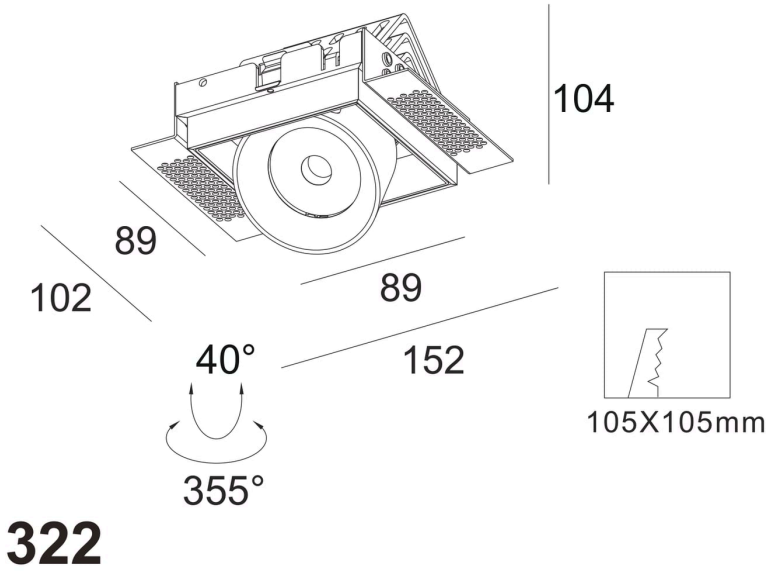

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1322	1 head	26 W	max 37 V	2600 lm	97 CRI	89, 102, 152, H104 mm	Ø105 mm	15° 24° 36° 60°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1322, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1322, 26 W, 15° beam

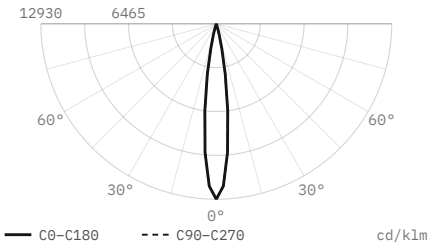

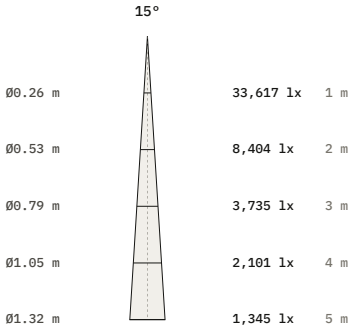

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	102 × 89 × 152 mm
Data	Calculated from catalogue data

DL1322, 26 W, 24° beam

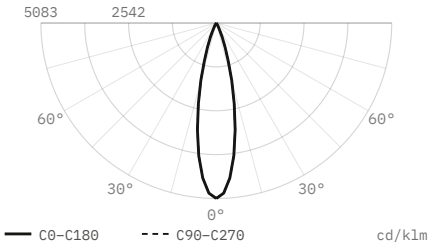

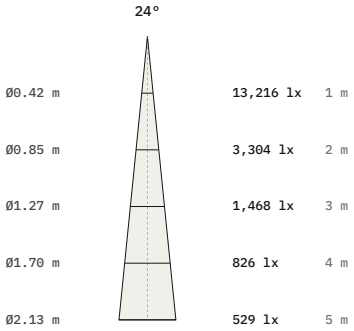

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	13,216 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	102 × 89 × 152 mm
Data	Calculated from catalogue data

DL1322, 26 W, 36° beam

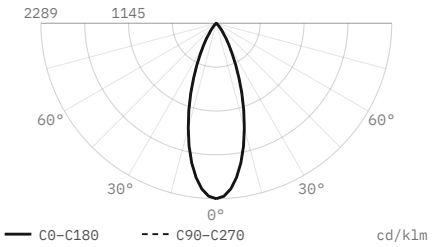

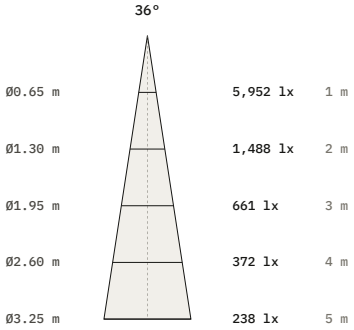

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	5,952 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	102 × 89 × 152 mm
Data	Calculated from catalogue data

DL1322, 26 W, 60° beam

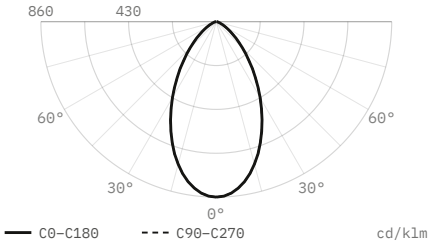

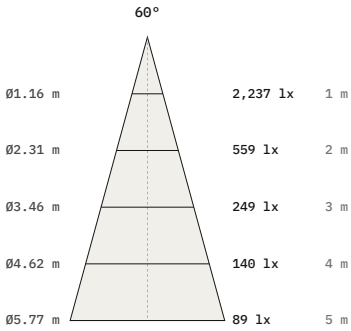

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	2,237 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	102 × 89 × 152 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.